Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

WAL-M-3X30-LED-120

LED Blasting Light - Flood Light - Magnet Mount - Polyurethane - 25' 6/3 Cord - 5400 Lumen - 90 Watt

Product ID: 47464

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

Portable, magnetic mount LED flood light with three 30 watt (90 watts total) lamps and a total of 300 pounds of magnetic grip. Large carrying handle enables the operator to easily carry and attach this flood light on any ferrous (steel, metal) surface. Molded polyurethane construction is ideal for indoor and outdoor applications. This floodlight is abrasive and chemical resistant. The polyurethane fixture can be washed, cleaned and even decontaminated after use. Originally designed for tank cleaning and tank blasting applications, this heavy duty back light can operate on etiher 120-240VAC setting, a 24 VDC setting, or a 12 Volt setting. **High voltage implementation is not appropriate for wet area use. Low voltage implementation is suitable for wet area use.**

MADE IN THE USA


The light frame is made from molded polyurethane, which encapsulates the two 4.5 inch diameter, 150 pound grip magnetic bases and three 30 watt, smooth surface, LED PAR 38 flood lights. The polyurethane encapsulation protects mounting surface from scratching by magnetic bases. The polyurethane absorbs shock, protecting the lamps and is impervious to rust, abrasives, chemicals and corrosion.
The portable, magnetic mount flood light ships with three 30 Watt smooth surface LED lamps.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

This light has industrial grade, smooth surface lens LED bulbs that have a 50,000 life hour expectancy all while producing 5400 lumen. A special seal is provided to create a water tight seal between the socket and the bulb inside the fixture. The supporting lens ring is easily removed and attached, enabling the operator to quickly and easily service the lamps, even with gloves on.

• Polyurethane construction eliminates the need for a ground wire.
• Silicone gasket seals socket eliminating potential shorting caused by airborne metallic dust and moisture.
• Large grips for secure handling, even with gloves.
• Polyurethane housing provides superior lamp protections guards against breakage from rough handling and vibration.
• Fixture is designed to ventilate heat away from the light for ease of handling.
• Suitable for all temperatures.
• 2 industrial capacity 5.25 inch diameter magnets, encapsulated in polyurethane for protection of the magnet base and any surface it is mounted to. Each magnet has 150 pounds of magnetic grip, for a total of 300 pounds of magnetic grip. This enables the operator to "stick" this light to any ferrous (steel, iron, etc) surface.
• Uses LED Par 38 fixtures in flood configuration. Smooth surface, LED Flood lamps are suitable for wet applications for low voltage versions ONLY. This fixture is not appropriate for wet areas in the high voltage applications.
• Weighs 16 pounds with cord. Dimensions: 16.5" L X 12" H X 9.5" W

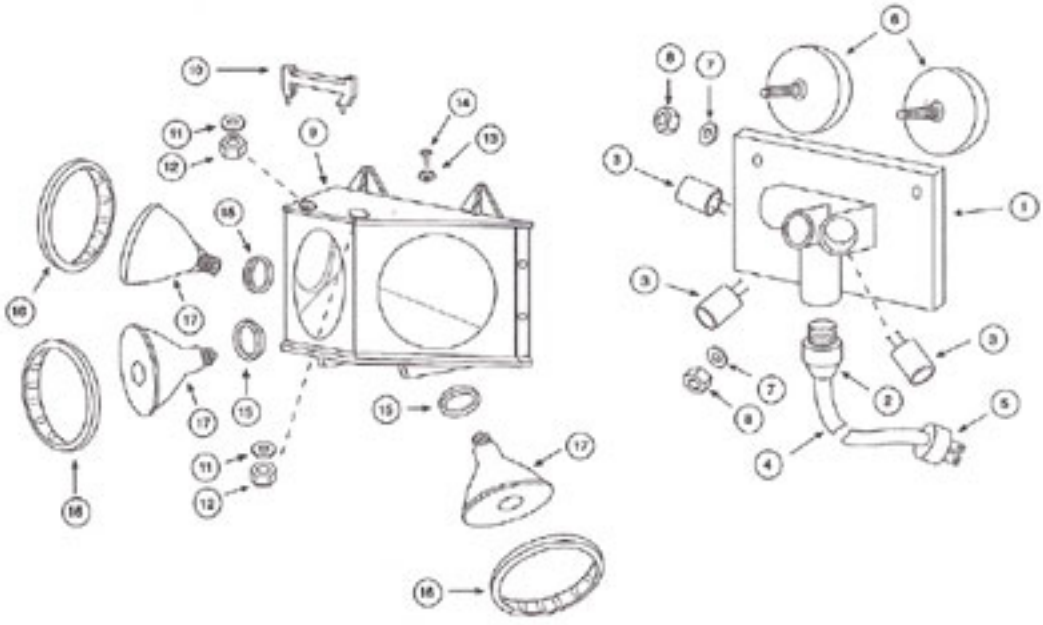

• Includes 25 foot, industrial grade 6/3 cord that is ¾ inch thick. SOOW cable is oil, chemical and abrasion resistant and is suitable for indoor and outdoor use to -58 degrees.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

WAL-M-3X30-LED-120

Product ID: 47464

Harmonized System (HS) Code: 9405.41.84.10
Export Control Classification Number (ECCN): EAR99

Options:

WAL-M-3X30-LED-120-Voltage-Plug

Example: WAL-M-3X30-LED-120-110.240VAC-WP

Voltage	
120-240VAC	-110.240VAC
12V DC	-12VDC
24V DC	-24VDC

Plug	
WALL PLUG	-WP
CIG PLUG	-CP

Links (Click on the below items to view):

- **Video1**
- **ISO 9001 Certification**
- **Business Certificate**
- **Shipping Time Map**