

EPP-4P-60A-P

Explosion Proof - 60Amp- Receptacle Plug

Product ID: 48505

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: EPP-4P-60A-P

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPP-4P-60A-P Explosion Proof Plug

Amp Rating: 60

Dimensions: 7.81"-L 3.81"-W

Configuration: 3 Pole 4 Wire

Suitable Cable Diameter: .500" to 1.375"

Current Rating: .600 Vac Max. 250 Vdc Max @60 amps

Material: .Copper Free Aluminum

Certifications - Compliance

Class 1 Div 1 & 2 Groups B, C and D

Class 2 Div 1 & 2 Groups F and G

Class 3

Class 3

NEMA 3/3R/5/7C/7D/9F/9G

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187


Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

Larson Electronics EPP-4P-60A-P Explosion Proof Plug

This explosion proof plug is compatible with our EPO-3W4P-60A power receptacles and is ideal for hazardous locations where flammable vapors, gases and dusts may be encountered. This plug is rated for 600 Vac Max. 250 Vdc Max @60 amps and is suitable for Class 1 Groups B, C and D and Class 2 Groups F and G. This explosion proof plug features non

sparking aluminum construction, recessed brass pins to prevent accidental contact, spin locking collar and a 60 amp current rating.



[Click Photo to Enlarge](#)

Inter-Compatibility: These plugs are cross-interchangeable with Crouse Hind™ APJ plugs under catalogue number "APJ6034" and Hubble-Killark VERSAMATE® plugs under catalogue number "VP6034". Any equipment requiring these C-H or H-K plugs should work with these plugs. Due to possible manufacturer changes we cannot guarantee interchangeability although we have made every effort to ensure cross compatibility correctness.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Motor-Generator Sets, Compressors, Wet areas or Locations Where Combustible Dust is Present.



Frequently Asked Questions (FAQ)

There are no Fags



Image: EPP-4P-60A-P



Image: EPP-4P-60A-P

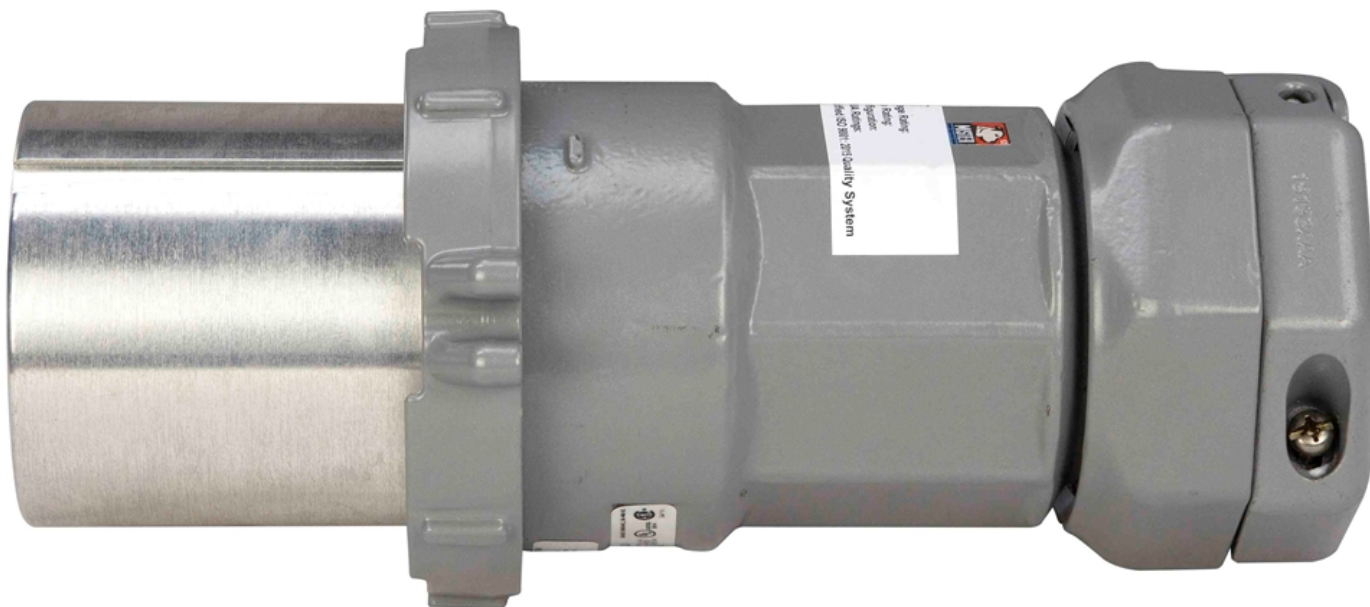


Image: EPP-4P-60A-P

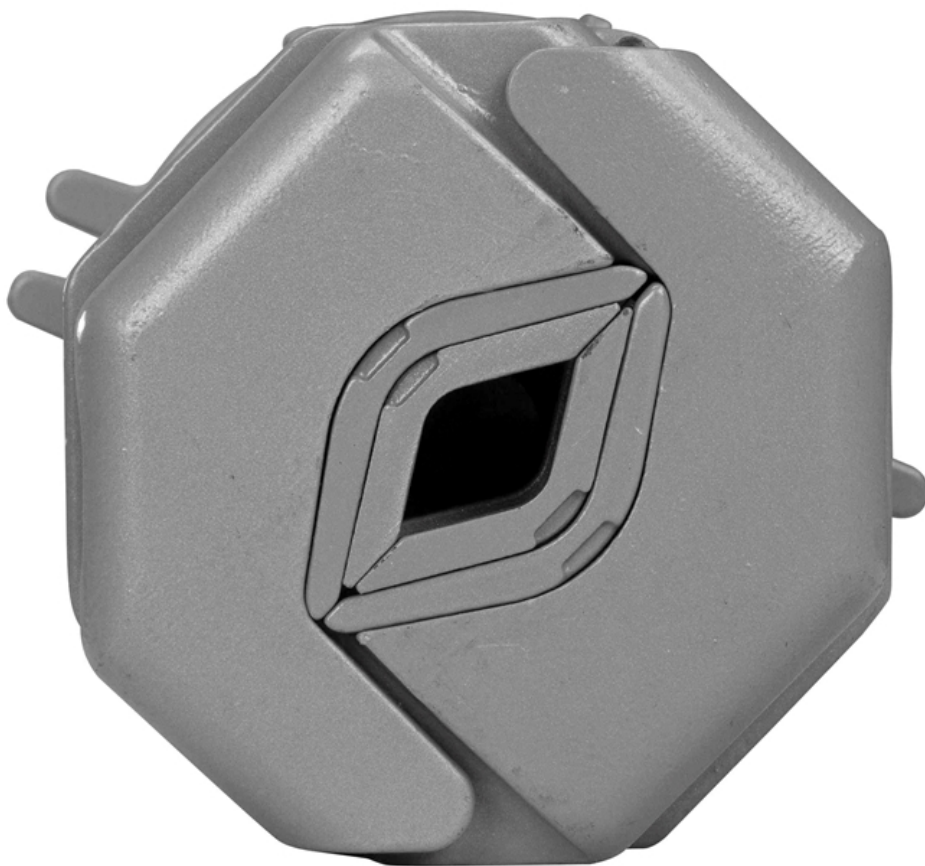


Image: EPP-4P-60A-P



Export Control Classification Number (ECCN): EAR99



Links (Click on the below items to view):

- **Operations Manual** (<https://www.larsonelectronics.com/images/product/Manual/48505.PDF>)
- **HigResPic1** (<https://www.larsonelectronics.com/images/product/HigResPic1/48505.JPG>)
- **HigResPic2** (<https://www.larsonelectronics.com/images/product/HigResPic2/48505.JPG>)
- **HigResPic3** (<https://www.larsonelectronics.com/images/product/HigResPic3/48505.JPG>)
- **HigResPic4** (<https://www.larsonelectronics.com/images/product/HigResPic4/48505.JPG>)
- **HigResPic5** (<https://www.larsonelectronics.com/images/product/HigResPic5/48505.JPG>)
- **HigResPic6** (<https://www.larsonelectronics.com/images/product/HigResPic6/48505.JPG>)
- **HigResPic7** (<https://www.larsonelectronics.com/images/product/HigResPic7/48505.JPG>)
- **ISO 9001 Certification** (<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate** (<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map** (<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)