

EPP-60A

Explosion Proof Plug- 60Amp- Pin and Sleeve Type

Product ID: 49484

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPP-60A Explosion Proof PLug

Amp Rating: 60

Dimensions: 8.44"-L 3.06"-W

Configuration: 4 Pole 3 Wire

Suitable Cable Diameter: .390" to 1.375"

Compatibility: Crouse-Hind Arktite Plugs #CES2214, Hubbell Killark plugs #KP-604D345

Cable Locking: Mechanical Cable Clamps

Plug Type: Pin and Sleeve

Voltage: 125-250VAC

Certifications - Compliance

Class 1 Division 1 & 2 Groups C & D

NRTL Certified to UL Standard: UL 1010 (UL 1203), UL 894, UL 1682, UL 1686

UL Listed: E10784

CSA Standard: C22. No 30, C22.2 No. 159, C22.2 No 182.1

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671


Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Larson Electronics EPP-60A Explosion Proof Plug

This explosion proof pin and sleeve plug is compatible with our [EPO-60A](#) power receptacles. This plug is rated for 60 amps and is approved Class I, Division 1 and 2, Groups C, D. This explosion proof plug features non sparking aluminum construction, recessed brass pins to prevent accidental contact, and a 60 amp current rating. This plug is designed to lock into our EPO-60A receptacles by pushing the plug into the receptacle, moving the sliding lock to the side, then pushing the plug in the rest of the way to fully seat and lock it into place.

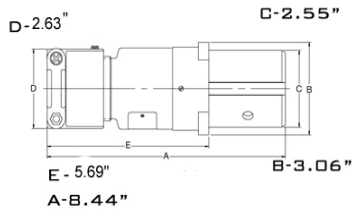

[Click Photo to Enlarge](#)

Inter-Compatibility: These plugs are cross-interchangeable with Crouse-Hind Arktite Plugs #**CES2214** and Arktite **CES** and **CESD** Arktite Receptacles and Hubbell Killark plugs #**KP-604D345**. Due to possible manufacturer changes we cannot guarantee interchangeability although we have made every effort to ensure cross compatibility correctness.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Motor-Generator Sets, Compressors, Wet areas or Locations Where Combustible Dust is Present.

Frequently Asked Questions (FAQ)

EPP-60A

Product ID: 49484

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)