

EPLRL-70-14.16-HR

Explosion Proof Cord Reel - Class I, Div I & Class II, Div II - 70' 14/16 SOOW Cord

Product ID: 71002

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPLRL-70-14.16-HR Explosion Proof Reel

Standard Features:

14/16 SOOW cable (15 Live + 1 Ground)
Spring activated ratchet
2-roller adjustable cable guide and ball
Built to UL 508 table 36.1/NEC Standards
Indoor or Outdoor Use
35 amp, 1-4 conductors 600 Volt, 5-12 conductors 250 Volt
Indoor Rugged fabricated steel and cast aluminum slip ring enclosure
Gray epoxy finish on all steel parts
10' feeder cord on fixed end

Safety Rating

Class I Division 1, Groups C & D
Class II Division 2, Groups E, F, & G
Zone 0, 1 & 2
Conforms to NEMA 7 & NEMA 9 standards

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

Made in the USA

The EPLRL-70-14.16-HR is an Explosion Proof Reel providing Class I, Division 1 UL rating, as well as a Class II, Division II. This reel is ideal for petroleum facilities, waste water treatment plants, grain storage and handling silos, paint booths, underground mines, chemical plants, and much more.

*****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS**

HAZARDOUS LOCATION LIGHT FIXTURE***

The unit includes 70 feet of 14/16 SOOW Cord rated at 600V and is ready to install a portable explosion proof fixture to the end. These reels are built with modular components, coupled with a spark proof ratchet and hazardous location slip ring housing. This cord reel is equipped with a standard two piece adjustable cable guide, a quick change spring canister replacement with external spring torque adjustment, and a 10 foot feeder cord. Larson Electronics offers a wide variety of lighting solutions to accommodate this reel. For more information on these lights, please contact us at 1-800-367-6671.



[Click Image to Enlarge](#)



[Click Image to Enlarge](#)




Frequently Asked Questions (FAQ)







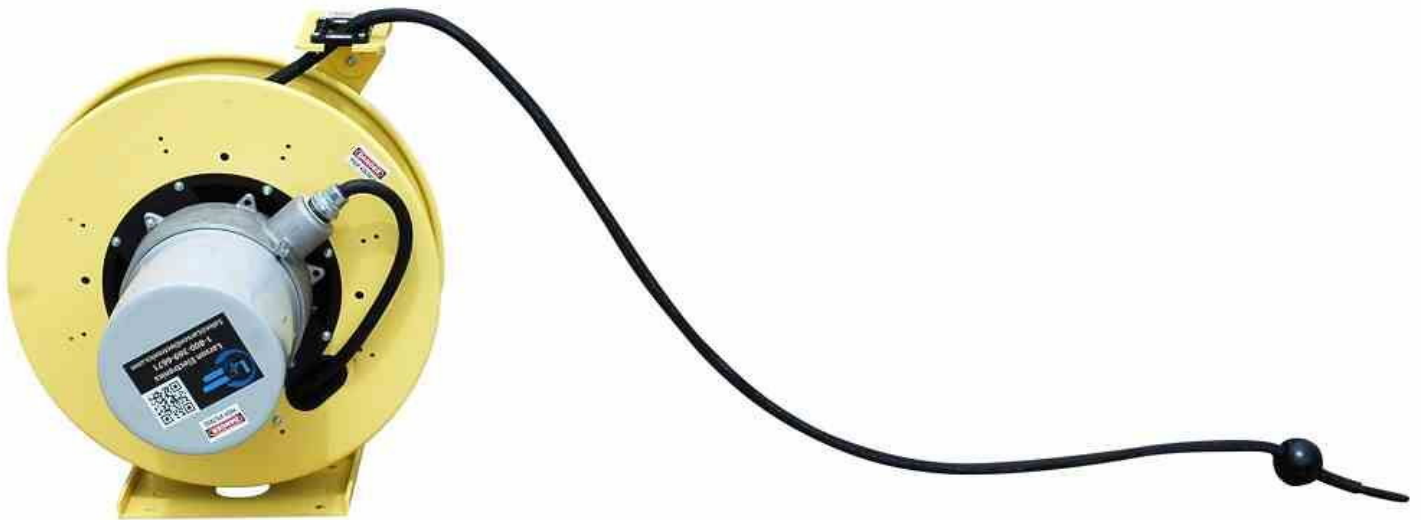

EPLRL-70-14.16-HR

Product ID: 71002

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [Dimensional Drawing 2D](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [HigResPic10](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)