

EPS-25A-3W

Explosion Proof Three Way Switch - Class I, Div. 1 & 2 - Class II, Div. 1 & 2 - 25 Amp Rated

Product ID: 71150

Please see last page for supporting documentation for this product (certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Image: EPS-25A-3W

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPS-25A-3W Explosion Proof Tumbler Switch

Switch Voltage Rating: 120-277 VAC

Switch Current Rating: 25 Amps- 1 HP @120 Vac & 2 HP @ 240 Vac

Grounding: Single Internal Housing Ground Screw

Configuration: Feed Through, Front Switch

Hubs: (2) 1/2" Feed Through

Unit Materials: Box/Receptacle- Malleable Aluminum, Sealing Chamber-Aluminum

Finish: Triple-coat—Zinc Electroplate, Chromate, Epoxy powder coat

Insulation: Integral Bushings in Conductor Openings

Mounting: External Mounting Lugs on Body

Unit Dimensions: 3.00"-W X 4.69"-D X 6.13 "-L

Switch Type: 3-way

Certifications - Compliance

Class 1 Division 1 & 2 Groups C, D

Class 2 Division 1 & 2 Groups E, F, G

Class 3

NEMA7- C&D, 9- E, F, G

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

The Larson Electronics EPS-25A-3W Explosion Proof Feed Through Three Way Switch


is UL Listed Class 1 Division 1 & 2 and Class 2 Division 1 & 2 and provides a safe and secure method for operators to interrupt power before connecting and disconnecting portable or stationary electrical devices and equipment in hazardous locations.

This explosion proof 3-way tumbler switch is ideal for operators seeking a high quality explosion proof switch rated for use in hazardous areas designated Class 1 Division 1 and Class 2 Division 1. This explosion proof switch is rated at 25 amps-120-277 Vac and 1 HP at 120 Vac and 2 HP at 240 Vac. The entire unit is constructed of malleable aluminum and contains an internal sealing chamber constructed of copper free aluminum. This unit is easily wall mounted via integral mounting tabs at two corners of the housing and provides two 1/2" hub openings located on the top and the bottom of the housing for running electrical conductors in a feed through configuration. A bushing seal at each conductor opening prevents damage to wiring insulation and a triple coat housing finish provides rugged protection against corrosion.

This unit is rated to handle electrical loads of 120-277 VAC up to 25 amps and is suitable for use in environments where combustible dusts and particulates may be present.



[Click Photo to Enlarge](#)

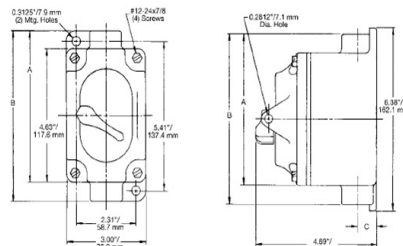

[Click Photo to Enlarge](#)

The EPS-25A-3W explosion proof switch cover and housing box is constructed of malleable aluminum with all arcing devices contained within an explosion proof labyrinth switch for the highest protection possible. The entire unit is triple coated with zinc electroplate, chromate, and a final epoxy powder coat for maximum durability and corrosion resistance. Each 1/2" hub opening is fitted with an integral bushing to prevent fraying or damage to insulation. Two external mounting lugs provide simple and secure mounting of the unit to walls and flat surfaces. The unit box, switch, and face plate are all included with the product.

1/2" NPT tapped conduit openings are provided on the top and bottom of the unit in feed through versions while dead end versions have a single conduit hub, providing easy and secure connection to main power line supplies.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Frequently Asked Questions (FAQ)

There are no Faqs



Image: EPS-25A-3W



Image: EPS-25A-3W



Image: EPS-25A-3W



Image: EPS-25A-3W

EPS-25A-3W

Product ID: 71150

Export Control Classification Number (ECCN): EAR99

Options:

EPS-25A-3W-Termination-Hub Config

Example: EPS-25A-3W-FT-0.75IN

Termination		Hub Config	
FEED THROUGH	-FT	3/4	-0.75IN
DEAD END	-DE	1/2	-0.5IN



Links (Click on the below items to view):

- **Dimensional Drawing 2D** (<https://www.larsonelectronics.com/images/product/DimensionalDrawing/71150.PDF>)
- **Operations Manual** (<https://www.larsonelectronics.com/images/product/Manual/71150.PDF>)
- **STEP File (3D CAD Model)** (<https://www.larsonelectronics.com/images/product/Step/71150.ZIP>)
- **Wiring Diagram** (<https://www.larsonelectronics.com/images/product/WiringDiagram/71150.PDF>)
- **HigResPic1** (<https://www.larsonelectronics.com/images/product/HigResPic1/71150.JPG>)
- **HigResPic2** (<https://www.larsonelectronics.com/images/product/HigResPic2/71150.JPG>)
- **HigResPic3** (<https://www.larsonelectronics.com/images/product/HigResPic3/71150.JPG>)
- **HigResPic4** (<https://www.larsonelectronics.com/images/product/HigResPic4/71150.JPG>)
- **HigResPic5** (<https://www.larsonelectronics.com/images/product/HigResPic5/71150.JPG>)
- **HigResPic6** (<https://www.larsonelectronics.com/images/product/HigResPic6/71150.JPG>)
- **HigResPic7** (<https://www.larsonelectronics.com/images/product/HigResPic7/71150.JPG>)
- **HigResPic8** (<https://www.larsonelectronics.com/images/product/HigResPic8/71150.JPG>)
- **Video1** (<https://www.youtube.com/watch?v=c4CSEZUgOAE>)
- **ISO 9001 Certification** (<http://larsonelectronics.com/images/pdfdocs/ISO9001.PDF>)
- **Business Certificate** (<https://www.larsonelectronics.com/images/pdfdocs/w9.PDF>)
- **Shipping Time Map** (<https://www.larsonelectronics.com/images/product/ShippingTimeMap/ShippingTimeMap.pdf>)