

EPSLED-80-AM-50

Adjustable Magnetic Mount Explosion Proof LED Strobe Light - 7 Watts - 50' Cord - EXP Plug

Product ID: 71438

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPSLED-80-AM-50 Explosion Proof Strobe Light

Lamp Type: LED

Lamp Dimensions: 7.25"-Wide, 21" Height

Lamp Weight: 9 lbs

Hub: 3/4" Threaded

Voltage: 120-277V AC, 12V DC or 24V DC

Lighting Configuration: Strobing Flash or Steady Burn

Mounting: 400 lb magnetic grip base

Temp Rating: T3C

LED Watts: 7W

Strobe Count: 4 Per Second

Wiring: 50' cable w/ EXP Plug

Cord Cap: 5-15 or 6-20 (C1D1) or flying leads

Lamp Life: 50,000+ Hours

U.L Ratings

Class 1, Groups C and D

Class II, Groups E and F

Class III, Groups E, F and G

IP67 (water proof)

Suitable for Paint Spray Booths

T3C Temperature Rating

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com




Frequently Asked Questions (FAQ)







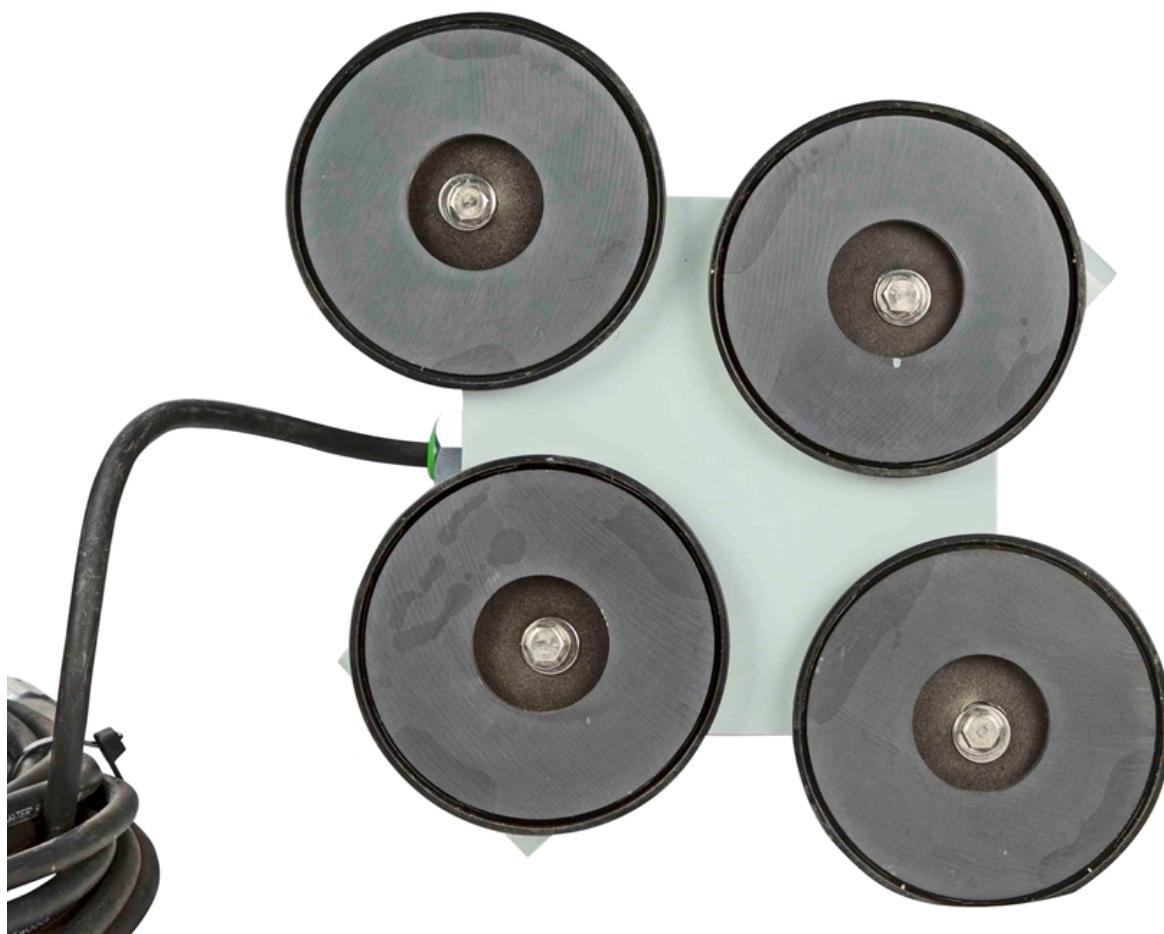

EPSLED-80-AM-50

Product ID: 71438

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Options:

EPSLED-80-AM-50-Voltage-Light Color-Light Config

Example: EPSLED-80-AM-50-1523-RED-STB

Voltage	
120V	-1523
220-240V	-2023-250V

Light Color	
RED	-RED
GREEN	-GRN
BLUE	-BLU
AMBER	-AMB
WHITE	-WHT

Light Config	
STEADY BURN	-STB
STROBE	-STROBE

Links (Click on the below items to view):

- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Operations Manual](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)