Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671


www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

HAL-48-2L-LED-BMSW-50C

Class 1 Div 2 LED Pivoting Light - 4 Foot 2 Lamp - 50' SOOW w/ EXP Plug - Offshore LED Rig Light

Product ID: 72922

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).

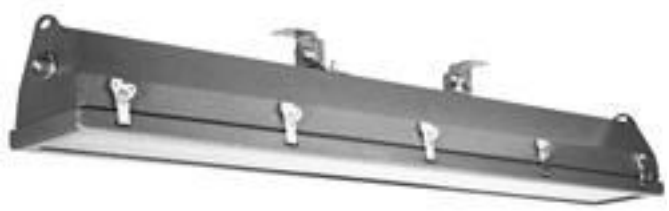

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

HAL-48-2L-LED-BMSW-50C Hazardous Area Rig Light
NRTL Listed for United States & Canada
Dimensions: 51.1"-L x 7.09"-W x 8.65"-H
Weight: 26.5 Lbs
Total Watts: 48 watts
Total Lumens: 4320
Voltage: Universal 120-277V AC 50/60Hz or 12-24V DC
LED Lamp Life Expectancy: 50,000 Hours
Efficiency: 90 Lumens per Watt
Operating Temp Range: T4A rated -40°C to +65°C
Beam Angle: 150 degrees
Color Temp: 5300K- Color Rendering Index-75
Mounting: Back Mount Swivel Bracket
Wiring: 50` SOOW Cable w/ EXP Cord Cap
Cord Cap: C1D1 Rated - 5-15, 5-20, or 6-20 config.
Materials: Sheet aluminum housing, acrylic lens

Ratings/Approvals
Class 1 Division 2, Groups A, B, C & D
NRTL Certified to UL 844
NRTL Certified to UL 1598A Marine Type
Listed for Canada
T4 Temperature Rating
Meets USCG Specs
California Title 24 Compliant
IP65 Rated

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics HAL-48-2L-LED-BMSW-50C Hazardous Area LED Light Fixture with 50` cord and explosion proof plug is NRTL Listed for United States and Canada Class 1 Division 2 Groups A, B, C and D, NRTL Certified to UL 1598A listed, has a T4A temperature rating and ideal for hazardous locations where flammable chemical/petrochemical vapors may be

occasionally encountered.
The HAL-48-2L-LED-BMSW-50 fixture is a 4 foot long, 2 lamp, Class 1 Division 2 Groups A, B, C and D hazardous area LED light that takes the reliability and efficiency of a fluorescent fixture and adds even longer lamp life and efficiency with high output LEDs. This fixture is T4A temperature rated and comes standard with our high power 24 watt LED lamps. The lamps are protected by a powder coated aluminum frame and shatter and heat resistant clear acrylic lens secured with ten zinc coated steel draw latches.
The fixture is constructed of copper free sheet aluminum and powder coated. The lamp reflector is corrosion resistant heavy gauge aluminum and coated with a high gloss reflective finish. This fixture can be configured to run on 120 to 277VAC as well as 12-24VDC. This hazardous location LED fixture is Class 1 Division 2 rated, NRTL Certified to U.L. 844 and UL 1598A Marine Type approved for use marine environments, and meets USCG specs. The HAL-48-2L-LED-BMSW is weatherproof and provides operators in hazardous locations with a highly efficient, reliable and affordable lighting solution for open areas where flammable chemicals and vapors may occasionally be present.



Click Photo to Enlarge



Click Photo to Enlarge



Click Photo to Enlarge

We have eliminated the ballast normally associated with fluorescent fixtures which reduces overall weight, increases lamp life to an extreme 50,000 hours and helps this LED fixture maintain a T4A temperature rating. The solid state design of the included LED lamps give this fixture superior resistance to damage from vibrations and extremes in temperature as well as a lamp service life over twice that of standard T8 bulbs. The 24 watt LED lamps produce more illumination than standard T8 bulbs. The current generation of our LED T-series style bulbs produce 15% more light than standard T8 bulbs.
The light is equipped with 50` of SOOW cable terminated in a Class 1 Division 1 explosion proof cord cap. The cord cap is offered in three different configurations: 5-15 straight blade plug for 120V, 5-20 twist lock plug for 125V, and 6-20 twist lock plug for 250V. This fixture is universial-voltage capable (not multi-tap) and works on the following voltages: 120 Volt 60 HZ, 220 Volt 50 HZ, 240 Volt 60 HZ, 277 Volts 60 HZ. We also make a 12-24V DC version for low voltage applications (-LV suffix). Our HAL-48-2L-LED-BMSW LED light fixture is NRTL Listed for U.S. and Canada.

Energy Consumption Comparison

	T5HO	T8	LED
Wattage	108 watts	64 watts	48 watts
Amp Draw @ 120V AC	0.9 amps	0.54 amps	0.4 amps
Amp Draw @ 277V AC	0.39 amps	0.24 amps	0.18 amps
Amp Draw @ 12V DC	9 amps	5.34 amps	4 amps
Amp Draw @ 24V DC	4.5 amps	2.67 amps	2 amps
Lamp Life Expectancy	20,000 hours	24,000 hours	50,000 hours
Color Temperature	5000K / 4100K	4100K	5300K
Operation cost per year (8hs/day @ 11c/kWh)	$34.69	$20.56	$15.42

Standard Surface Mount Brackets: Each L bracket is cinched to the bracket mounting peg on each side of the light. The angle of the bracket is set by tightening two bolts on either side of the bracket. The bolts act as a set screw. The bracket itself is mounted via a single bolt hole at the top the bracket. There are two brackets. Once

the brackets are mounted to a surface (ceiling, floor or wall), the light fixture can be pivoted by loosening the that hold the bracket to the mounting peg. This fixture allows 45 degrees of pivot from the 90 degree point.
Suggested Applications: Aircraft maintenance, Oil drilling rigs, Refineries, Solvent and cleaning areas, Chemical manufacturing, Waste treatment plants, Gas processing plants.

Made in USA Quality

1. Each unit dialectically tested.
2. Fixture arrives assembled and lamped to reduce installation time and cost. Adjustable mounting brackets enable the operator to choose any mounting angle for the fixture, where other models may only offer one or three choices.
3. Fixture constructed streamlined ribbed corrosion-resistant, copper free sheet aluminum body for better hear dissipation and extended ballast life.
4. Aluminum lens frame for greater strength
5. Relamping done via 10 draw latches, which enable the operator to unlatch the lens and access the lamps.
5. Heavy gauge extruded aluminum reflectors with high gloss reflective finish. Resists dents and corrosion.
6. 1/2" or 3/4", threaded access hole for wiring conduit.
7. Units can be wired end to end in series.

Superior LED Benefits

1. 50,000 hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off – No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)







Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

HAL-48-2L-LED-BMSW-50C
Product ID: 72922

Warranty: 60 Months

Harmonized System (HS) Code: 9405.41.84.10
Export Control Classification Number (ECCN): EAR99

Options:
HAL-48-2L-LED-BMSW-50C-Voltage-Color Temp-Cord Cap
Example: HAL-48-2L-LED-BMSW-50C-1227VAC-5600K-5.15

Voltage	
120V-277V	-1227VAC
12-24VDC	-1224VDC

Color Temp	
5600K	-5600K
4100K	-4100K

Cord Cap	
5-15	-5.15
5-20	-5.20
6-20	-6.20

Links (Click on the below items to view):

- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- HigResPic6
- HigResPic7
- HigResPic8
- Video1
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map