


EPL-SL-5-5X-FL1524-LED

Explosion Proof LED Aluminum String Lights - Class 1 Div 1 - 5 Lights - SOOW Cord - 2' Drop Lights

Product ID: 73043

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).

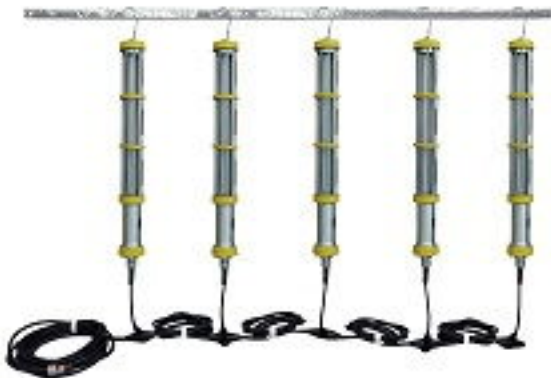

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-SL-5-5X-FL1524-LED String Lights

Lamp Type: LED Tube Lamp

Dimensions: Lamp Only- L-27 " Dia-3.25"

Lamp Lengths: 2 Foot

Weight: 14.5 lbs per unit

Total Watts: 75 watts

Lumens per Lamp: 1800

Total Lumens: 9000

Luminous Efficiency: 120 Lumens per Watt

Voltage: 110-277V 50/60Hz - 12-24V AC/DC

Mounting: Aluminum Hook

Wiring: 35` 12/3 SOOW Backbone - 2` 16/3 SOOW Drop

Cord Cap: Explosion Proof 5-15 Straight Blade Plug

U.L. Ratings

Class 1, Division 1 & 2 for Group D

Class II, Division 1 Groups E, F, G

Class III, Division 1 & 2

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA


The Larson Electronics EPL-SL-5-5X-FL1524-LED Hazardous Area LED String Light Set is UL Listed Class 1 Division 1 & 2. The 2 foot long 15 watt LED tube lamps on this this hazardous location light set provide higher quality light than higher wattage incandescent lights and more light than previous fluorescent lamp equipped models. This string light set is suitable for exposure to vapors and dusts and ideal for use in

confined spaces like fuel tanks or grain storage areas and inspection activities in hazardous locations requiring explosion proof protection.

This 5 lamp explosion proof LED string light set from Larson Electronics.com comes complete with a 35 foot long 12/3 SOOW backbone for long range and convenient operation. Each lamp on this hazardous location area stringer features a rugged, non-sparking aluminum casing and unique rod cage and produces cool, glare-free, shadowless light that improves safety in hazardous locations and maximizes lighting efficiency with built-in metal reflectors. 5' of 12/3 SOOW cable between each junction provides sufficient space between lamps, with a 10' whip terminated in an explosion proof plug. Each lamp is equipped with 2' of 16/3 SOOW between the lamp and the junction.

These LED lights improve on the desirable qualities of similar fluorescent models with higher output and better light quality and are ideal for paint booth applications, storage container inspections, and applications involving confined spaces such as tank cleaning and industrial container maintenance.


The high light output, good light color and evenness of coverage makes these string lights ideal for a wide variety of close quarter work and inspection activities. These lamps are universal voltage and can operate on a range of voltages from 110 volts to 277 volts AC 50/60 Hz. We also offer a low voltage model that operates on 12-24 volts AC/DC.



40' Container Dark



Container With EPL-SL-10-FL1524-LED



Click Photos to Enlarge

The 15-watt LED lamp used in this unit provides as much illumination as higher-wattage incandescent lamps without the associated heat, reducing the chances of accidents or burns. This lamp has no ballast, which reduces lamp weight, an impact resistant tube shield with specially designed annealed glass, and an aluminum hook for easy overhead mounting. This unit incorporates (3) 15 watt LED drop lights connected in series and is suitable for use in areas where petrochemical vapors and various dusts are present. The output of this string light is stronger and of better quality than sets equipped with 100 watt incandescent bulbs, yet it uses only 15% as much electrical current.

Lamp Features

- 2 foot 15 watt LED Tube Lamp 50,000 hour service life
- Non-sparking aluminum housing
- No Ballast
- Molded rubber bumper guards
- Annealed glass tube shields prevent shattering
- Integrated lamp shock absorbers prevent drop damage to bulbs
- Swivel hook for hanging and hands free operation
- 12/3 Backbone with 16/3 Drops

Frequently Asked Questions (FAQ)



EPL-SL-5-5X-FL1524-LED

Product ID: 73043

Harmonized System (HS) Code: 9405.41.84.10

Export Control Classification Number (ECCN): EAR99

Options:

EPL-SL-5-5X-FL1524-LED-Voltage

Example: EPL-SL-5-5X-FL1524-LED-120V

Voltage	
120V AC	-120V
240V AC	-240V
24V AC/DC	-24V

Links (Click on the below items to view):

- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [Video1](#)
- [Video2](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)