Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EPLC2-HB-100LED-RT-UVA

150W Explosion Proof Ultraviolet LED Light Fixture - C1D2/C2D1 - Paint Spray Booth Approved

Product ID: 105800



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPLC2-HB-100LED-RT-UVA - C1D1 Ultraviolet LED Light

Listing: United States - Canada
Lamp Type: LED
Dimensions: 14"H x 16"W 5"D
Weight: 32 lbs
Voltage: 100-277 Volts AC, 50/60Hz or 11-25 Volts AC/DC
Total Watts: 150W
Total Intensity: 46,550 mW
Efficiency: 350 mW/w
Lamp Life: 50,000+ Hours
Light Color: Ultraviolet- 365NM
Wavelength Curve: 350-400NM - Peak @ 365NM
Lighting Configuration: Flood Pattern
Power Efficiency: >95%
Power Factor: 0.992
Ambient Operating Temp Range:-50° C to +65°C
Operating Temp Rating: T5
Housing Material: Copper Free Cast Aluminum
Housing Finish: Epoxy Powder Coated - Grey
Lens Material: Hardened Borosilicate Glass
Gasket Material: Silicone
Mounting: 3/4" Pendant & Swivel Mount - Both Ship w/ Fixture
Wiring: 10` 16/3 SOOW w/ Flying Leads
Wiring Hub: 3/4" NPT

Ratings/Approvals

Listed for United States and Canada
Class I, Divisions 2, Groups C,D
Class II, Divisions 1 & 2, Groups E,F,G
Class III
Certified to UL 844 Ed. 13
Certified to UL 1598
Certified to C22.2 No. 137 Rev 2009
Certified to C22.2 No. 250.0
Certified to C22.2 No. 30-M-1986 Rev 2012
T5 Temperature Rating
Paint Spray Booth Approved
IEC 60529 Tested
IP67 Rated Waterproof
Multiple Driver Banks
80% Intensity Retention after 50,000 Hours
Factory Sealed Light Fixture
Recommended 15` to 40` Mounting Height

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364


The Larson Electronics EPLC2-HB-100LED-RT-UVA Explosion Proof Ultraviolet light fixture provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries with UV cutoff filters. LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older incandescent, metal halide and high pressure sodium lights. This fixture uses advanced LED light technology to produce ultraviolet light and is T6 rated for hazardous locations where UV lamps are used in paint and adhesive curing, food inspection or for non-destructive testing.
This Class 1 Division 2, Class 2 Division 1 & 2 explosion proof UV light fixture provides 46,550 mW of high quality ultraviolet light while drawing only 150 watts. This high output UV LED fixture provides a 6,384 µW/cm2 center beam maximum intensity at 12" while providing a minimum 2,660 µW/cm2 intensity over a 14" by 14" area. The EPLC2-HB-100LED-RT-UVA is typically used for curing coatings or adhesives and for non-destructive testing applications. This fixture has been thoroughly tested with the DuPont line of ultraviolet curable paint and primers, accelerating the cure times over metal halide fixtures with surface temperatures as low at 55°F.
The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 50,000 hour rated lifespan with 80% intensity retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install. This fixture can operate on voltages ranging from 120V-277V 50/60Hz and is ETL approved for use in hazardous environments, paint spray booths, wet environments, and areas where UV lamps are used in paint and adhesive curing, food inspection, and for non-destructive testing.



Click Photo to Enlarge



Click Photo to Enlarge



Click Photo to Enlarge







The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twelve individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.
The EPLC2-HB-100LED-RT-UVA uses ultraviolet LED light technology, a technology that is far better in energy saving than traditional fluorescent bulbs used for the same purposes. Traditional ultraviolet lights require a coating to block out visible light or a special composition of gases and chemicals used to create a higher concentration of ultraviolet light. This process, however, also produces many other wavelengths of light which go unused and end up as wasted energy. LED lights are unique in that they have a narrower wavelength band than traditional ultraviolet sources and therefore do not require these special coatings. As a result, LED lights


do not produce unused, wasted light and therefore consume less energy than traditional UV lights on the market. LED lights have the added benefit of being capable of producing very specific wavelengths with tighter curves and are more durable and light weight as well. This eliminates harmful UV-B and UV-C wavelengths from being emitted from the light source, adding in productivity and safety during operation.
Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current applied and emitting light. With LED lights, there is no warm up time or cool down time before re-Striking and provide instant illumination when powered on, adding to the reliability of LED technology. By nature, LED light sources run significantly cooler than traditional lamps, reducing the chance of accidental burns and increased temperatures due to heat emissions. This solid state design of light emitting diodes provides a more reliable, stable, durable, and energy efficient light source over traditional lighting.

	400W MH	**100W LED**
Wattage	400 watts	100 watts
Amp Draw @ 120V AC	3.34 amps	0.84 amps
Amp Draw @ 24V DC	16.67 amps	4.17 amps
Lamp Life Expectancy	15,000	50,000+ Hours
Wavelength	320-400NM	350-380NM
Operation Cost per Year (8hs/day @ 11c/kWh)	$138.12	$32.12

The Class 1, Division 2 LED ultraviolet light fixture can be used for non-destructive testing in aviation and manufacturing, food processing and inspection, and in paint, coating, and adhesive curing. The EPLC2-HB-100LED-RT-UVA provides operators in hazardous locations with a reliable and durable UV lighting solution that combines effective production of UV light with explosion proof protection and is applicable for leak detection, paint spray booths, ink, coatings, and adhesive curing, non-destructive testing, inspection, and food processing.
This light is universal voltage capable and can be operated with 100-277 VAC, 50/60Hz. We also offer a low voltage version of this LED fixture that operates on AC/DC voltages from 11-25 Volts. This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

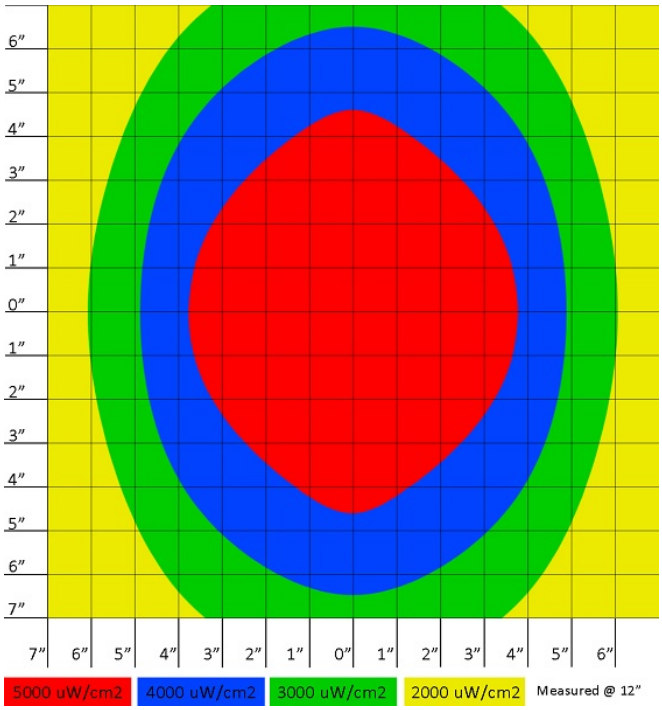

Click Photo to Enlarge

This LED light produces 46,550 mW with a wavelength curve of 350-380NM.
2,563 µW/cm2 center point irradiation at 2` away from lamp.
1,298 µW/cm2 center point irradiation at 3` away from lamp.
775.5 µW/cm2 center point irradiation at 4` away from lamp.
550 µW/cm2 center point irradiation at 5` away from lamp.
440 µW/cm2 center point irradiation at 6` away from lamp.
302 µW/cm2 center point irradiation at 7` away from lamp.
The EPLC2-HB-100LED-RT-UVA offers several mounting options including ceiling mounting, pendant mounting, wall mounting and cable mounting. The standard version of this explosion proof LED fixture includes a pendant mount and a surface mount option.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

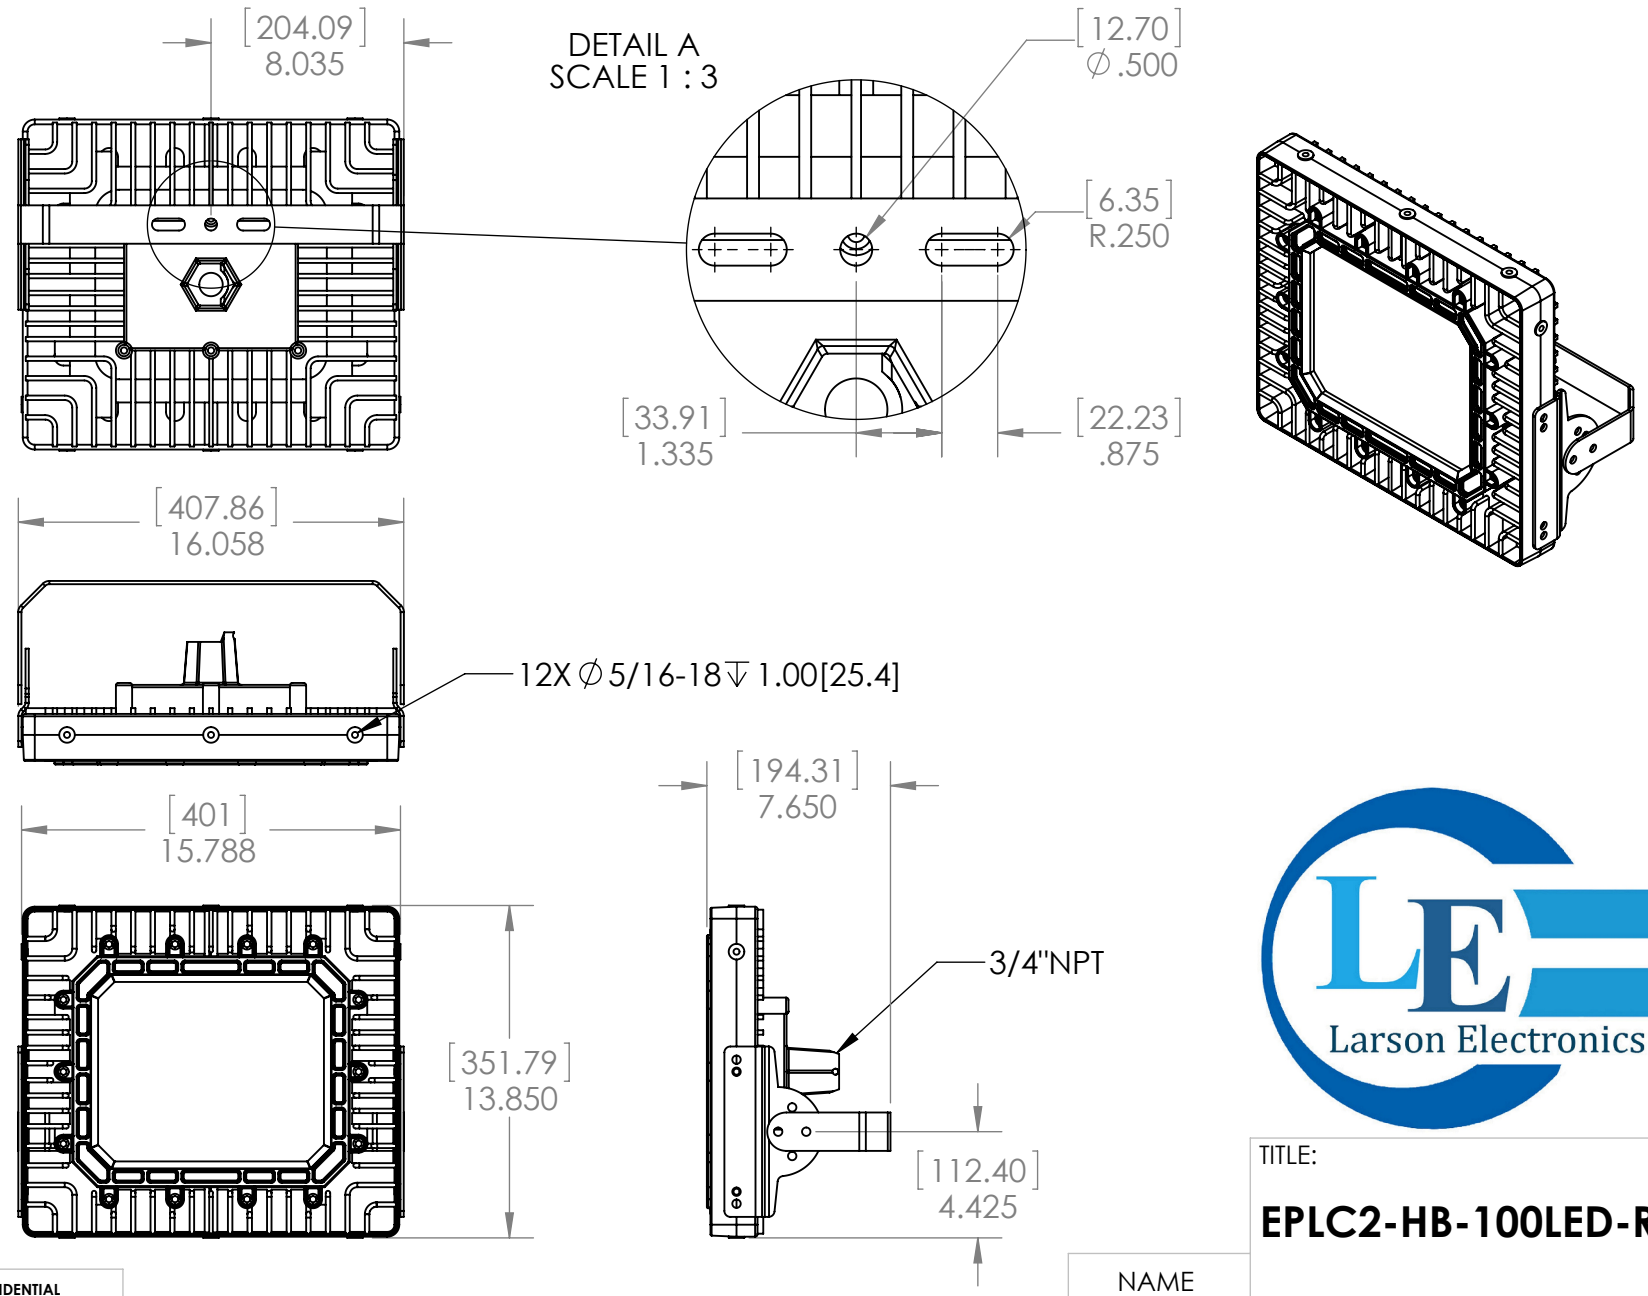

Larson Electronics

TITLE:

EPLC2-HB-100LED-RT-UVA


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.


		NAME
DIMENSIONS ARE IN INCHES	DRAWN	CHRIS THAUER
MATERIAL	CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING		


SIZE	DWG. NO.	REV
A		


SCALE: 1:8 | SHEET 1 OF 2

5 4 3 2 1

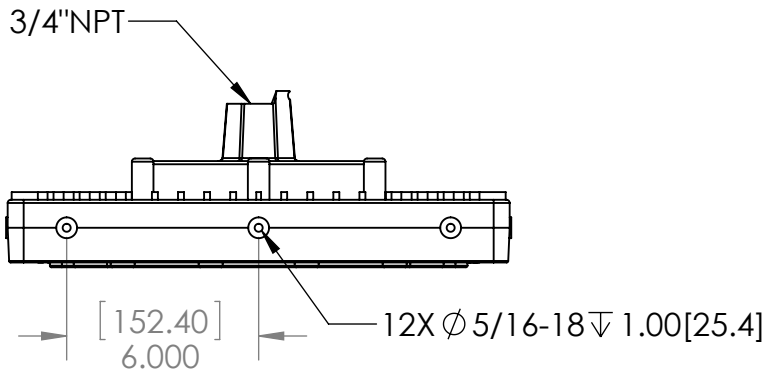

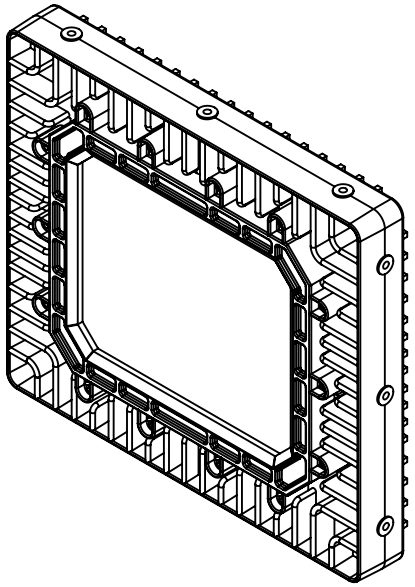

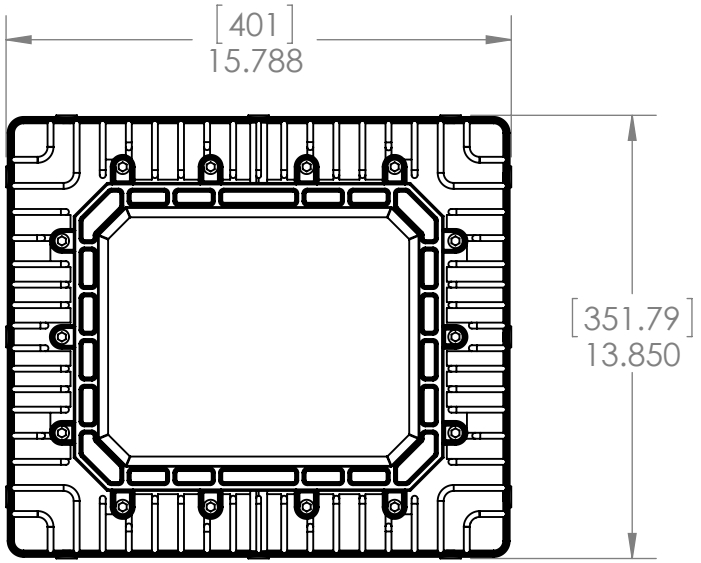

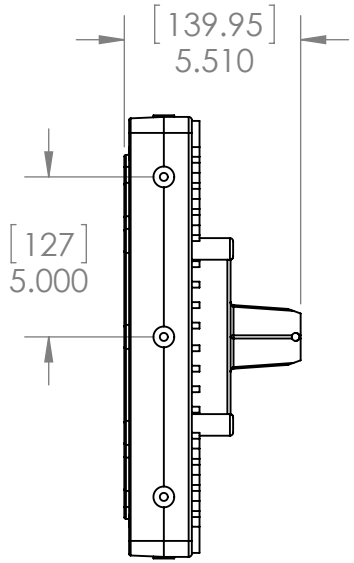

Larson Electronics

TITLE:

EPLC2-HB-100LED-RT-UVA

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.


		NAME
DIMENSIONS ARE IN INCHES	DRAWN	CHRIS THAUER
MATERIAL	CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING		

SIZE	DWG. NO.	REV
A		


SCALE: 1:6 SHEET 2 OF 2

5 4 3 2 1


POSITION 1

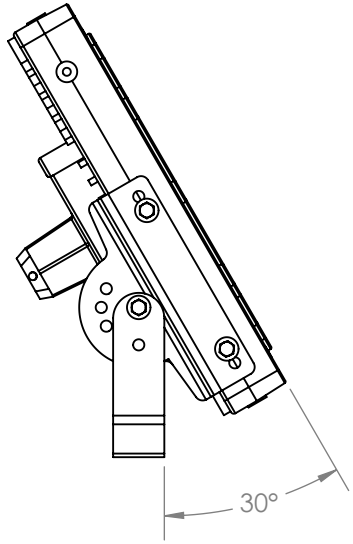


POSITION 2

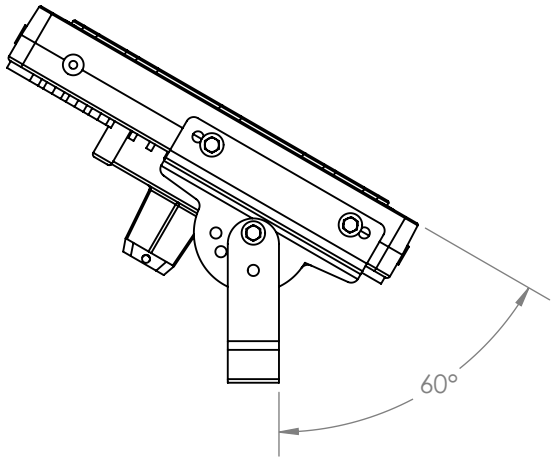


POSITION 3

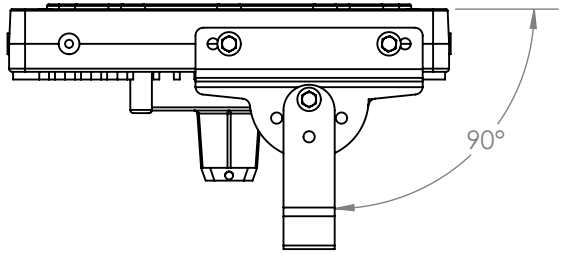

POSITION 4

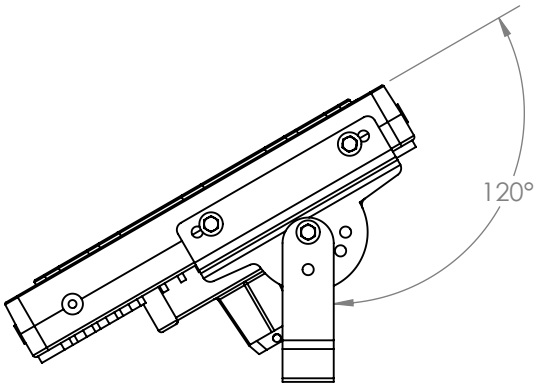

POSITION 5

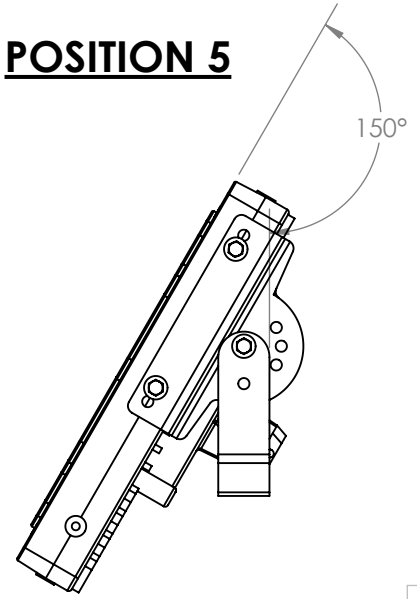

Larson Electronics

TITLE:

EPLC2-HB-100LED-RT-UVA


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

		NAME
DIMENSIONS ARE IN INCHES	DRAWN	CHRIS THAUER
MATERIAL	CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING		

SIZE	DWG. NO.	REV
A		

SCALE: 1:6 | SHEET 1 OF 1

5 4 3 2 1

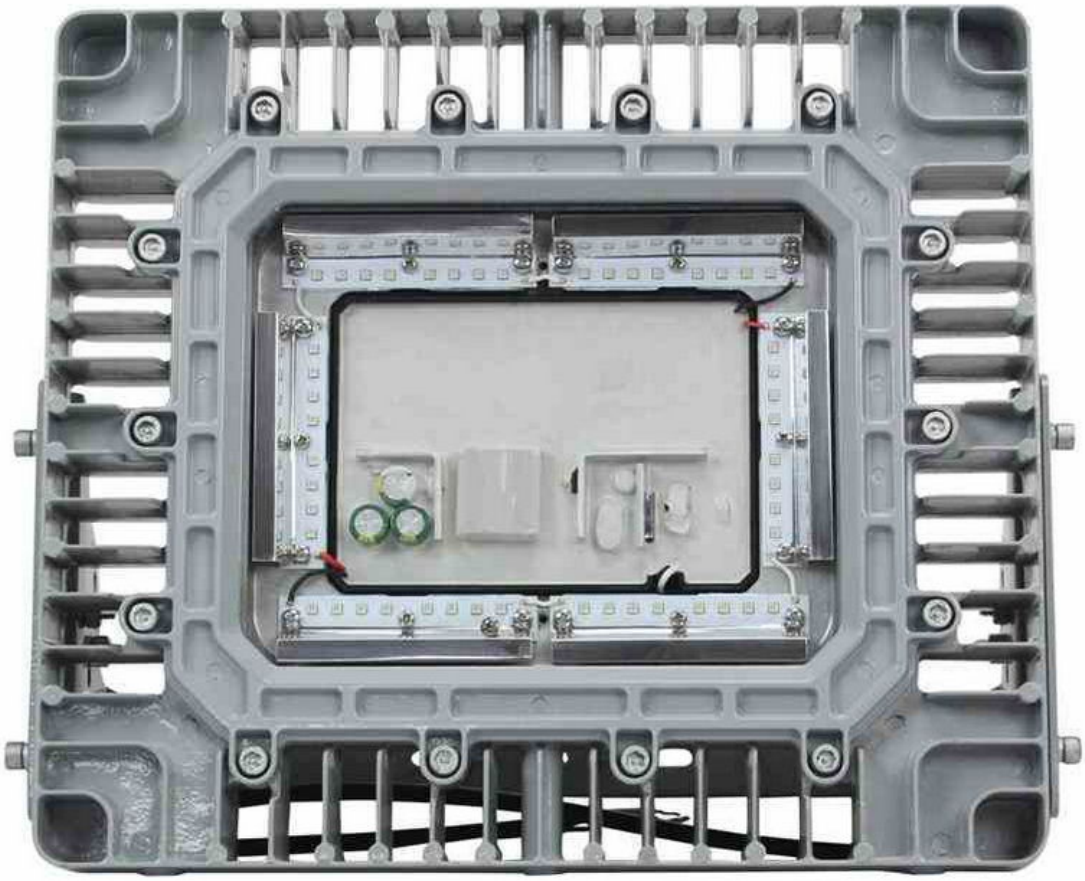







<- Back

Product Description

Title: ELECTRIC LIGHTING FIXTURES FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EP-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Lighting Fixtures for Use in Hazardous (Classified) Locations (UL-844) and are identified with the ETL Listed Mark.

Contact Us
Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center
Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News
Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

<- Back

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

<- Back

Product Description

Title:	LUMINAIRES
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (UL-1598) and are identified with the ETL Listed Mark.

<- Back

Contact Us
Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center
Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News
Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



<- Back

Product Description

Title:	ELECTRIC LUMINAIRES FOR USE IN HAZARDOUS LOCATIONS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EP-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Luminaries for Use in Hazardous Locations (CAN/CSA-C22.2 No. 137) and are identified with the cETL Listed Mark.

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

<- Back

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



<- Back

Product Description

Title:	LUMINAIRES
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.

<- Back

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Frequently Asked Questions (FAQ)