

EPP-20A-3FT-1P

Explosion Proof Fixture/Extension Cord Plug - 20 Amp Rated - 3ft Pigtail

Product ID: 144479



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPP-20A Explosion Proof Plug

Amp Rating: 20

Dimensions: 2.78"-L 1.75"-W

Configuration: 3 Pole 2 Wire

Suitable Cable Diameter: .538" to .639"

Wiring: 3ft Pigtail - 12/3 SOOW Cord

Comparability: [EPO-20A Receptacle](#)- Crouse Hind™ ENR Receptacles

Cross Interchangeability: Crouse Hind™ ENP5201 and Hubble Killark UGP-20231-UGP-20232 ACCEPTOR® plugs

Certifications - Compliance

Class 1, Div 1 & 2 Groups B,C,D

Class 2 Div 1 & 2 Group G

Class III

CSA Type 7BCD, 9G

Special Orders- Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364


E-mail: sales@larsonelectronics.com

Larson Electronics EPP-20A-3FT-1P Explosion Proof Plug

The EPP-20A-3FT-1P explosion proof plug is rated at 20 amps and along with our with our EPP-20A series plug is compatible with our EPO-20A explosion proof 20 amp outlet. This plug can only be used in T style outlets and in order to retain explosion proof safety it must be mated to an explosion proof outlet. This plug is designed to lock into compatible receptacles by twisting the plug body until an audible click is heard, which indicates the plug is securely connected. Once locked into place this plug will not accidentally pull out. This plug is ideal for applications where moisture and corrosion is a problem and well suited for use in marine and manufacturing environments.

This watertight plug is rated for Class 1, Division 1 and 2 and Class 2, Division 1 and 2 and is suitable for use in areas where coal dust and petrochemical vapors

may be present. This explosion proof plug features non sparking aluminum construction, longer housing for easy handling, specially designed brass pins for secure full length pin contact and 15 amp current rating.




[Click Photo to Enlarge](#)

Inter-Compatibility: These plugs will fit non-explosion proof standard receptacles (NEMA 5-15R, 5-20R, or 6-20R). These plugs will work with Course Hind ENR Dead Front Interlocked receptacles. These plugs are cross-interchangeable with Crouse Hind™ ENP5201 and Hubble Killark UGP-20231-UGP-20232 ACCEPTOR® plugs.

Due to possible manufacturer changes we cannot guarantee interchangeability although we have made every effort to ensure cross compatibility correctness.

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Motor-Generator Sets, Compressors, Wet areas or Locations Where Petrochemical Vapors are Present.

8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						09-26-2023
EPP-20A-3FT-1P-125V 							
8	7	6	5	4	3	2	1

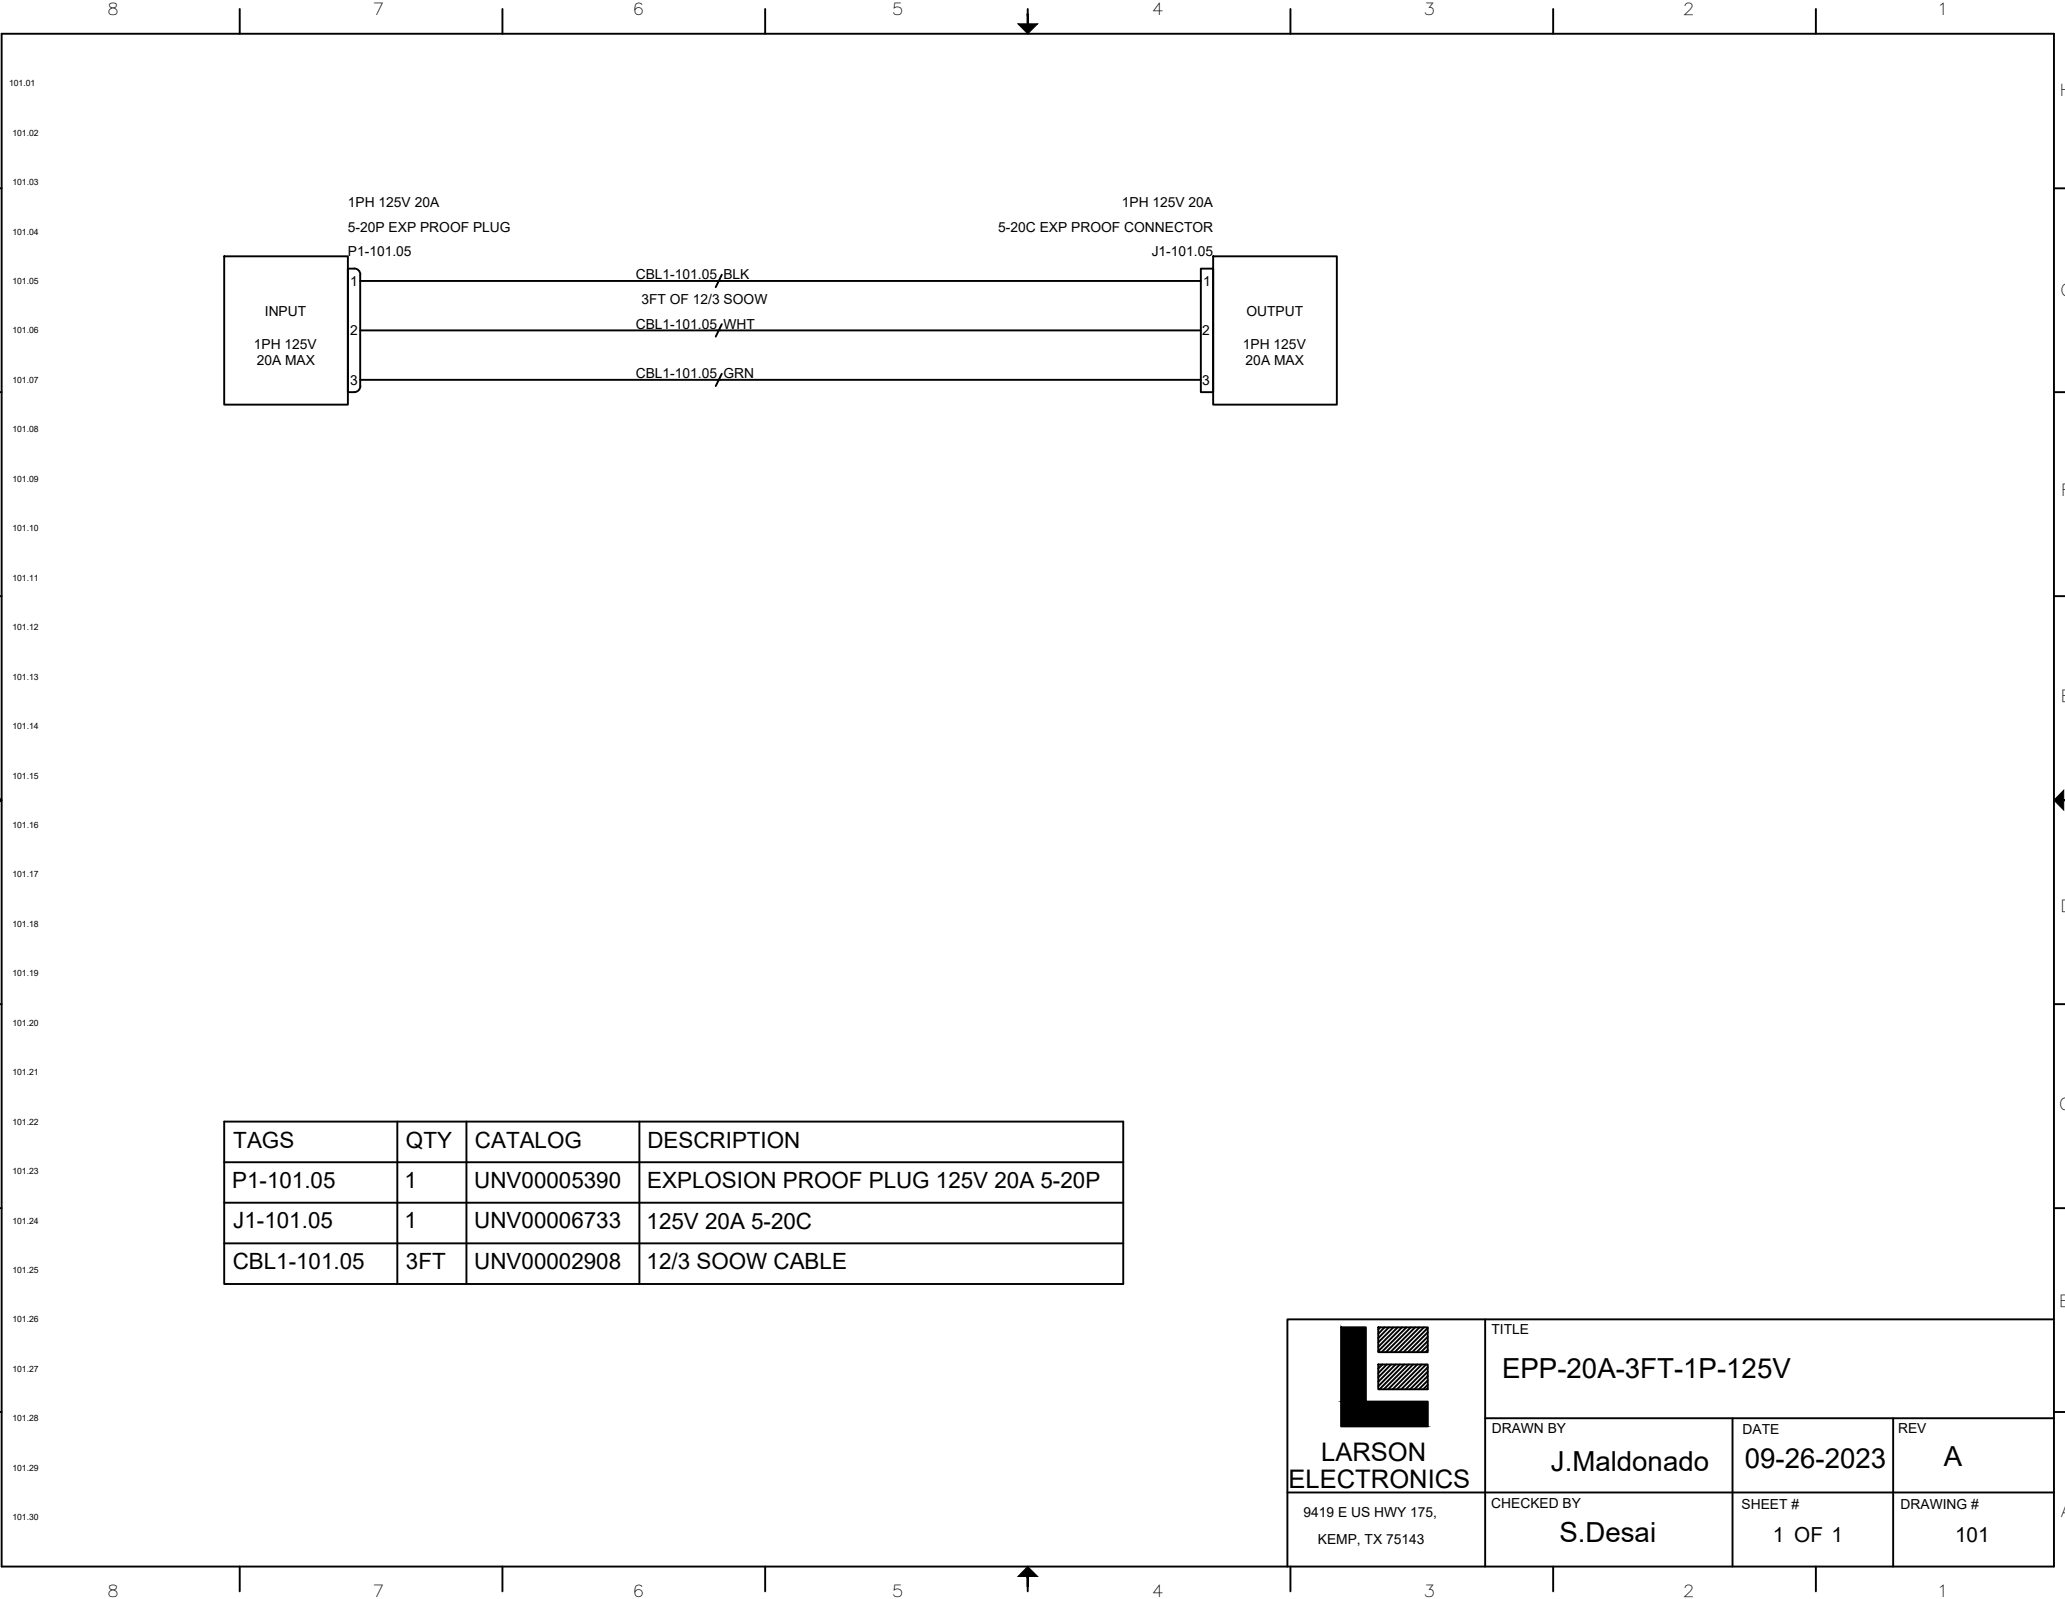

TAGS	QTY	CATALOG	DESCRIPTION
P1-101.05	1	UNV00005390	EXPLOSION PROOF PLUG 125V 20A 5-20P
J1-101.05	1	UNV00006733	125V 20A 5-20C
CBL1-101.05	3FT	UNV00002908	12/3 SOOW CABLE



**LARSON
ELECTRONICS**

9419 E US HWY 175,
KEMP, TX 75143

TITLE EPP-20A-3FT-1P-125V		
DRAWN BY J.Maldonado	DATE 09-26-2023	REV A
CHECKED BY S.Desai	SHEET # 1 OF 1	DRAWING # 101







Frequently Asked Questions (FAQ)