Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EPLC2-LED-100W-RT-480V

100 Watt Explosion Proof LED Flood Light - Surface Mount - 11,667 Lumens - C1D2 / C2D1 - 347-480V AC

Product ID: 145945



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPLC2-LED-100W-RT-480V Explosion Proof LED Flood Light

Listing: United States - Canada
Lamp Type: LED
Dimensions: 14"H x 16"W 5"D
Weight: 28lbs
Voltage: 480V AC
Total Watts: 100W
Total Lumens: 11,667
Luminous Efficiency: 116.67 Lm/W
Lamp Life: 60,000+ Hours
Color Temp: 6000K, 70-CRI.
Color Rendering Index: >75 CRI
Beam Angle: 60° or 125°
Lighting Configuration: Flood Pattern
Power Efficiency: >95%
Power Factor: 0.992
Amperage: 0.29A @ 347V, 0.21 @ 480V
Ambient Operating Temp Range:-50°C to +65°C
Operating Temp Rating: T5
Housing Material: Copper Free Cast Aluminum
Lens Material: Hardened Borosilicate Glass
Gasket Material: Silicone
Mounting: Adjustable flat surface mount
Wiring: 10` 16/3 SOOW w/ Flying Leads
Wiring Hub: 3/4" NPT
Temp Rating: T5 -50°C to +85°C

Ratings

Listed for United States and Canada
Class I, Divisions 2, Groups C and D
Class II, Divisions 1 & 2, Groups E,F,G
Class III, Divisions 1 & 2
cETL Certified to UL844 and C22.2 Standards
Certified to UL 844 Ed. 13
Certified to UL 1598
Certified to C22.2 No. 137 Rev 2009
Certified to C22.2 No. 250.0
T5 Temperature Rating
Paint Spray Booth Approved
IEC 60529 Tested
IP67 Rated Waterproof
LEL Approved
Multiple Driver Banks
80% Lumen Retention after 60,000 Hours
Factory Sealed Light Fixture

Special Orders - Special Requirements


Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

The Larson Electronics EPLC2-LED-100W-RT-480V Explosion Proof LED Flood Light provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries. LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older fixtures.
This Class I Division 2 and Class II Divisions 1 & 2 explosion proof LED flood light fixture provides 11,667 lumens of high quality light while drawing only 100 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.



Click Photo to Enlarge



Click Photo to Enlarge

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains eight individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.
LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.
LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.
This light is universal voltage capable and can be operated with 347-480 VAC without modifications. 347V is common in Western Canada, while 480V is common in the United States and Eastern Canada. This explosion proof LED light fixture is IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.


The aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LED luminaries. The LED lamp produces 11,667 lumens with a color temperature of 6000K and a color rendering index of 70 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries. The EPLC2-LED-100W-RT-480V offers an adjustable mounting system that this fixture to be mounted to any flat surface including walls and ceilings.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

High Quality Features

1. Low power consumption.
2. Instant on/off operation.
3. Fixture constructed of extruded corrosion resistant copper free aluminum alloy.
4. Superior color rendering compared to HPS, LPS, MH.
5. Retains 80% lumen output after 60,000 operating hours.
6. Powder coated aluminum fixture body.
7. Pendant and Swivel Bracket mount included
8. Low profile - Light weight
9. 11,667 Lumen output from only 100 watts

Superior LED Benefits

1. 60,000 hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off - No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.

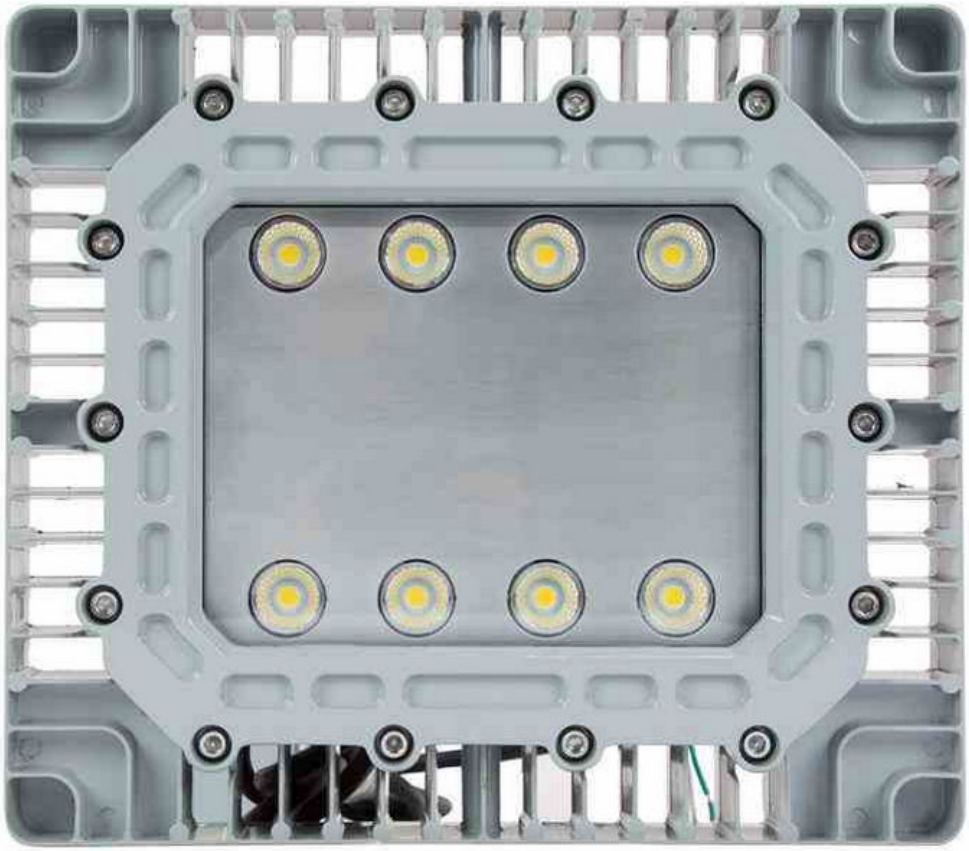







Frequently Asked Questions (FAQ)