Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1

112.5 KVA Distribution Skid, 480V-240D/120 3PH, (6) AR642 (4) L15-30R (12) 5-20R

Product ID: 150180



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1 -Temporary Power Distribution System

Line-in: 600A Terminal Lug NEMA Enclosure [480V]
Line-in Cord Cap: -
Primary Voltage (V): 480V AC Delta
Primary Phase (PH): 3-Phase (3PH)
Primary Frequency (HZ): 60 Hz (60-cycles)
Primary Panel: 480D 3PH 600A MCCB N3R
Primary Breaker: (1) 150A 3P MCCB [600V]; (6) 60A 3P MCCB [600V]
Primary Outlets: (6) AR642 UL 1682/1686 Pin & Sleeve [480V]
Primary Protection: MCCB Circuit Breaker
Transformer (KVA): 112.5KVA 480V to 240D/120V 3PH N3R
Secondary Voltage (V): 240V AC Delta
Secondary Phase (PH): 3-Phase (3PH)
Secondary Frequency (HZ): 60 Hz (60-cycles)
Secondary Panel: 240D/120V 3PH 200A MCCB N3R
Secondary Breakers: (4) 30A 3P MCB [250V]; (12) 20A 1P MCB [125V]
Secondary Outlets: (4) L15-30R NEMA Twist-Lock [250V]; (12) 5-20R NEMA GFCI DPLX [125V]
Secondary Protection: MCCB Circuit Breaker; MCB Circuit Breakers; GFCI's
Form Factor: Blue Powder Coated Steel Closed Cube w/Casters
Doors: (2)
Frame Material: Steel
Frame Finish: High-strength TGIC Polyester Powder Coated Blue
Cart Handle Orientation: Horizontal
Lifting Eyelet: (4) Top Located
Skid Pockets: (2) Bottom Located

Ratings

Max Primary OCP: 600A @ 480V
Max Secondary Output: 200A @ 240V
NEMA 3R Indoor or Outdoor Use
Made in the USA
NRTL Certified to UL 1640
NRTL Certified to CSA C22.2 No. 14

Powder Coat Finish Standards:

Complies with ASTM D-523
Complies with ASTM D-3359
Complies with ASTM D-522
Complies with ASTM D-3363
Complies with ASTM D-2794

Special Orders- Requirements

Contact us for special requirements

Phone: 1-214-616-6180

Casters: (4) Locking Casters

Dimensions: 88.4"-L X 33.5"-W X 73.7"-H

Weight: 3150 lbs

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in Texas

The Larson Electronics MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1 Power Distribution Substation converts three-phase 480V AC electrical current to three-phase 240V AC. This fully enclosed power distribution unit provides operators the ability to safely tap into and distribute 480V AC power from a variety of sources including generators and direct grid power.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

The MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1 temporary power distribution system gives operators the ability to power their 240 volt equipment from a single system.

Operation:

- Primary Voltage: 3-phase 480V AC, Delta
- Primary Receptacles: (6) AR642 UL 1682/1686 Pin & Sleeve [480V]
- Transformer: 112.5KVA 480V to 240D/120V 3PH N3R
- Secondary Voltage: 3-phase 240V AC, Delta
- Secondary Receptacles: (4) L15-30R NEMA Twist-Lock [250V]; (12) 5-20R NEMA GFCI DPLX [125V]

*See specification table at the top of the page for more information about the power distribution system.

Protective Construction: This temporary power distribution unit is fully enclosed and is ruggedly constructed to withstand demanding conditions and industrial applications. The system is accessible via two doors at each end for access to breakers on the panels and a center-located door for access to receptacles. The model is equipped with bottom-located forklift skid pockets and four top-located lifting eyelets, which allows easy lifting with cable or chain hooks. Four locking casters at the base provides mobility around work sites.

The power distribution system is constructed of steel with a polyester powder coated blue finish for durability against dirt, moisture and mild corrosion. This special coating creates a high-strength barrier for protection from accidental bumps and scratches. The TGIC polyester powder coat finish offers reliable resistance against chemicals, UV light (sun light) and degrading elements in outdoor locations. Our powder coating solution ensures robust color retention for many years without fading. Custom colors, such as black, grey, desert tan or forest green, and galvanized finishes are available upon request. Non-standard powder coat colors or galvanized finishes may increase price and lead times.

The transformer and load center/distribution assembly is mounted to a standard steel cube style frame resulting in an extremely stable, durable and mobile power distribution platform. This temporary power distribution solution can be modified to meet the needs of job-site receptacle requirements. Larger units are available upon request and can be equipped with skids or trailer mounted.

Certification: All units are built in accordance to NFPA 70 (National Electric Code) and certified to UL 1640. All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.


Grounding: Transformer is grounded to the frame and we provide a grounding lug on the frame for the earth ground.

~Please check all motor loads for dual rated motors that will work 208 or 240.~

Applications: This power distribution system is ideal for indoor or outdoor use and applications including but not limited to, construction sites, plant maintenance, plant turnarounds, shows, exhibits, and shipyard operations. These

power distribution systems are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.

Custom Built Systems Available: Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

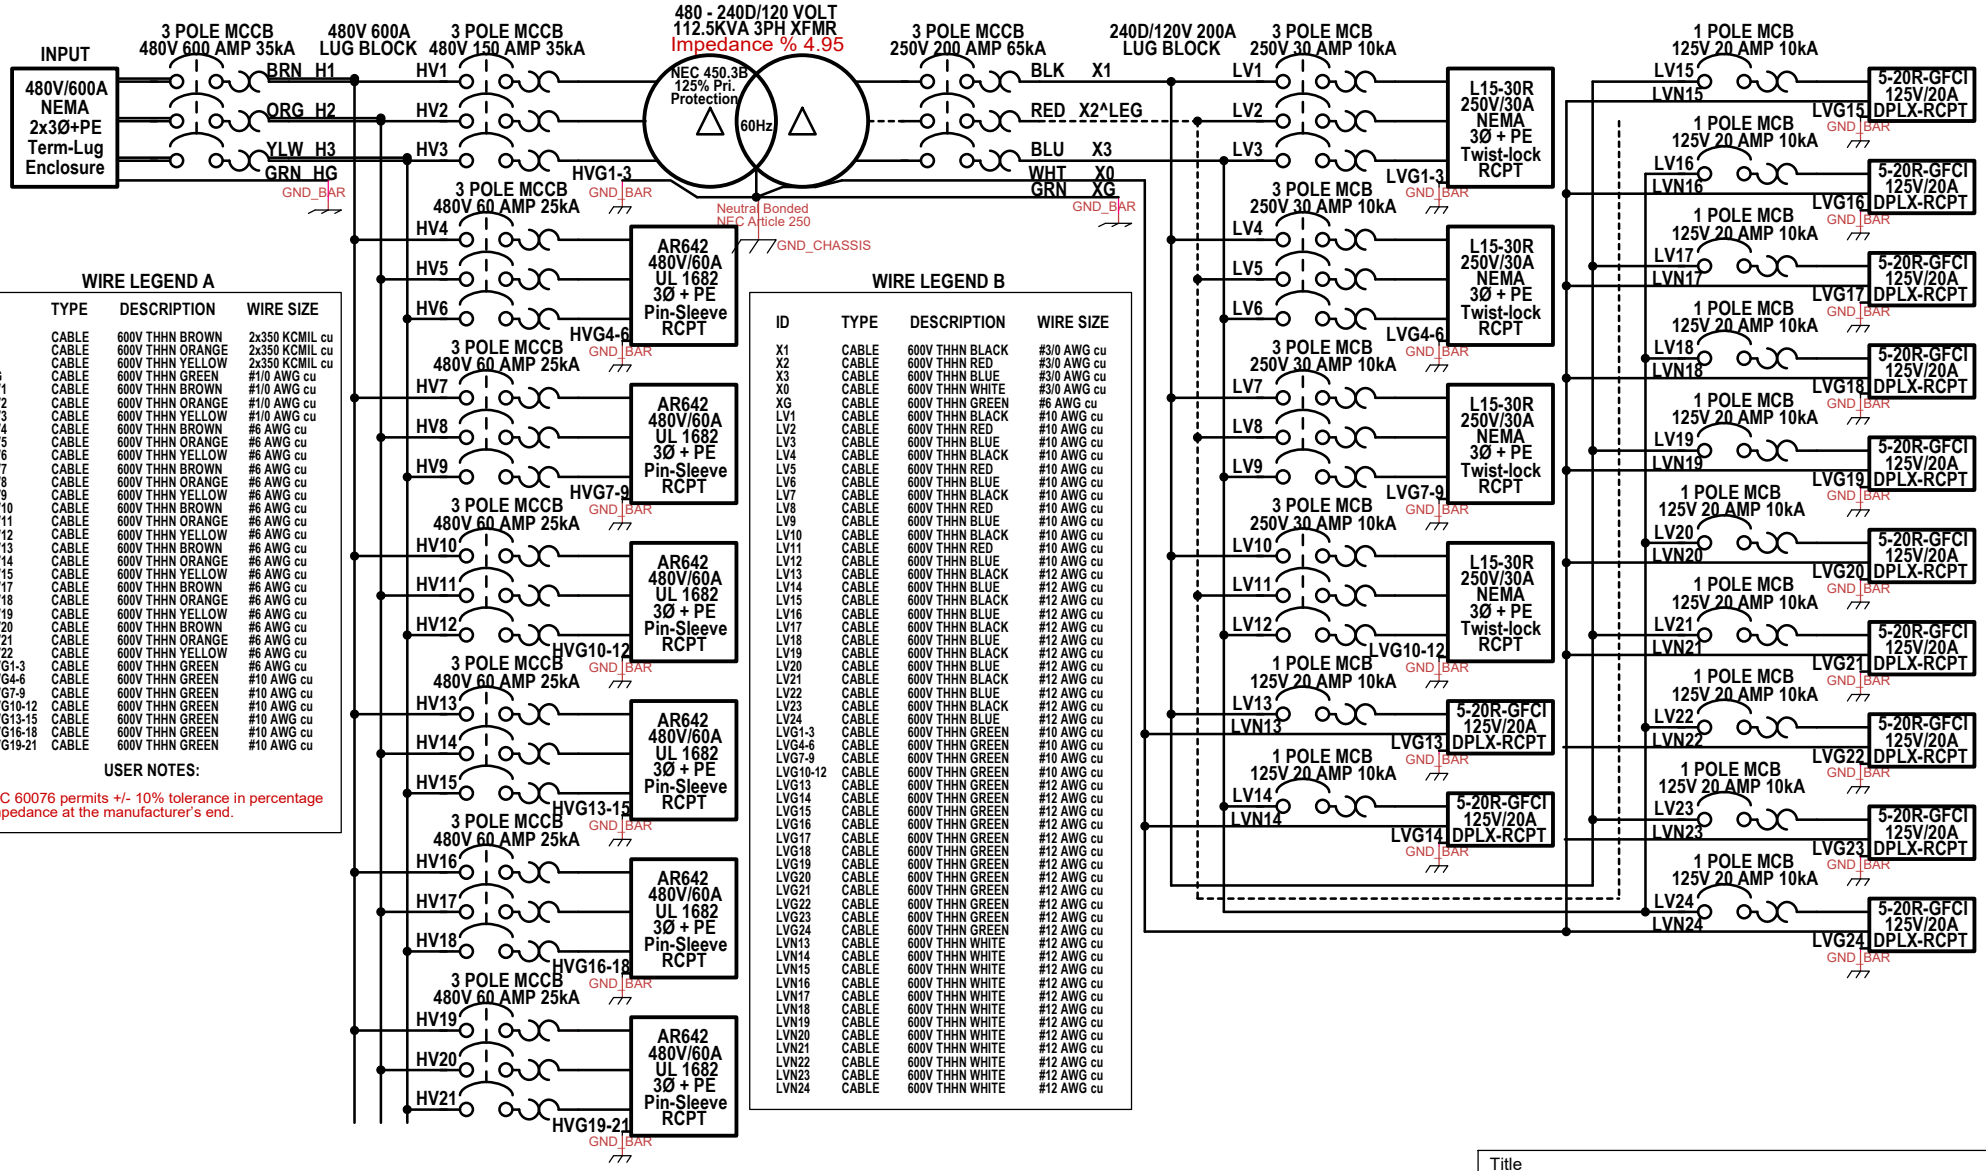

WIRE LEGEND A

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	2x350 KCMIL cu
H2	CABLE	600V THHN ORANGE	2x350 KCMIL cu
H3	CABLE	600V THHN YELLOW	2x350 KCMIL cu
HG	CABLE	600V THHN GREEN	#1/0 AWG cu
HV1	CABLE	600V THHN BROWN	#1/0 AWG cu
HV2	CABLE	600V THHN ORANGE	#1/0 AWG cu
HV3	CABLE	600V THHN YELLOW	#1/0 AWG cu
HV4	CABLE	600V THHN BROWN	#6 AWG cu
HV5	CABLE	600V THHN ORANGE	#6 AWG cu
HV6	CABLE	600V THHN YELLOW	#6 AWG cu
HV7	CABLE	600V THHN BROWN	#6 AWG cu
HV8	CABLE	600V THHN ORANGE	#6 AWG cu
HV9	CABLE	600V THHN YELLOW	#6 AWG cu
HV10	CABLE	600V THHN BROWN	#6 AWG cu
HV11	CABLE	600V THHN ORANGE	#6 AWG cu
HV12	CABLE	600V THHN YELLOW	#6 AWG cu
HV13	CABLE	600V THHN BROWN	#6 AWG cu
HV14	CABLE	600V THHN ORANGE	#6 AWG cu
HV15	CABLE	600V THHN YELLOW	#6 AWG cu
HV17	CABLE	600V THHN BROWN	#6 AWG cu
HV18	CABLE	600V THHN ORANGE	#6 AWG cu
HV19	CABLE	600V THHN YELLOW	#6 AWG cu
HV20	CABLE	600V THHN BROWN	#6 AWG cu
HV21	CABLE	600V THHN ORANGE	#6 AWG cu
HV22	CABLE	600V THHN YELLOW	#6 AWG cu
HVG1-3	CABLE	600V THHN GREEN	#6 AWG cu
HVG4-6	CABLE	600V THHN GREEN	#10 AWG cu
HVG7-9	CABLE	600V THHN GREEN	#10 AWG cu
HVG10-12	CABLE	600V THHN GREEN	#10 AWG cu
HVG13-15	CABLE	600V THHN GREEN	#10 AWG cu
HVG16-18	CABLE	600V THHN GREEN	#10 AWG cu
HVG19-21	CABLE	600V THHN GREEN	#10 AWG cu

USER NOTES:

IEC 60076 permits +/- 10% tolerance in percentage impedance at the manufacturer's end.

WIRE LEGEND B


ID	TYPE	DESCRIPTION	WIRE SIZE
X1	CABLE	600V THHN BLACK	#3/0 AWG cu
X2	CABLE	600V THHN RED	#3/0 AWG cu
X3	CABLE	600V THHN BLUE	#3/0 AWG cu
X0	CABLE	600V THHN WHITE	#3/0 AWG cu
XG	CABLE	600V THHN GREEN	#6 AWG cu
LV1	CABLE	600V THHN BLACK	#10 AWG cu
LV2	CABLE	600V THHN RED	#10 AWG cu
LV3	CABLE	600V THHN BLUE	#10 AWG cu
LV4	CABLE	600V THHN BLACK	#10 AWG cu
LV5	CABLE	600V THHN RED	#10 AWG cu
LV6	CABLE	600V THHN BLUE	#10 AWG cu
LV7	CABLE	600V THHN BLACK	#10 AWG cu
LV8	CABLE	600V THHN RED	#10 AWG cu
LV9	CABLE	600V THHN BLUE	#10 AWG cu
LV10	CABLE	600V THHN BLACK	#10 AWG cu
LV11	CABLE	600V THHN RED	#10 AWG cu
LV12	CABLE	600V THHN BLUE	#10 AWG cu
LV13	CABLE	600V THHN BLACK	#12 AWG cu
LV14	CABLE	600V THHN BLUE	#12 AWG cu
LV15	CABLE	600V THHN BLACK	#12 AWG cu
LV16	CABLE	600V THHN BLUE	#12 AWG cu
LV17	CABLE	600V THHN BLACK	#12 AWG cu
LV18	CABLE	600V THHN BLUE	#12 AWG cu
LV19	CABLE	600V THHN BLACK	#12 AWG cu
LV20	CABLE	600V THHN BLUE	#12 AWG cu
LV21	CABLE	600V THHN BLACK	#12 AWG cu
LV22	CABLE	600V THHN BLUE	#12 AWG cu
LV23	CABLE	600V THHN BLACK	#12 AWG cu
LV24	CABLE	600V THHN BLUE	#12 AWG cu
LVG1-3	CABLE	600V THHN GREEN	#10 AWG cu
LVG4-6	CABLE	600V THHN GREEN	#10 AWG cu
LVG7-9	CABLE	600V THHN GREEN	#10 AWG cu
LVG10-12	CABLE	600V THHN GREEN	#10 AWG cu
LVG13	CABLE	600V THHN GREEN	#12 AWG cu
LVG14	CABLE	600V THHN GREEN	#12 AWG cu
LVG15	CABLE	600V THHN GREEN	#12 AWG cu
LVG16	CABLE	600V THHN GREEN	#12 AWG cu
LVG17	CABLE	600V THHN GREEN	#12 AWG cu
LVG18	CABLE	600V THHN GREEN	#12 AWG cu
LVG19	CABLE	600V THHN GREEN	#12 AWG cu
LVG20	CABLE	600V THHN GREEN	#12 AWG cu
LVG21	CABLE	600V THHN GREEN	#12 AWG cu
LVG22	CABLE	600V THHN GREEN	#12 AWG cu
LVG23	CABLE	600V THHN GREEN	#12 AWG cu
LVG24	CABLE	600V THHN GREEN	#12 AWG cu
LVN13	CABLE	600V THHN WHITE	#12 AWG cu
LVN14	CABLE	600V THHN WHITE	#12 AWG cu
LVN15	CABLE	600V THHN WHITE	#12 AWG cu
LVN16	CABLE	600V THHN WHITE	#12 AWG cu
LVN17	CABLE	600V THHN WHITE	#12 AWG cu
LVN18	CABLE	600V THHN WHITE	#12 AWG cu
LVN19	CABLE	600V THHN WHITE	#12 AWG cu
LVN20	CABLE	600V THHN WHITE	#12 AWG cu
LVN21	CABLE	600V THHN WHITE	#12 AWG cu
LVN22	CABLE	600V THHN WHITE	#12 AWG cu
LVN23	CABLE	600V THHN WHITE	#12 AWG cu
LVN24	CABLE	600V THHN WHITE	#12 AWG cu

Title: MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1		
Author: David Downs		
File: 3PH 112.5KVA 240D-120V 200A 3PH MCB 6xAR		Document: RV22
Revision: 1.0	Date: 05/30/2017	Sheets: 1 of 1


REV	DESCRIPTION	DATE
A	PRODUCTION RELEASE	01-20-2023

MPD-CW3-TBX.600AB-DE112DP-XP-6.V04-4.L24-12.N10-M1

LARSON ELECTRONICS®

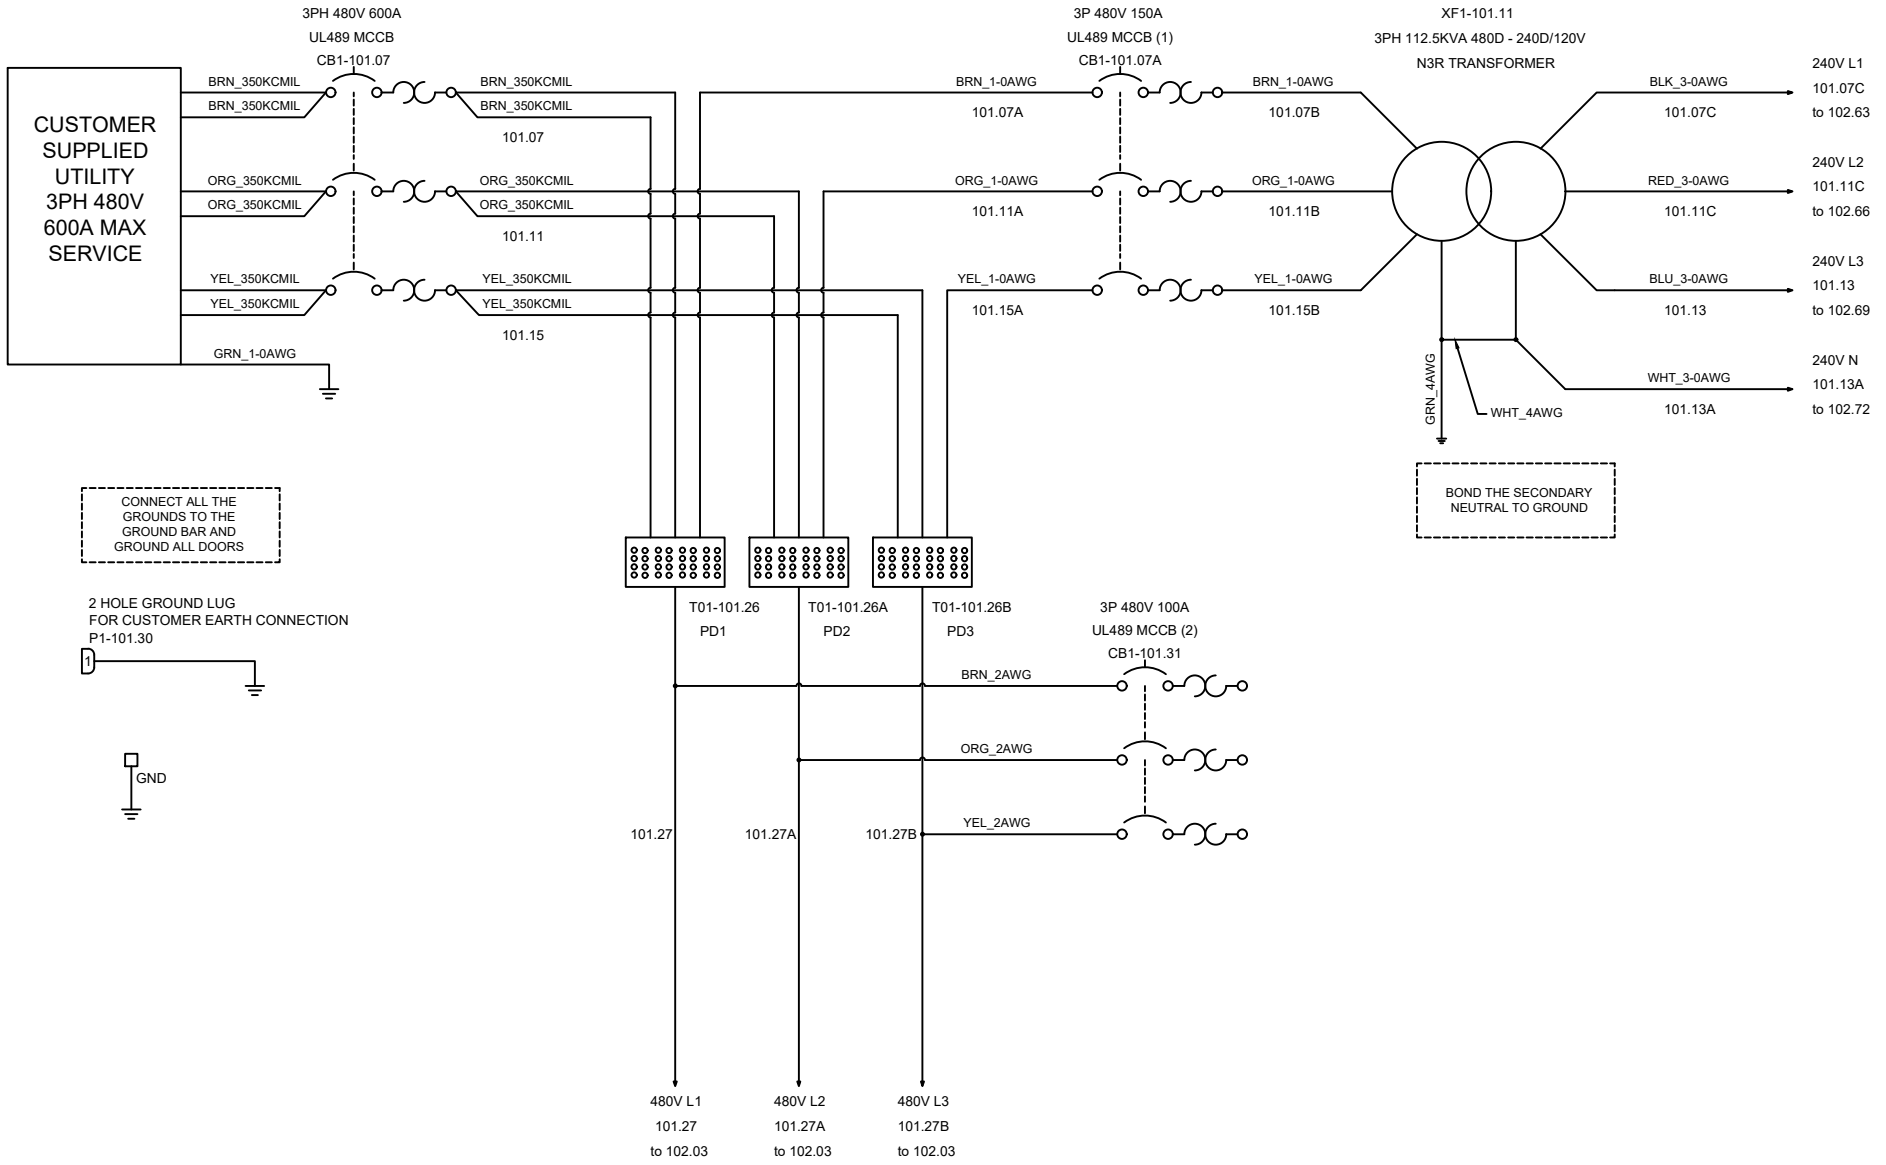


LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE: MPD-CW3-TBX.600AB-DE112DP-XP-6-V04-4-L24-12-N10-M1		
	DRAWN BY: J.Maldonado	DATE: 01-20-2023	REV: A
	CHECKED BY: S.Desai	SHEET #: 1 OF 5	DRAWING #: 101

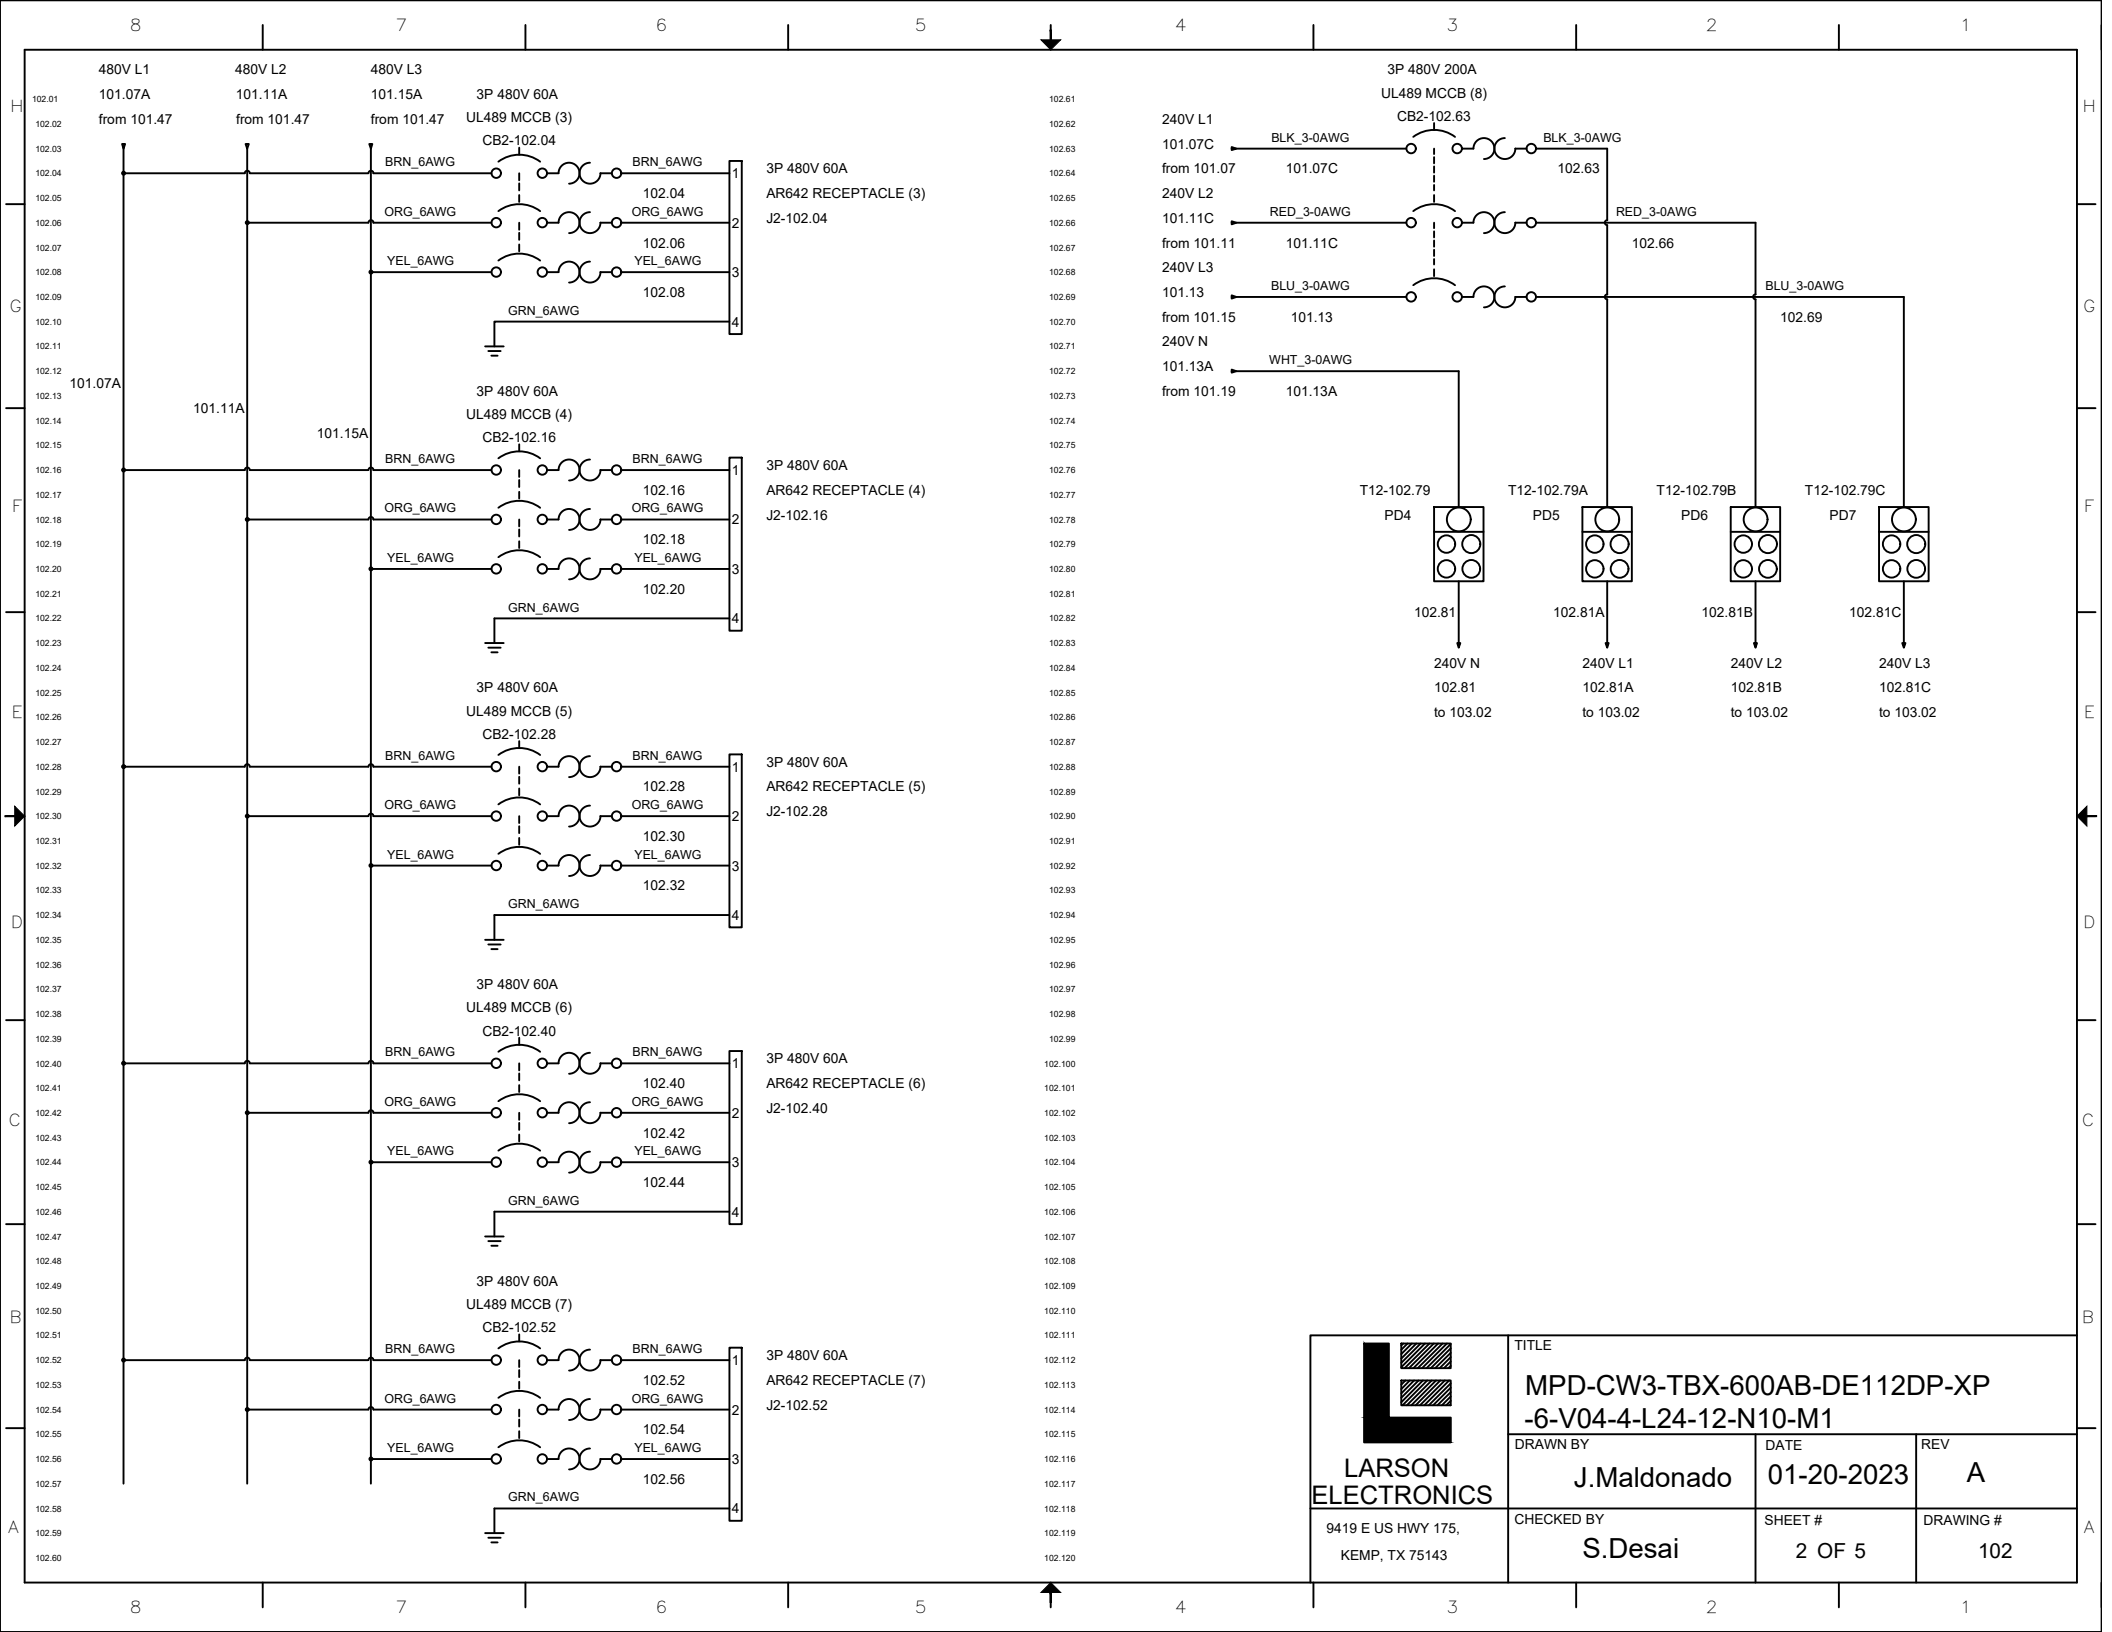


LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE			
MPD-CW3-TBX-600AB-DE112DP-XP-6-V04-4-L24-12-N10-M1			
DRAWN BY	J.Maldonado	DATE	01-20-2023	REV	A
CHECKED BY	S.Desai	SHEET #	2 OF 5	DRAWING #	102

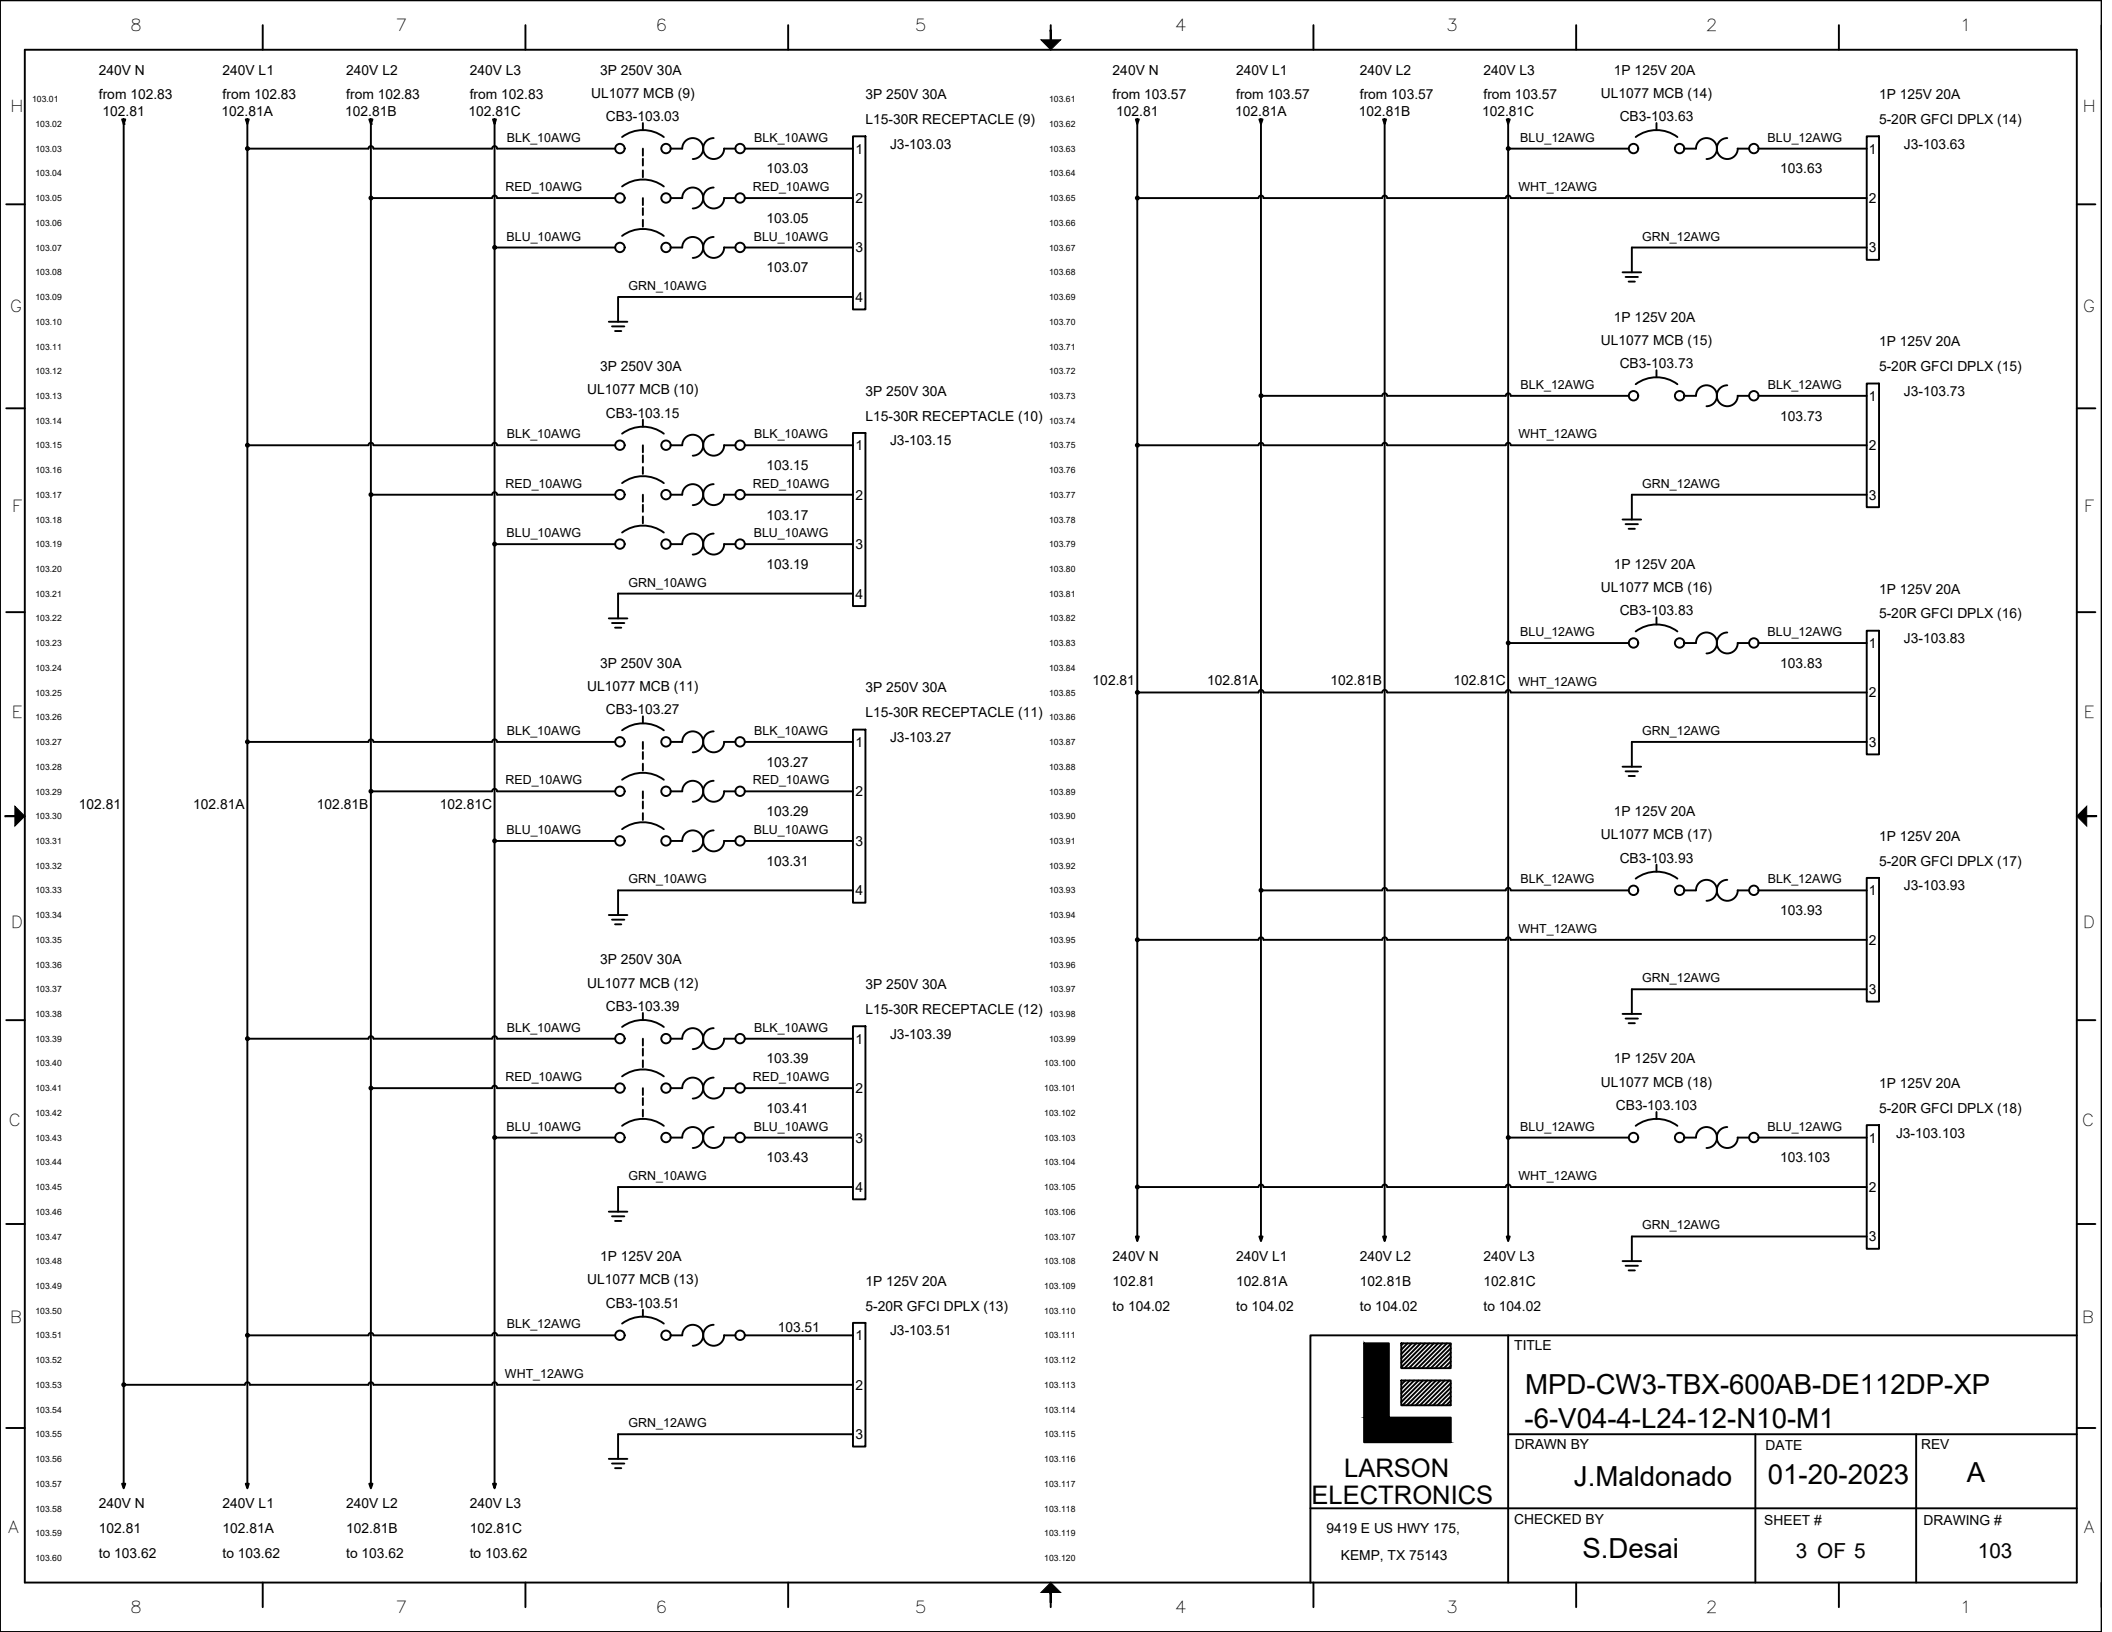
240V N
from 102.83
102.81
240V L1
from 102.83
102.81A
240V L2
from 102.83
102.81B
240V L3
from 102.83
102.81C
3P 250V 30A
UL1077 MCB (9)
CB3-103.03
3P 250V 30A
L15-30R RECEPTACLE (9)
J3-103.03
BLK_10AWG
RED_10AWG
BLU_10AWG
GRN_10AWG
103.03
103.05
103.07
3P 250V 30A
UL1077 MCB (10)
CB3-103.15
3P 250V 30A
L15-30R RECEPTACLE (10)
J3-103.15
103.15
103.17
103.19
3P 250V 30A
UL1077 MCB (11)
CB3-103.27
3P 250V 30A
L15-30R RECEPTACLE (11)
J3-103.27
103.27
103.29
103.31
3P 250V 30A
UL1077 MCB (12)
CB3-103.39
3P 250V 30A
L15-30R RECEPTACLE (12)
J3-103.39
103.39
103.41
103.43
1P 125V 20A
UL1077 MCB (13)
CB3-103.51
1P 125V 20A
5-20R GFCI DPLX (13)
J3-103.51
BLK_12AWG
WHT_12AWG
GRN_12AWG
103.51
240V N
102.81
to 103.62
240V L1
102.81A
to 103.62
240V L2
102.81B
to 103.62
240V L3
102.81C
to 103.62
240V N
from 103.57
102.81
240V L1
from 103.57
102.81A
240V L2
from 103.57
102.81B
240V L3
from 103.57
102.81C
1P 125V 20A
UL1077 MCB (14)
CB3-103.63
1P 125V 20A
5-20R GFCI DPLX (14)
J3-103.63
BLU_12AWG
WHT_12AWG
GRN_12AWG
103.63
1P 125V 20A
UL1077 MCB (15)
CB3-103.73
1P 125V 20A
5-20R GFCI DPLX (15)
J3-103.73
BLK_12AWG
WHT_12AWG
GRN_12AWG
103.73
1P 125V 20A
UL1077 MCB (16)
CB3-103.83
1P 125V 20A
5-20R GFCI DPLX (16)
J3-103.83
BLU_12AWG
WHT_12AWG
GRN_12AWG
103.83
1P 125V 20A
UL1077 MCB (17)
CB3-103.93
1P 125V 20A
5-20R GFCI DPLX (17)
J3-103.93
BLK_12AWG
WHT_12AWG
GRN_12AWG
103.93
1P 125V 20A
UL1077 MCB (18)
CB3-103.103
1P 125V 20A
5-20R GFCI DPLX (18)
J3-103.103
BLU_12AWG
WHT_12AWG
GRN_12AWG
103.103
240V N
102.81
to 104.02
240V L1
102.81A
to 104.02
240V L2
102.81B
to 104.02
240V L3
102.81C
to 104.02
LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143
TITLE
MPD-CW3-TBX-600AB-DE112DP-XP
-6-V04-4-L24-12-N10-M1
DRAWN BY
J.Maldonado
DATE
01-20-2023
REV
A
CHECKED BY
S.Desai
SHEET #
3 OF 5
DRAWING #
103

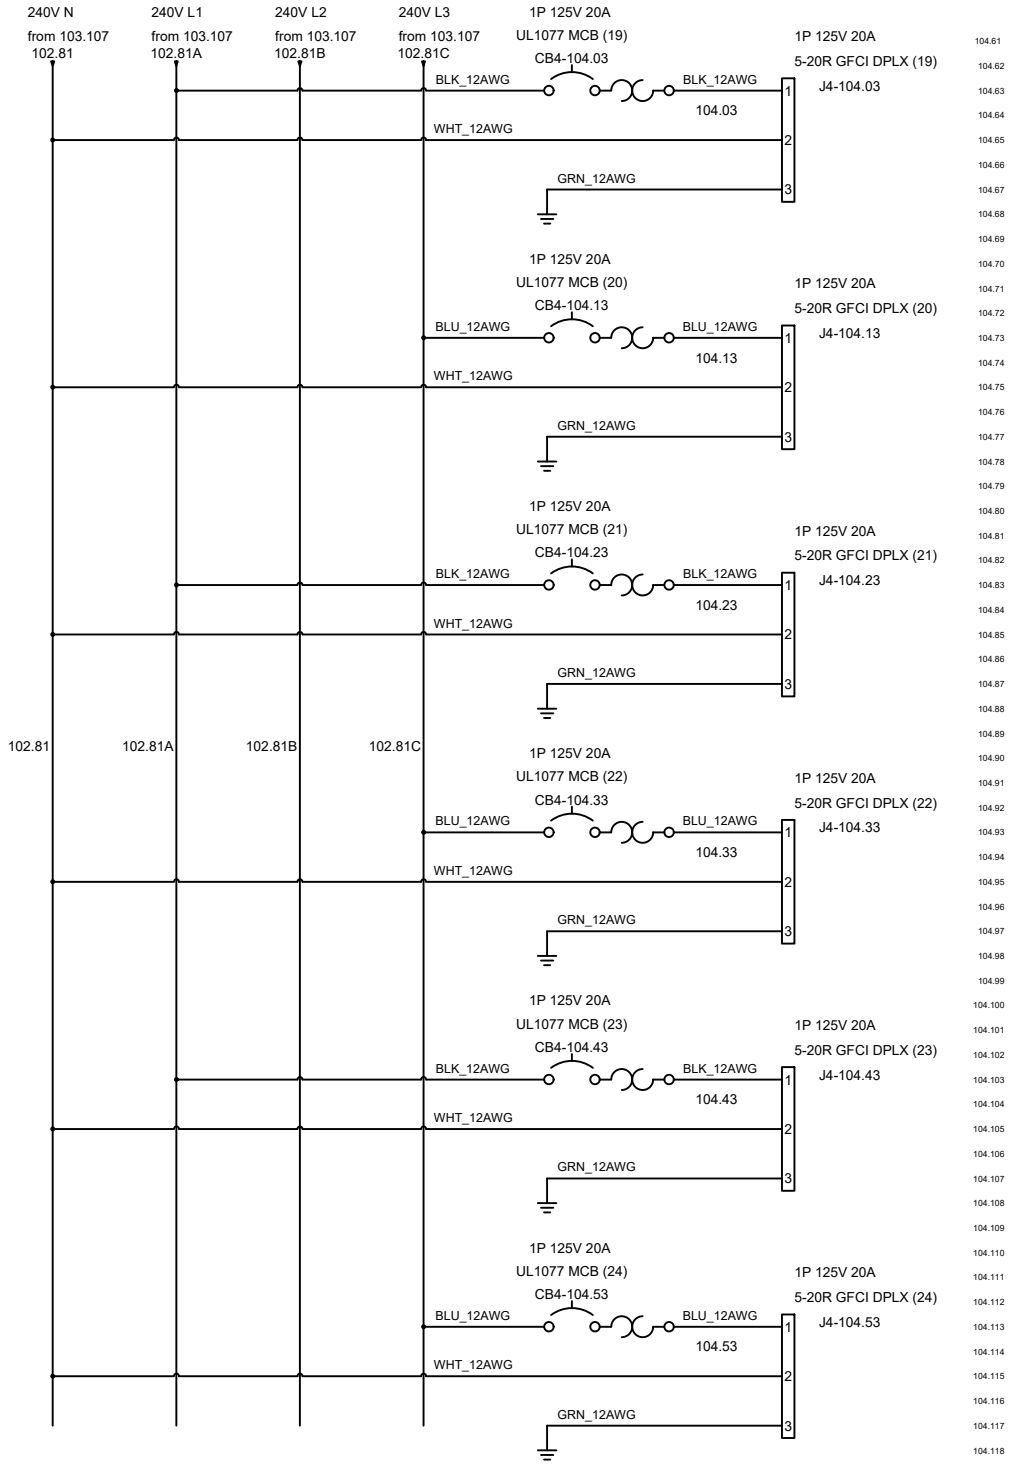

LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: MPD-CW3-TBX-600AB-DE112DP-XP-6-V04-4-L24-12-N10-M1			
DRAWN BY: J.Maldonado	DATE: 01-20-2023	REV: A	
CHECKED BY: S.Desai	SHEET #: 4 OF 5	DRAWING #: 104	

TAGS	QTY	CATALOG	DESCRIPTION
J2-102.04 J2-102.16 J2-102.28 J2-102.40 J2-102.52	5	UNV00008767	600V 60A Arktite AR Receptacle 3W4P
J3-103.103 J3-103.51 J3-103.63 J3-103.73 J3-103.83 J3-103.93 J4-104.03 J4-104.13 J4-104.23 J4-104.33 J4-104.43 J4-104.53	12	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
J3-103.03 J3-103.15 J3-103.27 J3-103.39	4	UNV00003762	3P 240V 30A L15-30R LOCKING RECEPTACLE
CB2-102.63	1	UNV00014726	3P 200A 240/480V MCCB UL489
CB2-102.04 CB2-102.16 CB2-102.28 CB2-102.40 CB2-102.52	5	UNV00014728	3P 480V 60A DIN RAIL MOUNT MCCB UL489
CB3-103.103 CB3-103.51 CB3-103.63 CB3-103.73 CB3-103.83 CB3-103.93 CB4-104.03 CB4-104.13 CB4-104.23 CB4-104.33 CB4-104.43 CB4-104.53	12	UNV00015144	1P 20A 120/240VAC DIN RAIL MOUNT BREAKER UL1077
CB1-101.07A	1	UNV00015185	3P 150A 240/480V MCCB UL489
CB1-101.07	1	UNV00016825	3P 480V 600A MCCB UL489
CB3-103.03 CB3-103.15 CB3-103.27 CB3-103.39	4	UNV00014729	3P 30A 480V DIN RAIL MOUNT CIRCUIT BREAKER UL1077
CB1-101.31	1	UNV00014727	3P 100A 240/480VAC MCCB UL489
T01-101.26 T01-101.26A T01-101.26B	3	UNV00014768	22 HOLE 10IN BUS BAR
T12-102.79 T12-102.79A T12-102.79B T12-102.79C	4	UNV00015085	POWER DISRIBUTION BLOCK 2-12 OPENING 570A
P1-101.30	1	UNV00007136	2 CONDUCTOR GND LUG
GND	1	UNV00013942C	GROUND BAR KIT
XF1-101.11	1	UNV00002916	3PH 112.5KVA 480D - 240D/120V N3R TRANSFORMER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-CW3-TBX-600AB-DE112DP-XP
-6-V04-4-L24-12-N10-M1

DRAWN BY	DATE	REV
J.Maldonado	01-20-2023	A
CHECKED BY	SHEET #	DRAWING #
S.Desai	5 OF 5	105


WARNING
CAUTION
ON | OFF
CAUTION
HIGH VOLTAGE


CAUTION
HIGH VOLTAGE


CAUTION
HIGH VOLTAGE



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards
ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

<- Back

Product Description

Title:	STAGE & STUDIO PORTABLE WIRING COMPARTMENTS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

<- Back

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

intertek
Total Quality. Assured.



<- Back

Product Description

Title:	INDUSTRIAL CONTROL EQUIPMENT
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Industrial Control Panels For General Use. Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

<- Back

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478 (or +1-847-660-7407)
Email
etldirectory@intertek.com

Intertek Home
Product Directories
DLP on mobile devices

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Frequently Asked Questions (FAQ)