

EXP-RT-DPST-MIN.60

Explosion Proof Timer Switch - Class I, II, III - 60-Minute Timer, DPST Switch - NEMA - 120-277V AC

Product ID: 150985



Image: EXP-RT-DPST-MIN.60

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXP-RT-DPST-MIN.60 Explosion Proof Timer Switch

Listing: NRTL Listed for United States, Canada

Unit Type: Explosion Proof Timer Switch

Dimensions: 5.1"-L x 3.625"-W x 6.663"-H

Minutes: Up to 60 Minutes

Configuration: DPST

Voltage: 120-277V AC 50/60 Hz

Timer Control: Mechanical Spring

Amperage: 20A @ 125V AC (7A for Tungsten loads), 10A @ 250 VAC, 10A @ 277V AC

Horsepower: 1HP @ 120V AC, 2HP @ 240V AC

Ambient Operating Temp: -40 °F to 104 °F (-40 °C to 40 °C)

Unit Materials: Copper-free Cast Aluminum

Mounting: External Mounting Lugs on Body

Hub Quantity: (2) Feed Through or (1) Dead End

Hub Size: 1/2" or 3/4"

Ratings/Approvals

Class I, Divisions 1&2 Groups C,D

Class II, Divisions 1&2 Groups E,F,G

Class III, Divisions 1&2

NEMA 3,7(BCD),9(EFG),12

No Power Input Required for Timer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

Made in Texas

The Larson Electronics EXP-RT-DPST-MIN.60 Explosion Proof Timer Switch provides timed controls for equipment in combustible work sites and locations. The timer can be configured using a DPST switch and allows for settings up to 60 minutes. Constructed of copper-free aluminum, this unit is NEMA-rated for durability in rugged environments.


The EXP-RT-DPST-MIN.60 offers robust timing control of equipment. This unit is equipped with a dual pole single throw switch, which allows operators to set the timer up to 60 minutes. Settings less than 60 minutes is possible. The device can also be reset back to zero any time during the countdown (example: after 10 minutes, reset back to zero). The explosion proof timer switch is designed for Class I, Division 1 and 2; Class II, Division 1 and 2; and Class III environments and operates on 120-277V AC 50/60 Hz; 20A @ 125V AC (7A for Tungsten loads), 10A @ 250V AC, 10A @ 277V AC. It uses 1HP @ 120V AC and 2HP @ 240V AC.

A mechanical spring controls the unit. Power input for the timer is not required. The EXP-RT-DPST-MIN.60 is constructed of copper-free cast aluminum for superior performance and durability. These switches are not factory sealed and require external sealing fittings. Two external mounting lugs provide simple and secure mounting of the unit to walls and flat surfaces. This explosion proof unit is available with either 1/2" or 3/4" NPT tapped hubs. The conduit openings are provided on the top and bottom of the unit in feed through versions, while dead-end versions have a single conduit hub, providing easy and secure connection to main power line supplies. Operating temperature is -40 °F to 104 °F (-40 °C to 40 °C).

Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present. This switch can be used with fans, motors, heaters, and lighting (including incandescent, halogen, compact fluorescent, tungsten, and LED lighting loads).

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						8-6-2020
EXP-RT-DPST-MIN.60-XX-XX 							
8	7	6	5	4	3	2	1

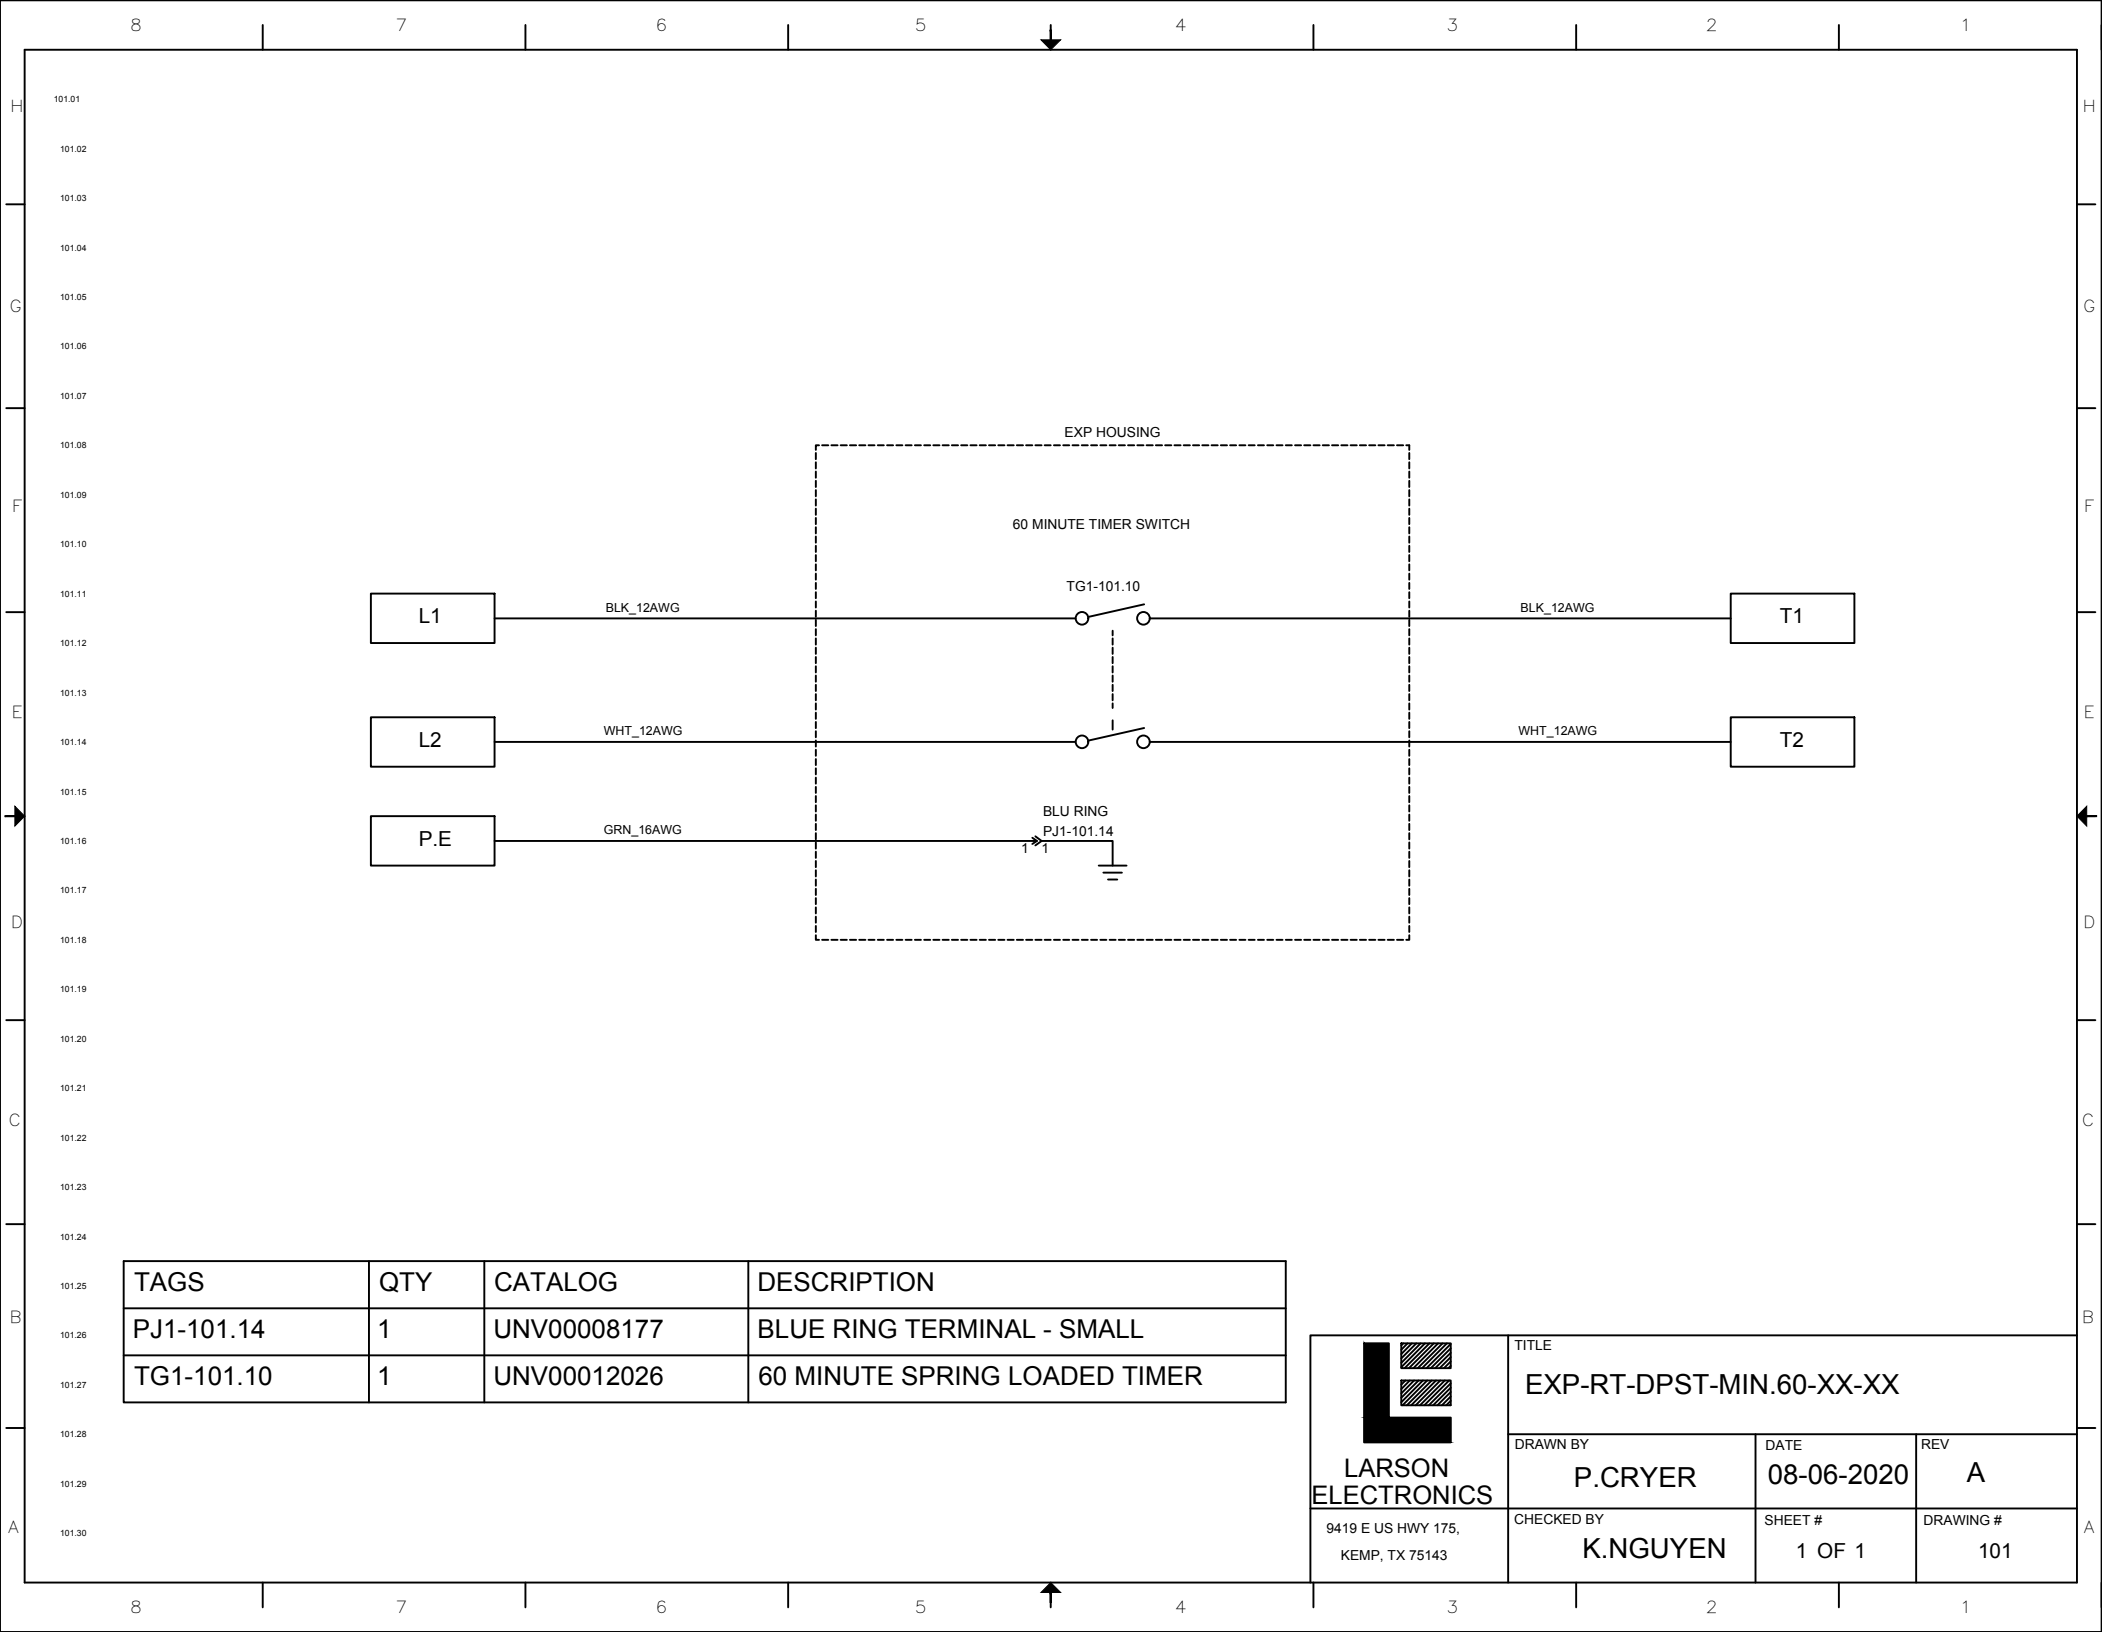

TAGS	QTY	CATALOG	DESCRIPTION
PJ1-101.14	1	UNV00008177	BLUE RING TERMINAL - SMALL
TG1-101.10	1	UNV00012026	60 MINUTE SPRING LOADED TIMER




**LARSON
ELECTRONICS**




9419 E US HWY 175,
KEMP, TX 75143

TITLE EXP-RT-DPST-MIN.60-XX-XX		
DRAWN BY P.CRYER	DATE 08-06-2020	REV A
CHECKED BY K.NGUYEN	SHEET # 1 OF 1	DRAWING # 101


3/4 NPS THRU



2X 5/16 Hardware
Clearance Hole

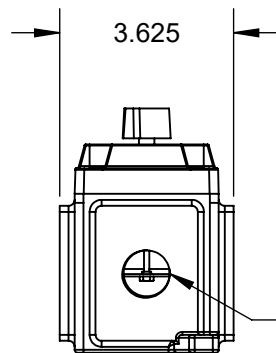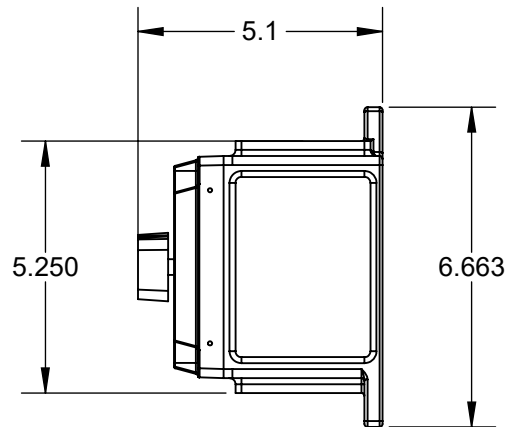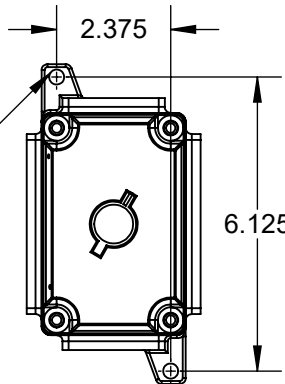

3/4 NPS THRU

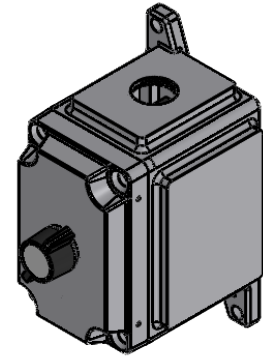

PART NUMBER:

**EXP-RT-DPST-
MIN.60-0.75IN-FT**

SIZE

A

REV

1

SCALE: NTS

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

UNLESS OTHERWISE
NOTED:

Angle +/- 1 deg
.X +/- .1
.XX +/- .05
.XXX +/- .005

DIMENSIONS ARE IN INCHES

DO NOT SCALE DRAWING

DATE

8/17/2021





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664





Frequently Asked Questions (FAQ)

There are no Faqs