Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

EPL-HB-100LED-RT-ASM-JB2-40C-BCE

100W Explosion Proof High Bay LED Light Fixture - 14000 Lumens - C1D1 - Paint Spray Booth Approved

Product ID: 154404



Image: EPL-HB-100LED-RT-ASM-JB2-40C-BCE

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-HB-100LED-RT-ASM-JB2-40C-BCE - C1D1 High Bay LED Light

Listing: United States - Canada
Lamp Type: Cree LED
Dimensions: 14"H x 16"W x 7.84"D
Weight: 32 lbs
Voltage: 100-277 Volts AC, 50/60Hz or 11-25 Volts AC/DC
Total Watts: 100W
Total Lumens: 14,000
Luminous Efficacy: 140 Lm/W
Lamp Life: 60,000+ Hours
Color Temp: 5600K, 4500K, 3000K
Color Rendering Index: >75 CRI
Beam Angle: 60° or 125°
Lighting Configuration: Flood Pattern
NEMA Type (Lighting): 6H x 6V (60° Optics); 6H x 6V (125° Optics); 6H x 7V (140° Optics)
IES Classification: Type I (60° Optics); Type VS (125° Optics); Type VS (140° Optics)
Longitudinal Classification: Very Short (60° Optics); Very Short (125° Optics); Short (140° Optics)
Cutoff Classification: Cutoff
CIE Type: Direct
BUG Rating: B4-U1-G0 (60° Optics); B4-U1-G1 (125° Optics); B3-U1-G2 (140° Optics)
Power Efficiency: >95%
Power Factor: 0.992
Ambient Operating Temp Range: -50°C to +65°C
Operating Temp Rating: T5

Ratings/Approvals

Listed for United States and Canada
Class I, Divisions 1 & 2, Groups C and D
Class II, Divisions 1 & 2, Groups E,F,G
Class III, Divisions 1 & 2
Certified to UL 844 Ed. 13
Certified to UL 1598
Certified to C22.2 No. 137 Rev 2009
Certified to C22.2 No. 250.0
Certified to C22.2 No. 30-M-1986 Rev 2012
T5 Temperature Rating
Paint Spray Booth Approved
IEC 60529 Tested
IP67 Rated Waterproof
LEL Approved
Multiple Driver Banks
80% Lumen Retention after 60,000 Hours
Factory Sealed Light Fixture
3.5kV Surge Protection (NTC Circuit)
Recommended 15` to 40` Mounting Height
5G Vibration Rating

Housing Material: Copper Free Cast Aluminum
Housing Finish: Epoxy Powder Coated - Grey
Lens Material: Hardened Borosilicate Glass
Gasket Material: Silicone
Mounting: Anti Shock Surface Mount - Ships w/ Fixture
Wiring: 40` 16/3 SOOW w/ Blunt Cut Ends
Wiring Hub: 3/4" NPT

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The EPL-HB-100LED-RT-ASM-JB2-40C-BCE from Larson Electronics is an Explosion Proof High Bay LED Light Fixture that provides operators with a powerful and energy efficient alternative to traditional hazardous location luminaries. Cree LED technology and compact design makes this lamp an excellent replacement upgrade option for bulky and high maintenance cost older incandescent, metal halide and high pressure sodium lights. This explosion proof light has an anti shock surface mount that can withstand 5Gs of force, ideal for heavy vibration applications.


This Class I Divisions 1 & 2 and Class II Divisions 1 & 2 explosion proof light fixture provides 14,000 lumens of high quality light while drawing only 150 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. A special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention. The lightweight design and low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.



Click Photo to Enlarge



Click Photo to Enlarge



Click Photo to Enlarge

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

LED Drivers: Even in LED fixtures, heat is the single largest factor in premature light failure and color shifting. As a result, many manufacturers reduce the output of their LEDs in order to reduce the amount of heat produced. Rather than lower light output or quality, Larson Electronics addresses this problem with the addition of electronic LED drivers. These internal drivers provide the ability to automatically monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. This not only reduces the energy dissipation, effectively lowering the operating temperature of the fixture, but also prevents AC over-voltage and short circuit loading making this fixture virtually maintenance free. Because the electronic drivers allow the EPL-HB-100LED-RT-ASM-JB2-40C-BCE to run at a cooler internal temperature and regulates the electrical current, energy efficiency and LED service hours are maximized while at the same time reducing operating costs and downtime incurred from the frequent servicing intervals required with other hotter running lights.

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. With the EPL-HB-100LED-RT-ASM-JB2-40C-BCE series of explosion proof lamps from Larson Electronics, each LED fixture contains six individual LED boards configured in a series of banks. Each bank contains two LED on a single board with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.

Click Photos to Enlarge



60° Beam Angle



125° Beam Angle



140° Beam Angle

Beam Angles: When used as a portable lighting solution, the varying beam angles are each individually ideal for several environments. The 60° beam provides the most intense beam of the three options. It is perfect for narrow, confined spaces and is ideally suited for tank cleaning purposes. It offers focused light to provide ample illumination to tight work spaces and other environments. The 125° beam offers a more diffused source of light that is also less intense in brightness. It is a great general area work light and performs well when used for outdoor illumination. The 140° beam offers a very wide lighting pattern and is ideal for situations where lighting distance is not a concern, but illumination of a wider area and even light distribution is. The 140° beam is great for situations that call for working in close proximity to lights such as in a paint booth.

This unit produces 14,000 lumens with a color temperature of 5600K standard and a color rendering index of 75 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries. We also offer both 3000K warm white and 4500K natural white color temperature options (longer lead times may apply for non-standard temperatures). This lamp uses Cree LED units that have been chosen for their high lumen per watt ratio and extreme

longevity. These Cree LEDs generate a robust 140 lumens per watt effective lumen output and have a 80% lumen retention at 60,000 hours, giving them better efficiency and operational life than traditional light sources.

Field Serviceability: This explosion proof LED light fixture is field serviceable. All major internal components can be purchased from Larson Electronics and installed by a licensed electrician with basic tools. With most explosion proof fixtures, the fixture must be returned to the manufacturer for repair work, which presents downtime and long turn around times for repair work. Larson Electronics addresses this issue with the EPL-HB-100LED-RT-ASM-JB2-40C-BCE series with field serviceability, allowing operators to perform service work without having to return the fixture to the manufacturer in the event of damage or failure.

Energy Consumption Comparison

	Metal Halide	LED
Wattage	250 watts	100 watts
Amp Draw @ 120V AC	2.38 amps	.83 amps
Amp Draw @ 220V AC	1.30 amps	0.45 amps
Amp Draw @ 240V AC	1.19 amps	0.42 amps
Amp Draw @ 277V AC	1.03 amps	0.36 amps
Amp Draw @ 12V DC	23.75 amps	8.3 amps
Amp Draw @ 24V DC	11.88 amps	4.17 amps
Lamp Life Expectancy	20,000 hours	50,000+ hours
Operation cost per year (12hs/day @ 12c/kWh)	$149.80	$52.56

Each LED light fixture has the potential to save ~$100.00+ per year in electricty alone, not including maintainence costs, operational downtime, reduced productivity, HVAC loads, or carbon footprint. When retrofitting an entire facility with 100s of light fixtures, the return on investment of LED over metal halide becomes evident.

Voltage: This explosion proof LED light is universal voltage capable and can be operated with 100-277V AC, 50/60 Hz without modifications to the fixture. A low voltage version of this LED fixture that operates on AC/DC voltages from 11-25 volts is also available. 18-48V AC/DC voltage models are available for network systems and marine vessels. We also offer an additional 347-480V high voltage, 125-250V DC, and 0-10V dimmable versions of this explosion proof LED light fixture.

Wiring/Plug: This explosion proof flood light is equipped with a serviceable wiring hub, and 40 feet of 16/3 chemical and abrasion resistant SOOW cord with blunt cut ends for operators to hardwire or terminate their own cord cap.

Mounting: The EPL-HB-100LED-RT-ASM-JB2-40C-BCE comes standard with an anti shock adjustable surface mounting bracket. Ceiling and wall applications are mounted using this included adjustable swivel mount bracket found on the rear of the unit. The anti shock mount unit holds up to heavy vibration and can withstand up to 5G of force, ideal for heavy vibration applications like locomotives, mining and cranes. Wiring is fed through rigid pipe to the junction box and tied in to the fixture`s lead wires, completing the electrical connection. Additional mounting types are


available for this model.

This explosion proof LED light fixture is paint spray booth listed, IP67 rated, dust-proof, and protected against high pressure jets and temporary submersion. The cast aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LEDs and electronics.

Suggested Applications: The EPL-HB-100LED-RT-ASM-JB2-40C-BCE is approved for use within environments where flammable or combustible gases, vapors, dusts, fibers, and flying exist or stand the potential to exist, and is ideal for a wide variety of high vibration applications.

Applications include but not limited to aircraft maintenance, alcohol processing, aerospace, chemical manufacturing, coke processing, cold storage, compressed natural gas (CNG) facilities, cranes, cryogenics, distilleries, food processing (with food grade gasketed polycarbonate lens: EPL-HB-150LED-RT-188), fuel storage, gas processing plants, grain processing, laboratories, liquefied natural gas (LNG) facilities, liquid propane gas (LPG), manufacturing, marine vessels, methane production, mining, offshore, oil drilling rigs, oil refineries, paint spray booths, paper processing, petrochemical, pharmaceuticals, power plants, production refineries, sand blast cabinets, sewage and septic tanks, shipyards, solvent and cleaning areas, storage facilities, tank farms, tankers, textile, washdown areas, waste treatment plants, and woodworking. Click here to read the NEC description for explosion proof and hazardous locations.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

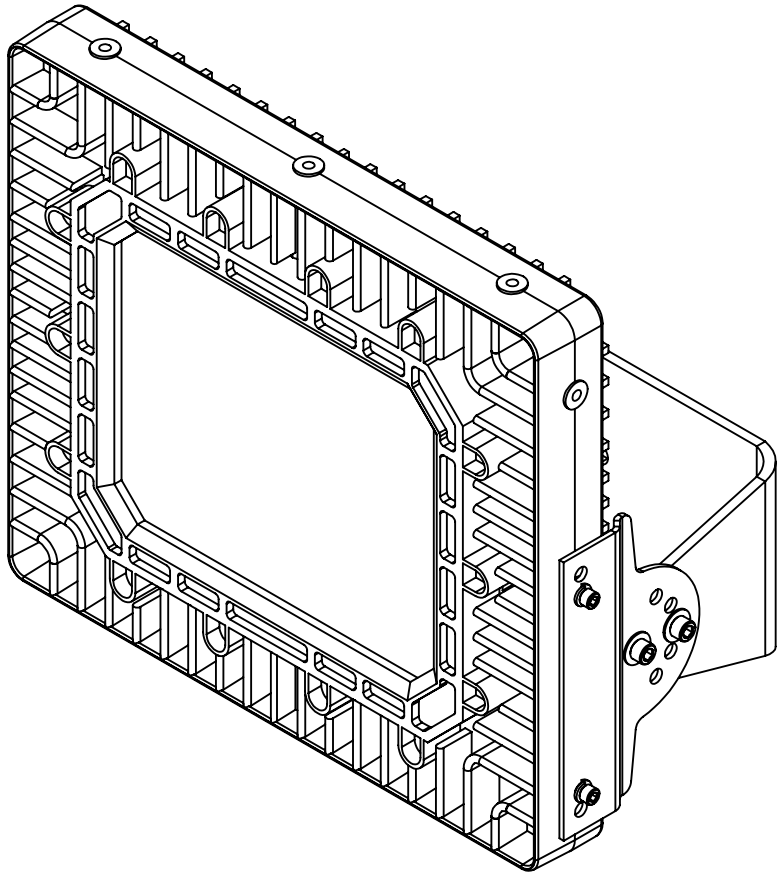

LARSON ELECTRONICS

TITLE:

EPL-HB-100LED-RT-ASM-JB2-40C-BCE


SIZE	DWG. NO.	REV
A		


DIMENSIONS ARE IN INCHES			SCALE: NTS	SHEET 1 OF 3
DO NOT SCALE DRAWING	DATE	09/10/2018		


PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

5 4 3 2 1

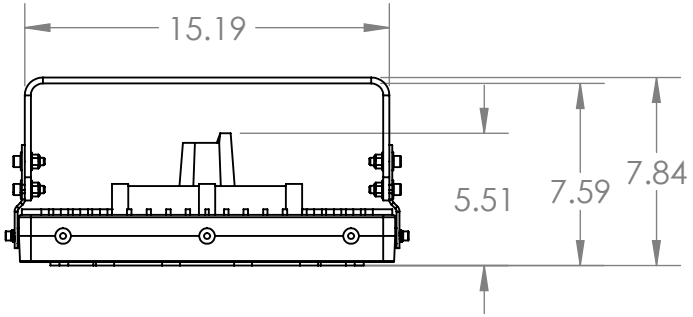

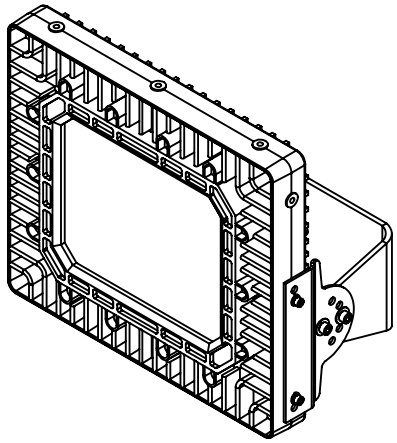

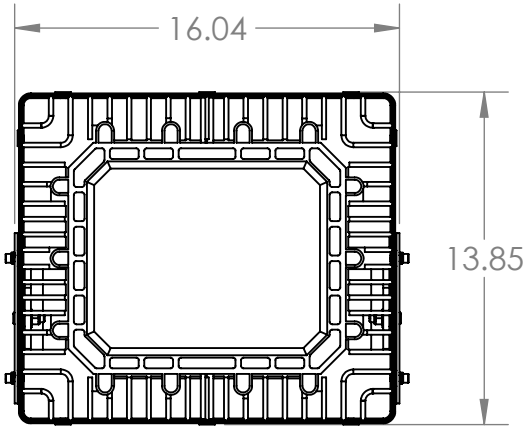

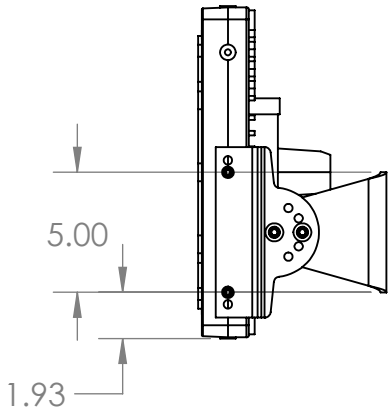

LARSON ELECTRONICS

TITLE:

EPL-HB-100LED-RT-ASM-JB2-40C-BCE


SIZE	DWG. NO.	REV
A		

DIMENSIONS ARE IN INCHES				
DO NOT SCALE DRAWING	DATE	09/10/2018	SCALE: NTS	SHEET 2 OF 3

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

5 4 3 2 1

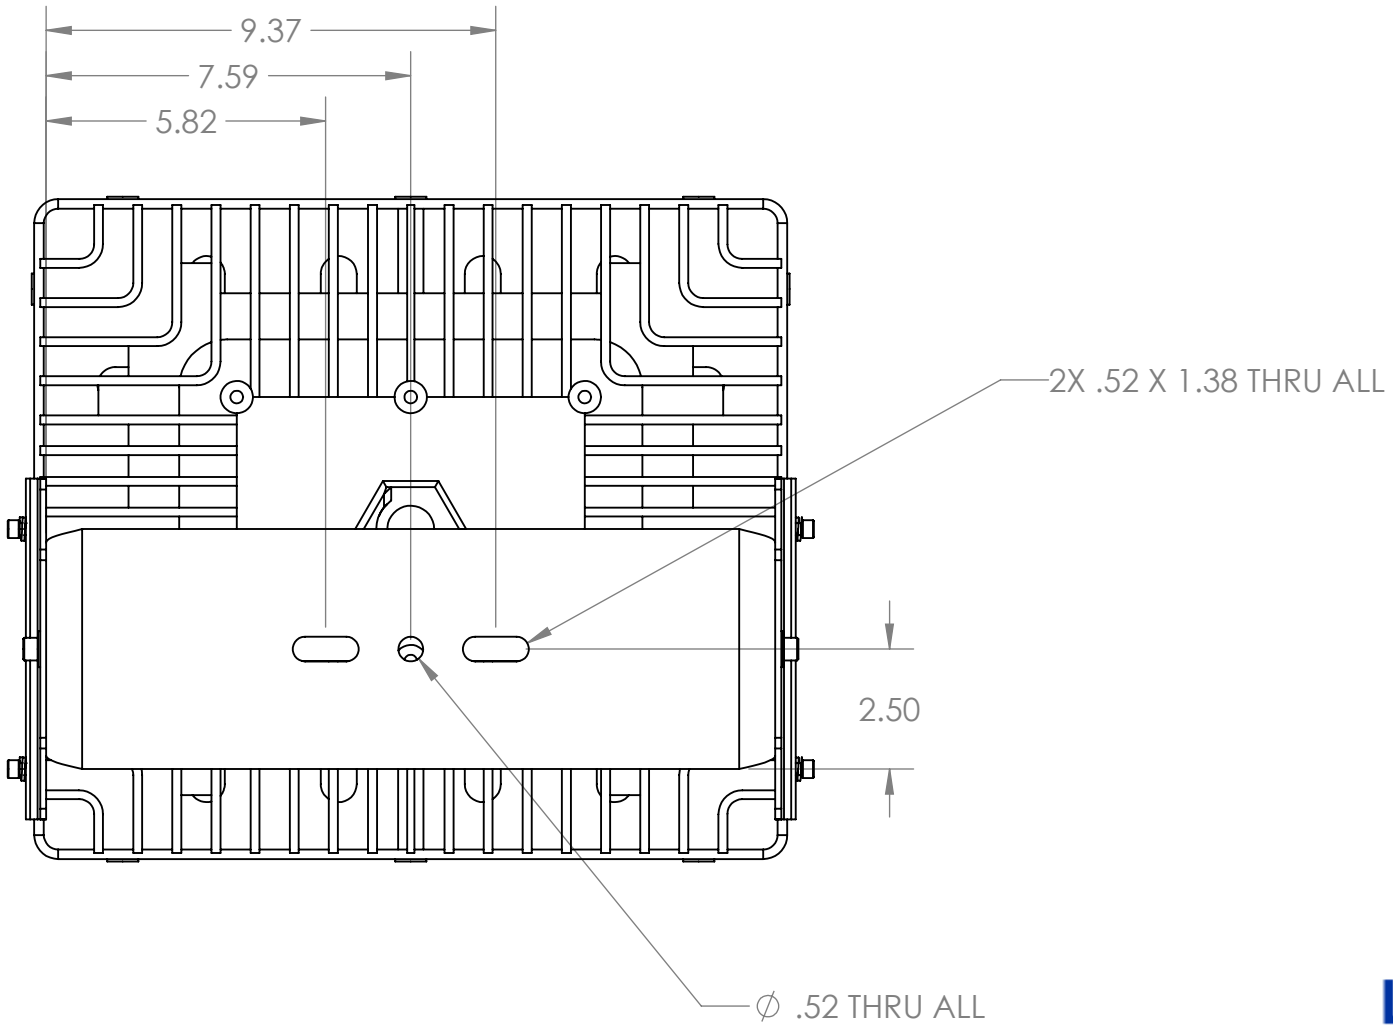

LARSON ELECTRONICS

TITLE:

EPL-HB-100LED-RT-ASM-JB2-40C-BCE

SIZE	DWG. NO.	REV
A		

DIMENSIONS ARE IN INCHES				
DO NOT SCALE DRAWING	DATE	09/10/2018	SCALE: NTS	SHEET 3 OF 3


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

5 4 3 2 1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

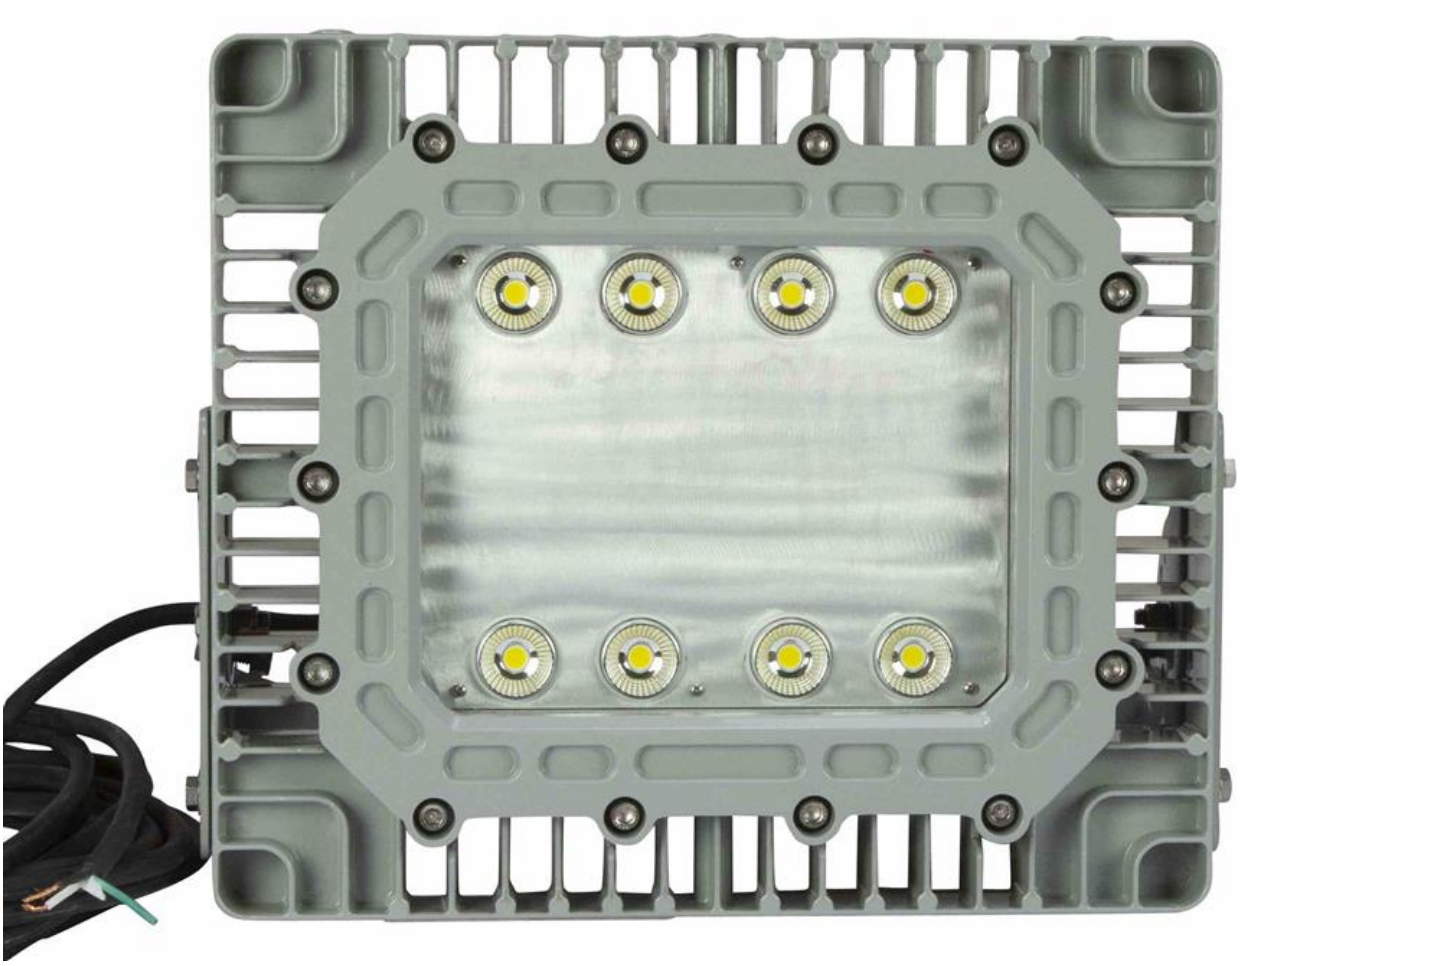

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



<- Back

Product Description

Title: ELECTRIC LIGHTING FIXTURES FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EP-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Lighting Fixtures for Use in Hazardous (Classified) Locations (UL-844) and are identified with the ETL Listed Mark.

Contact Us
Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center
Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News
Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

<- Back

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

<- Back

Product Description

Title:	LUMINAIRES
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (UL-1598) and are identified with the ETL Listed Mark.

<- Back

Contact Us
Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center
Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News
Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



<- Back

Product Description

Title:	ELECTRIC LUMINAIRES FOR USE IN HAZARDOUS LOCATIONS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EP-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Luminaries for Use in Hazardous Locations (CAN/CSA-C22.2 No. 137) and are identified with the cETL Listed Mark.

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

<- Back

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



<- Back

Product Description

Title:	LUMINAIRES
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Trade Name(s): Magna Light. LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, HAL-PRM-150W-LED. LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.

<- Back

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs