

MT-DOE16-FP-1P-208V-3KVA-480V-N3R

3 kVA Isolation Transformer - 208V Primary - 480V Secondary - NEMA 3R - Single Phase - Fully Potted / Encapsulated

Product ID: 221534



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-DOE16-FP-1P-208V-3KVA-480V-N3R Fully Potted Isolation Transformer

Phase: Single Phase
Frequency: 60 Hz
kVA: 3
Primary Voltage: 208 V
Taps: TBD
Secondary Voltage: 480 V
Winding Material: Aluminum
Insulation: 180°C
Temperature Rise: 135°C
Impedance (Std): -
Seismic: Yes
Sound Level: Meets NEMA ST-20 Standards
Primary Termination: -
Secondary Termination: -
Enclosure Material: NEMA Type 3R Heavy Duty - Resin Encapsulated
Finish: ANSI 61 Grey Finish
Dimensions: 11.75"H x 7.00"W x 6.5"D
Weight: 55 lb
Mounting: Wall Mount

Ratings

NRTL Listed for United States and Canada
ANN Cooling
IP14 Rated
Fully Potted / Encapsulated
Isolation Transformer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

The MT-DOE16-FP-1P-208V-3KVA-480V-N3R 208 V 1 Phase Energy Efficient Fully Potted Isolation Transformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable

for both indoor and outdoor applications, the MT-DOE16-FP-1P-208V-3KVA-480V-N3R provides increased reliability and protection against critical equipment failures. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

Transformer Features: With a transformer rating of 3 kVA, the MT-DOE16-FP-1P-208V-3KVA-480V-N3R isolation transformer is a single phase unit with a primary voltage of 208 V. It also provides a secondary voltage of 480 V. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This fully potted unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be wall mounted. The unit also features 180°C insulation with a 135°C temperature rise and is rated IP14.

Benefits: The MT-DOE16-FP-1P-208V-3KVA-480V-N3R isolation transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.

This fully potted isolation transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated wall brackets make installation fast and easy and the offset outward facing wall installation holes allow for easy power tool access.

Safety: The MT-DOE16-FP-1P-208V-3KVA-480V-N3R is an encapsulated isolation transformer which means that it provides operators with an increased level of protection against electric shock. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-DOE16-FP-1P-208V-3KVA-480V-N3R achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.


Applications: General purposes.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Wiring Diagram

WARNING: DO NOT SERVICE WHILE ENERGIZED!

MT-DOE16-FP-1P-208V-3KVA-480V-N3R

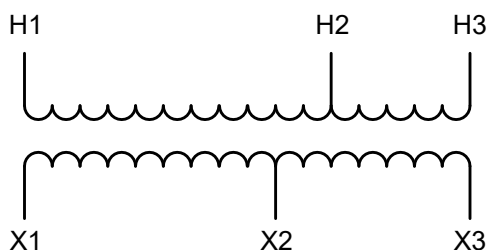


Primary Volts	Connect Lines To
277	X1-X3
208	X1-X2

Secondary Volts	Connect Lines To
480	H1-H3
277	H1-H2







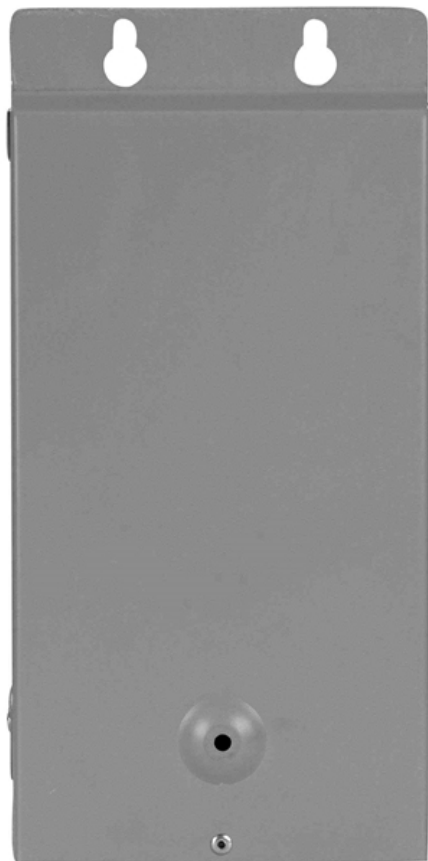



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MT-ATX, MT-BBT, MT-DIX, MT-DOE10, MT-DOE16, MT-ISX, and MT-PMD industrial line of transformers are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

Frequently Asked Questions (FAQ)