Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-DOE16-3P-240D-30KVA-460Y.265-N3R

30 kVA Isolation Transformer - 240V Delta Primary - 460Y/265 Wye-N Secondary - NEMA 3R - 60Hz

Product ID: 222179



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-DOE16-3P-240D-30KVA-460Y.265-N3R Distribution Transformer
Transformer Type: Distribution
Phase: Three Phase
Frequency: 60 Hz
Vector Group: DY11
kVA: 30
Primary Voltage: 240 V Delta
Taps: 2 x 2.5% FCAN; 4 x 2.5% FCBN
Secondary Voltage: 460Y/265 V Wye-N
Winding Material: Aluminum
Insulation: 220°C
Temperature Rise: 150°C
Impedance (Std): 3.5% - 6.5%
Seismic: Yes
Sound Level: Meets NEMA ST-20 Standards
Primary Termination: -
Secondary Termination: -
Enclosure Material: NEMA Type 3R Heavy Duty Ventilated
Finish: ANSI 61 Grey, UL50 Finish
Dimensions: 28.8"H x 25.8"W x 23.8"D
Weight: 310 lb
Mounting: Floor or Wall Mount

Ratings
Listed for United States and Canada
ANN Cooling
IP24 Rated
Distribution Transformer

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The MT-DOE16-3P-240D-30KVA-460Y.265-N3R 240 V Delta 3 Phase DY11 Energy Efficient Distribution Transformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-DOE16-3P-240D-30KVA-

460Y.265-N3R provides increased reliablity and protection against critical equipment failures. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 30 kVA, the MT-DOE16-3P-240D-30KVA-460Y.265-N3R distribution transformer is a three phase unit with a primary voltage of 240 V Delta. It also provides a secondary voltage of 460Y/265 V Wye-N. Featuring robust construction, this unit`s cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology. This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be floor or wall mounted. The unit also features 220°C insulation with a 150°C temperature rise and is rated IP24.

Benefits: The MT-DOE16-3P-240D-30KVA-460Y.265-N3R distribution transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.

This distribution transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated mounting brackets make installation fast and easy and the offset outward facing installation holes allow for easy power tool access.

Safety: The MT-DOE16-3P-240D-30KVA-460Y.265-N3R is a distribution transformer which means that it provides operators with an increased level of protection against electric shock. A distribution transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-DOE16-3P-240D-30KVA-460Y.265-N3R achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.


Applications: General purposes.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Wiring Diagram

WARNING: *DO NOT SERVICE WHILE ENERGIZED!*

MT-DOE16-3P-240D-30KVA-460Y.265-N3R

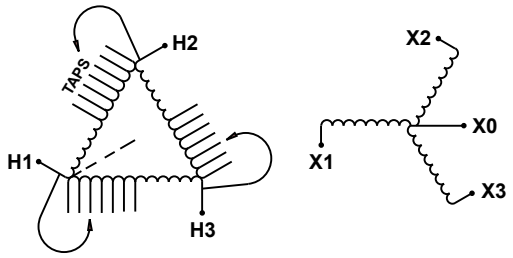

PRIMARY VOLTS	
CONNECT LINES TO H1, H2, H3	
TAP	VOLTAGE
1	COM
1-2	252
1-3	246
1-4	240
1-5	234
1-6	228
1-7	222
1-8	216
1-9	210
1-10	204

SECONDARY VOLTS	
CONNECT LINES	VOLTAGE
X1, X2, X3	460
X0-X1, X0-X2, X0-X3	265

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com


Dry Type Transformer Class AA
LARSON ELECTRONICS
LARSONELECTRONICS.COM
1-800-369-6671
sales@larsonelectronics.com
A14
WARNING
LARSON ELECTRONICS


X1
H3
X2
X4
H1
X3
H2
SO: 233332 – 001
233332


LARSON
ELECTRONICS
A14
WARNING
LARSON
ELECTRONICS



Frequently Asked Questions (FAQ)