Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-DOE16-3P-480D-100KVA-240D.120CT-N3R

100 kVA 3PH DOE Transformer, 480V Delta Primary, 240V/120 Delta Secondary, N3R, Ventilated, 60 Hz

Product ID: 241437



Image: MT-DOE16-3P-480D-100KVA-240D.120CT-N3R

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-DOE16-3P-480D-100KVA-240D.120CT-N3R DOE Efficiency Isolation Transformer

Transformer Type: Isolation Transformer
Transformer Configuration: Dry Type
Phase: Three Phase
Frequency: 60 Hz
Primary Voltage: 480V AC
Primary Connection: Delta
Capacity: 100 KVA
Secondary Voltage: 240V/120V AC
Secondary Connection: High Leg Delta w/ Center Tap
Knockouts: -
FCAN (Above) Taps: 2
FCAN (Below) Taps: 4
Tap %: 2.5
Impedance: 2.5-6.5% typical
Efficiency @ 35% Load: ~98%
Winding Material: Aluminum
Primary Termination (Std): Terminal Lugs
Secondary Termination (Std): Terminal Lugs
Termination Access: Front Access Cover
Mounting: Floor
Cooling: Air/Dry
Insulation: 220°C
Temperature Rise: 150°C
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: NEMA Type 3R Heavy Duty Ventilated - Steel

Approvals/Ratings

NRTL listed for United States
NRTL listed for Canada
NEMA 3R Indoor/Outdoor Steel Enclosure
Meets or Exceeds NEMA ST-20 Standards
DOE Efficiency Isolation Transformer
Distribution Type Transformer
Built to UL-50 Standards
Seismic Qualified for Earthquake Loads
RoHS
CE Certified

Finish: ANSI 61 Grey
Dimensions: 32.63"L x 31.9"W x 35.40"H
Weight: 938 Lbs
Shipping Method: Pallet Freight - LTL
Shipping Weight: -
Shipping Dimensions: -

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-DOE16-3P-480D-100KVA-240D.120CT-N3R Three Phase 480V to 240V/120 100 KVA DOE Efficiency Transformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-DOE16-3P-480D-100KVA-240D.120CT-N3R provides increased reliability and protection against critical equipment failures. This 100 KVA isolation is designed for distribution loads and potential seismic activity. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: The MT-DOE16-3P-480D-100KVA-240D.120CT-N3R DOE Efficiency transformer is a three phase transformer with a 100 KVA capacity rating. This isolation transformer is configured with an input voltage of 480V Delta 3-Phase AC on the primary side and an output voltage of 240V/120 High Leg Delta w/ Center Tap 3-Phase AC on the secondary side. Featuring robust construction, this unit`s cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and is designed to be floor mounted. Wall mount brackets or additional mounting accessories can be purchased separately. This 100 KVA distribution transformer features 220°C insulation with a 150°C temperature rise.

Benefits: The MT-DOE16-3P-480D-100KVA-240D.120CT-N3R 480V to 240V/120 general purpose transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.


This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated floor and wall mounting brackets make installation fast and easy and the offset outward facing floor installation holes allow for easy power tool access.

The MT-DOE series of transformers from Larson Electronics meet or exceed efficiency standards for United States and Canada. This results is overall lower cost of ownership throughout the life of the transformer.


Safety: The MT-DOE16-3P-480D-100KVA-240D.120CT-N3R is an isolation transformer which means that it provides operators with an increased level of protection against electric shock and injury. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-DOE16-3P-480D-100KVA-240D.120CT-N3R achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: Converting 480V local grid power to 240V/120 for on-site equipment. This 100 KVA power transformer is ideal for sensitive equipment such as CNC equipment, computers, medical devices, ovens, or laboratory instruments.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

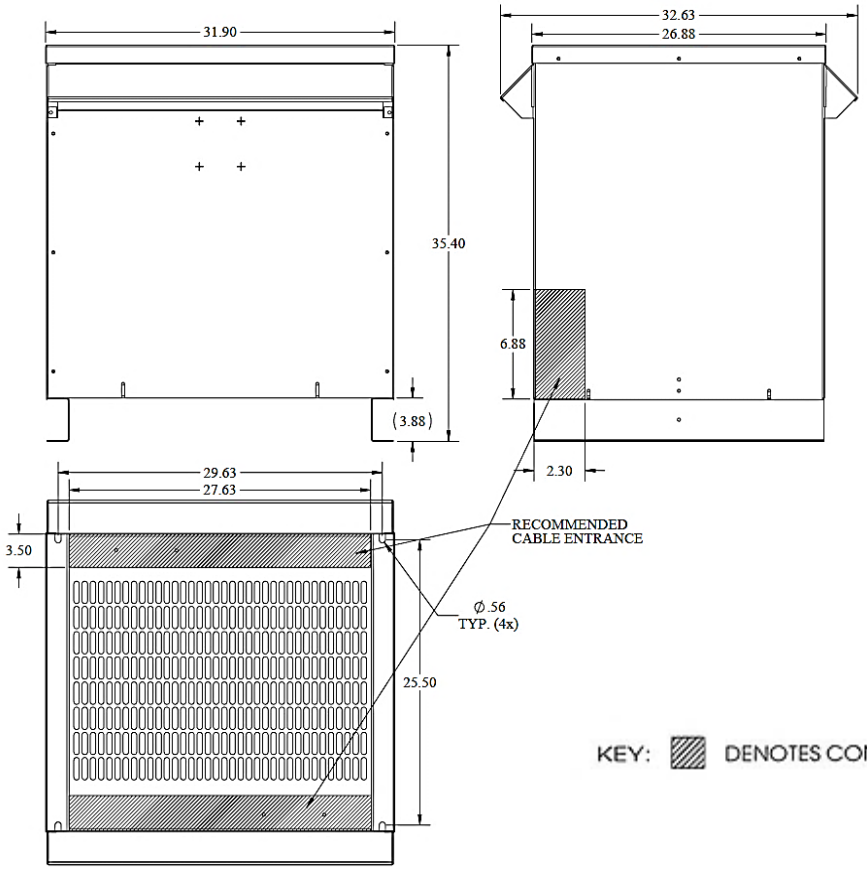

KEY: DENOTES CONDUIT AREAS

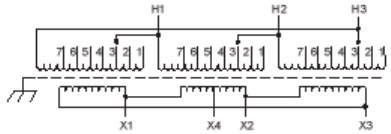

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
504	H1, H2, H3	1	
492	H1, H2, H3	2	
480	H1, H2, H3	3	
468	H1, H2, H3	4	
456	H1, H2, H3	5	
444	H1, H2, H3	6	
432	H1, H2, H3	7	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4

NOTE:
PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		HIGH	LOW				
100	MT-DOE16-3P-480D-100KVA-240D.120CT-N3R	480Δ	240Δ/120		938 Lbs	3ϕ	60Hz

Temp Rise:	150°C	TYPICAL PERFORMANCE DATA						Typical Efficiency @ 35%	98.80%
Insulation:	220°C		Regulation @ 100% PF			Windings:	AL	Typical No Load Losses:	273.43
NEMA ST20 Standard:	50 dB		Standards:	UL/CSA		Impedance:	3.92%	100% Load (Typ) Load Losses (I^2R)	2216.93
Electrostatic Shield:	Option		Approvals:	DOE-2016		Enclosure:	3R	Total Load Lossess:	2490.35

Meets US DOE 2016 Efficiency

REVISIONS


NOTES:
1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI

DATE:


TYPE NO:

CASE 3

LARSON ELECTRONICS

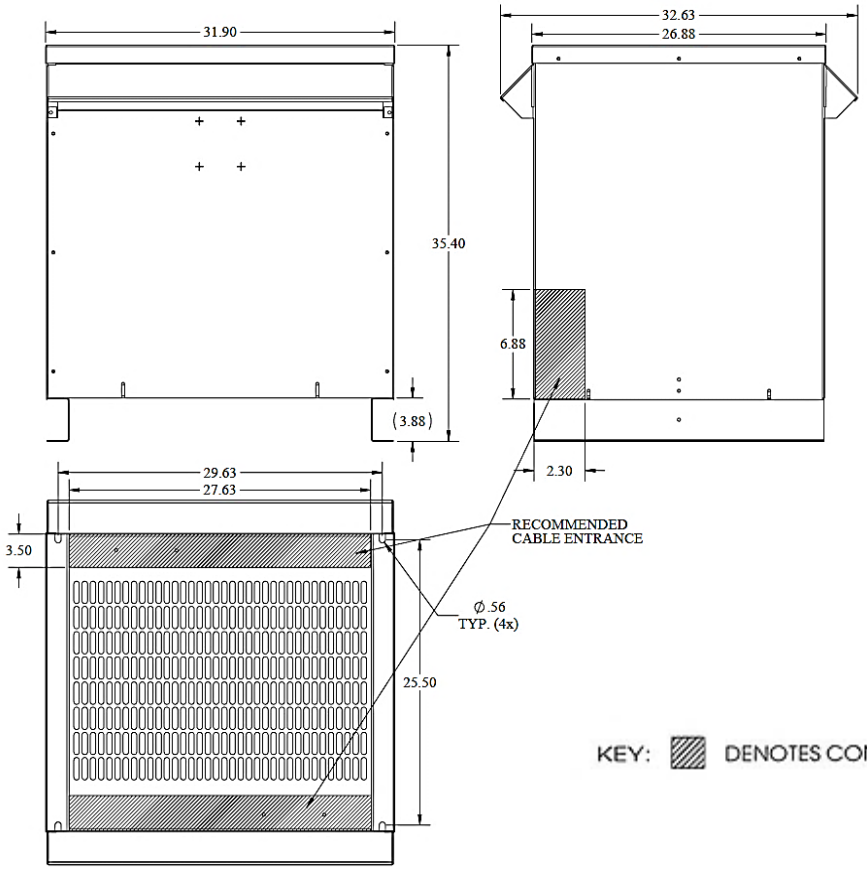

KEY: DENOTES CONDUIT AREAS

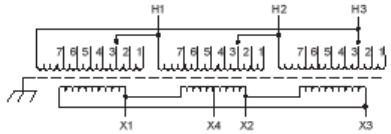

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
504	H1, H2, H3	1	
492	H1, H2, H3	2	
480	H1, H2, H3	3	
468	H1, H2, H3	4	
456	H1, H2, H3	5	
444	H1, H2, H3	6	
432	H1, H2, H3	7	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4

NOTE:
PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		HIGH	LOW				
100	MT-DOE16-3P-480D-100KVA-240D.120CT-N3R	480Δ	240Δ/120		938 Lbs	3ϕ	60Hz

Temp Rise:	150°C	TYPICAL PERFORMANCE DATA						Typical Efficiency @ 35%	98.80%
Insulation:	220°C		Regulation @ 100% PF			Windings:	AL	Typical No Load Losses:	273.43
NEMA ST20 Standard:	50 dB		Standards:	UL/CSA		Impedance:	3.92%	100% Load (Typ) Load Losses (I^2R)	2216.93
Electrostatic Shield:	Option		Approvals:	DOE-2016		Enclosure:	3R	Total Load Lossess:	2490.35

Meets US DOE 2016 Efficiency

REVISIONS

NOTES:
1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI

DATE:

TYPE NO:

CASE 3

LARSON ELECTRONICS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MT-ATX, MT-BBT, MT-DIX, MT-DOE10, MT-DOE16, MT-ISX, and MT-PMD industrial line of transformers are considered "ARTICLES" under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

i. Which is formed to a specific shape or design during manufacture;
ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs