Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

LE-6067-F

LED Diffused Flood Light - 12-24V DC, 5000 Lumens - (2) Wireless Remotes - Permanent Mount - White Housing

Product ID: 256



Image: LE-6067-F

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

LE-6067-F LED Diffused Flood Light w/ (2) Wireless Remotes

Lamp Technology: LED
Light Dimensions: 5.9" x 7.1" x 7.5"
Base Dimensions: 6.06" x 6.06"
Remote Qty: (2)
Weight: 4.2 lb
Voltage: 12 V DC or 24 V DC
Total Watts: 50W
Lumens: 5,000
Candela: 550,000
Beam Distance: 4,915 Feet
Luminous Efficacy: 100 Lm/W
LED Life Expectancy: 50,000+ Hours
LED Light Color: White
Correlated Color Temperature: 5,700-6,000K
Beam Angle: -
Lighting Configuration: Flood
Light Head Rotation: 360° - Continuous
Elevation Angle: 135°
Rotation Speed: 19° per Second (Fast), 19° per Second (Slow)
Elevation Speed: 11° per Second
Wireless Remote Control Frequency: 433.92 MHz
Remote Controls: On/Off, Up, Down, Left, Right, Speed Control
Wireless Remote Distance: 215'
Wireless Remote Batteries: (4) 23A (2 Per Remote) - Included
Amps: 4 A @ 12 V DC, 2 A @ 24 V DC

Ratings/Approvals

IP68 Rated LED Module
IP56 Rated Housing
FCC Approved
Auto-Home Return

Ambient Operating Temp Range: -30°C to +70°C
Housing Material: Acrylonitrile Styrene Acrylate (ASA)
Lens Material: Hardened Polycarbonate
Mount: Permanent Mount - 4.92" x 4.92" Distance between (4) Mounting Holes
Wiring: -
Housing Color: White

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail:sales@larsonelectronics.com

The LE-6067-F from Larson Electronics is a LED Diffused Flood Light that provides diffused light output in a flood pattern for outdoor locations and is recommended for area lighting, general illumination, landscape lighting, accent lighting, security lighting, and more. This LED light operates on 12 V or 24 V DC and provides 5000 Lumens of output during use. Equipped with a pair of wireless remotes, the LED light with white housing is compatible with permanent mounting installations.

The LE-6067-F is a powerful lighting solution for outdoor areas, rugged environments, and remote locations. A total of ten, 5-watt LEDs provide a flood light beam that can illuminate wide areas. The low voltage LED search light generates 5000 Lumens of output. During use, this unit rotates at a rate of 19° per second in fast mode and 12° per second in slow mode, as well as elevates at a rate of 11° per second. The LED module carries an IP68 rating and the housing is IP56 rated. Equipped with an acrylonitrile styrene acrylate (ASA) housing, the lens is made out of hardened polycarbonate.

Remote Control: This unit comes with two wireless handheld remote controls. Each wireless handheld remote operates on 433.92 MHz and enables on/off, up, down, left, right, and strobe on/off operation. Powered by two 23A batteries (included), each remote has an operating distance of 213'. Up to four wireless remote controls can be used with the LED light.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Voltage: The LED diffused flood light operates on 12 V DC or 24 V DC.

Mount: This unit is compatible with permanent mounting installations via four mounting holes. There is a distance of 4.92" x 4.92" between the mounting holes.

Applications: Outdoor lighting, area lighting, general illumination, landscape lighting, accent lighting, security lighting, and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

SHENZHEN THUMBCELLS CO., LTD.



23A/12

TECHNICAL SPECIFICATION
FOR
ALKALINE MANGANESE DIOXIDE BUTTON CELL

PREPARED BY : LEE FA
APPROVED BY : SHAN JUNXIONG
DATE : 8. 18, 2006
SPEC. NO. : THUMBCELLS-23A-E


SHENZHEN THUMBCELLS CO., LTD.
RM613, TianJian Building, No.7,Business Newspaper Office Rd.,
Futian Dist,ShenZhen, China.
Tel: (86) 0755-81509623;88853506 Fax: (86) 0755-29984108
E-mail: thumbcells@126.com http://www.thumbcells.cn

The Manufacturer reserves the right to modify product specification and data stated herein without prior notice.

DATE : 8. 18, 2006
SPEC. NO. : THUMBCELLS-23A-E

A23 Battery


DIMENSIONS:

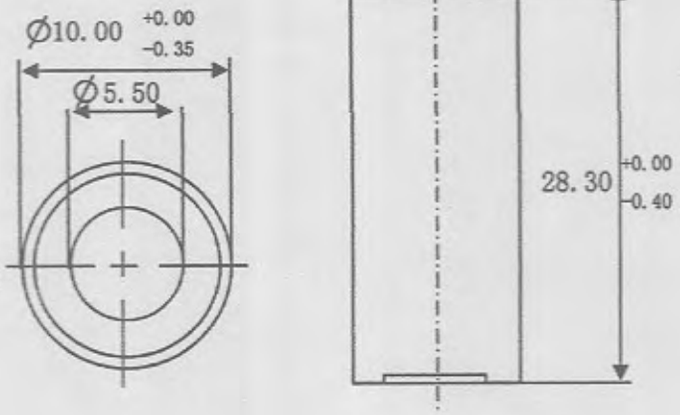



NOMINAL VOLTAGE : 12 VOLT
APPROX. SERVICE CAPACITY : 50 mAh
APPROX. WEIGHT : 8.1g
RATED AT 20,000 OHMS LOAD TESTED AT 21°C WITHIN 30 DAYS OF MANUFACTURE.
SYSTEM : ZIN/MANGANESE DIOXIDE

ESTIMATED AVERAGE HOURS SERVICE AT 21°C

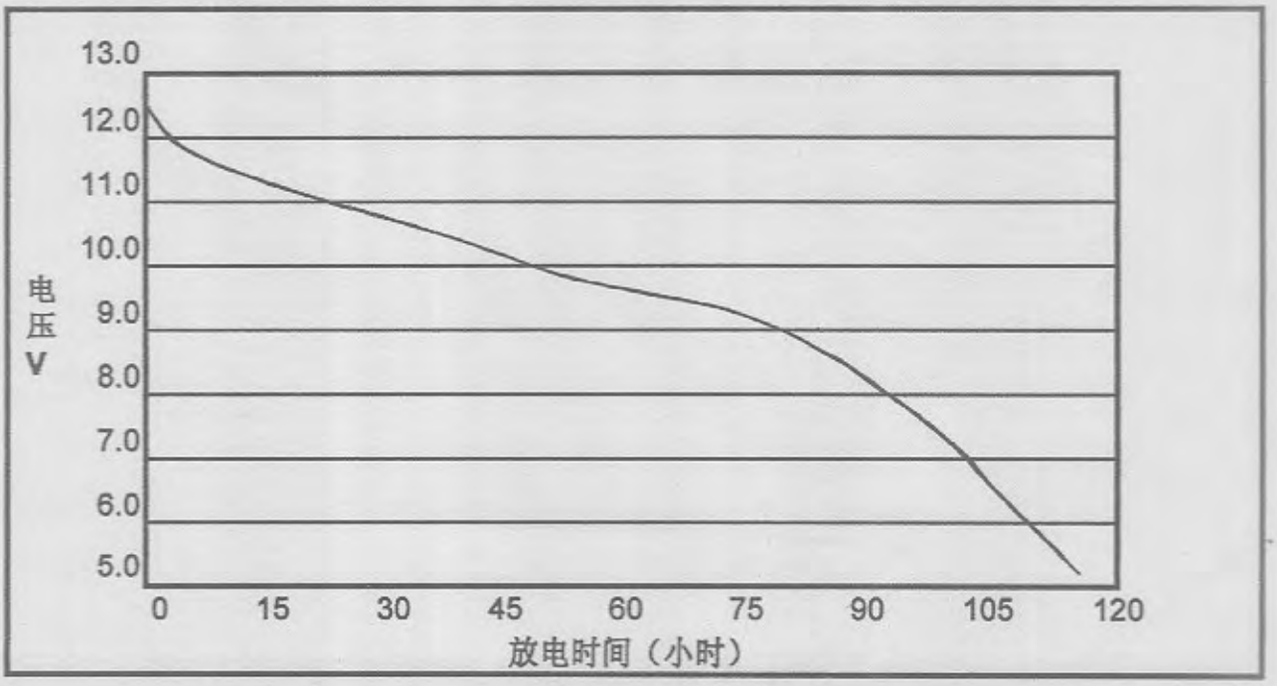

AOV®

MSDS REPORT

NO.: ASZ09102906001 Date: Nov 07, 2009

MSDS Report

Samples Name: button zinc manganese battery

Model: AG0, AG1, AG2, AG3, AG4, AG5, AG6, AG7, AG8, AG9, AG10, AG11, AG12, AG13, LR521, LR621, LR726, LR41, LR626, LR754, LR921, LR926, LR1120, LR936, LR1130, LR721, LR43, LR44, LR632, LR932, 23A, 27A, L736H, L736C, L1131H, L1131C, L1154H, L1154C, 625A, L521H, L621H, L726H, L626H, L754H, L921H, L926H, L1121H, L936H, L721H, L1142H

Client Name: shenzhenthumbcells co.ltd

Client Address: 161 building,the 2nd zone,Baoyuan Road. Xixiang Avenue,BaoAN District,Shenzhen City

Written by: Daisy

Inspected by:

Approved by:

AOV®

MSDS REPORT

NO.: ASZ09102906001 Date: Nov 07, 2009

Material Safety Data Sheet

Section 1 - Chemical Product and Company Identification

Product Name: button zinc manganese battery

Manufacture: /

Address: /

Tel: 0755-8885-3506

Emergency Telephone: 0755-8885-3506

Fax: 0755-29984108

Email: sales@thumbcells.com

Section 2 - Hazards Identification

Fatalness grade: In accordance with Directive 1999/45/EC, the sample belongs to dangerous goods.

Invasion route: Skin touch: No effect under routine handling and use

Eyes touch: No effect under routine handling and use

Inhalation: No effect under routine handling and use

Ingestion: No effect under routine handling and use

Health hazards: These chemicals are contained in a sealed can. Risk of exposure occurs only if the battery is mechanically or electrically abused. Contact of electrolyte and extruded lithium with skin and eyes should be avoided.

Environment hazards:

Burn & burst danger: A shorted lithium battery can cause thermal and chemical burns upon contact with the skin. It may be a reproductive hazard.

Section 3 –Composition/Information on Ingredient

Pure☐ Admixture☐

Composition:

Chemical Name	In % By Weight	CAS No.
Manganese dioxide	30	1313-13-9
Graphite	3	7782-42-5
Zinc powder	2	7440-66-6
Potassium hydroxide	8	1310-58-3;71769-53-4
Metal casing	57	/

Section 4 - First Aid Measures

Skin touch: Remove contaminated clothes and rinse the skin with plenty of water.

Eyes touch: Lifting the upper and lower eyelids, flush the eyes with plenty of water or saline water. Get medical aid.

Inhalation: Remove from exposure and move to fresh air immediately. Keep the respiratory tract smooth. Use oxygen if available. Get medical aid.

Ingestion: Drink sufficient hot water and induce vomiting. Get medical aid.

AOV®

MSDS REPORT

Section 5 - Fire Fighting Measures

Danger characteristic: It is apt to flame under the condition of fire, when the electrolyte is extruded

Extinguishing Media: Carbon monoxide, carbon dioxide

Fire-Fighting method & media: The staff must equipped with filtermask(full mask) or isolated breathing apparatus. The staff must wear the clothes which can defence the fire and the toxic gas. Put out the fire in the upwind direction. Remove the container to the open space as soon as possible. Sparying water on the containers in the fireplace to keep them cool until finish extinguishment. If the containers in the fireplace whose color have changed, or can hear the voice from the safety relief equipment, the person must evacuate at once. Media: foam, powder, Co_2, sandy clay.

Section 6 –Accidental Release Measures

Emergency treatment: If the battery material is released, remove personnel from area until fumes dissipate. Provide maximum ventilation to clear out hazardous gases. Wipe it up with a cloth, and dispose of it in a plastic bag and put into a steel can. The preferred response is to leave the area and allow the batteries to cool and vapors to dissipate. Provide maximum ventilation. Avoid skin and eye contact or inhalation of vapors. Remove spilled liquid with absorbent and incinerate

Waste Disposal Method. It is recommended to discharge the battery to the end, to use up the metal lithium inside the battery, and to bury the discharged battery in soil.

Section 7 - Handling and Storage

Handling: The batteries should not be opened, destroyed or incinerate, since they may leak or rupture and release to the environment the ingredients that they contain in the hermetically sealed container. Do not short circuit terminals, or over charge the battery, forced over-discharge, throw to fire. Do not crush or puncture the battery, or immerse in liquids.

Storage: Storage preferably in cool, dry and ventilated area, which is subject to little temperature change. Storage at high temperature should be avoided. Do not place the battery near heating equipment, nor expose to direct sunlight for long periods.

Section 8 - Exposure Controls, Personal Protection

Maximum admissible concentration: No standard yet

Monitoring Method: /

Engineering Control: To supply with sufficient partial air exhaust.

Respiratory Protection: Wear self-contained breathing filtermask(full mask) if the density exceed in the air. Wear breathing apparatus under the condition of emergency rescue or evacuation.

Eyes Protection: Have been mentioned in the respiratory protection.

Body Protection: Wear rubberized fabric antigas clothes.

Hands Protection: Wear rubber gloves.

Other Protections: No smoking, dining and drinking water in the workplace. Keep good habit of hygiene.

Section 9 - Physical and Chemical Properties

Flash Point: /

Appearance: silvery button battery

Boiling Point: /

Proportion: /

Acid Value: /

PH Value: /

Permission of solvent inhalation: /

Solubility: Don't soluble in water

Section 10 - Stability and Reactivity

Stability: Stable under normal temperature.

Distribution of Ban: strong oxidizer and strong acid

Conditions to Avoid: Heating, mechanical abuse and electrical abuse.

Hazardous Polymerization: If leaked, forbidden to contact with strong oxidizers, mineral acids, strong alkalies, halogenated hydrocarbons.

Hazardous Decomposition Products: /

Section 11 - Toxicological Information

Acute Toxicity: /

Sub-acute and Chronic Toxicity: /

Irritation: /

Sensitization: /

Mutagenicity: /

Carcinogenicity: /

Others: /

Section 12 - Ecological Information

Eco-toxicity: Ecological inert: /

Biodegradable:

Non-biodegradable: /

Bioconcentration or biological accumulation: /

Other harmful effects: /

Section 13 - Disposal Considerations

Nature of waste: /

Waste disposal methods: Refer to National or Local regulations before handling.

Attention abandoned: /

Section 14 - Transport Information

Number of dangerous goods: /

UN Number: /

Packaging Mark: /

Packaging Method: /

Transport Attentions: More information concerning shipping, testing. More information concerning shipping, testing, marking and packaging can be obtained from Labelmaster at http://www.labelmaster.com.

Separate Li-Polymer rechargeable batteries when shipping to prevent short-circuiting. They should be packed in strong packaging for support during transport.

Section 15 - Regulatory Information

Regulatory Information: <<Dangerous Goods Regulation>>(IATA)

<<International Maritime Dangerous Good

Law Information

In accordance with all Federal, State and Local laws.

Section 16 - Additional Information

References: /

Guidance departments: /

Data audit unit: /

Laws Help: /

Other Information: The above information is based on the data of which we are aware and is believed to be correct as of the data hereof. Since this information may be applied under conditions beyond our control and with which may be unfamiliar and since data made available subsequent to the data hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

There are no Faqs