

### HLSW-PB20-ES-LCK-M3

## Non-Metallic Explosion Proof Master Emergency Stop Push Button with Lockout Device - Mushroom Head - C1D2 - C2D2 - C3D1&2

Product ID: 270748



Image: HLSW-PB20-ES-LCK-M3

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

#### HLSW-PB20-ES-LCK-M3 Non-Metallic Mushroom Head Master Emergency Stop

##### Switch w/ Lockout Device

**Type:** Mushroom Head Master Emergency Stop Switch

**Dimensions:** 3.95"W x 4.21"H x 4.16"D

**Voltage Rating:** 690 V AC, 50/60 Hz

**Amperage Rating:** 20 A

**Horsepower Rating:** 2 HP

**Ambient Operating Temp Range:** -50°C to +60°C

**UV Protection:** f1

**Housing Materials:** Non-Metallic Glass Reinforced Impact Resistant Antistatic Material

**Housing Color:** Black

**Button Color:** Red

**Lockout Device:** Yes - Aluminum Lockout Device / Button Guard w/ "MASTER EMERGENCY STOP" Label

**Flame Retardant Rating:** V-0

**Gasket Material:** Silicone

**Mounting:** Din Rail Mount

**Wiring Hub:** (1) 1/2" NPT Hub or (1) M20 Clearance Hole Hub

**Configuration:** Pull Release or Twist Release

##### Ratings/Approvals

Class I, Division 2, Groups A, B, C, D

Class I, Zone 1, AEx de IIC T4/T5/T6 Gb

Class II, Division 2, Groups E, F, G

Class II, Zone 2, Aex tb IIIC T4/T5/T6 Db IP66

Class III, Divisions 1 & 2

II 2 G Ex de IIC T4/T5/T6 Gb

II 2 D Ex tb IIIC T4/T5/T6 Db IP66

NEMA 3, 4, 4X, 12, 13

Aluminum Lockout Device w/ "MASTER EMERGENCY STOP" Label

##### Special Orders - Special Requirements

Contact us for special requirements

**Toll Free:** 1-800-369-6671

**Intl:** 1-903-270-1187

**E-mail:** [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com)

The HLSW-PB20-ES-LCK-M3 from Larson Electronics is a non-metallic mushroom head

**emergency stop push button with lockout device that is rated for Class I Division 2 Groups A, B, C & D, Class II, Division 2, Groups E, F & G and Class III, Divisions 1 & 2 hazardous environments. This ATEX certified single mushroom head emergency stop push button switch has a din rail mount design and is constructed of an impact resistant glass reinforced non-metallic material with silicone gaskets. The HLSW-PB20-ES-LCK-M3 has a black housing color with a red button and boasts a compact size for convenient mounting and use. The HLSW-PB20-ES-LCK-M3 is equipped with an emergency stop shroud and lockout device. The device is constructed from aluminum and protects the button from being pushed or activated accidentally. The emergency stop shroud is also equipped with a through-hole that allows a lockout pin to be used and a red label with the message "MASTER EMERGENCY STOP".**

This Class I Division 2 Groups A, B, C & D rated non-metallic mushroom head emergency stop push button switch is designed for din rail mounting. It is ideal for mounting and use in petroleum refineries, chemical plants, petrochemical plants and other facilities where similar conditions exist. The HLSW-PB20-ES-LCK-M3 has explosion protected contact blocks that are rated for voltages up to 690 V AC, is capable of handling 20 amps for switching duty and has a horsepower rating of 2 HP. This switch also features silver alloy contacts with gold flashing. This non-metallic mushroom head emergency stop push button switch has an ambient operating temperature of -50°C to +60°C and can be used in conjunction with motor starters or contactors for remote operation of motors.

The HLSW-PB20-ES-LCK-M3 C1D2 non-metallic single push button mushroom head master emergency stop switch features a non-metallic housing that is constructed of a PA6 glass reinforced antistatic material that is impact resistant, f1 UV resistant and has a flame retardant rating of V-0. The housing on this switch is black while the border around the button and the button itself are red which offers plenty of contrast for easy visibility of the button. The HLSW-PB20-ES-LCK-M3 features silicone gasketing throughout. This switch is available in either a 1/2" NPT hub or a M20 clearance hole hub. This switch is also available in a pull release or twist release configuration. Please make your selections when ordering below.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message [sales@larsonelectronics.com](mailto:sales@larsonelectronics.com) for more information about our custom options tailored to meet your specific industry needs.






Larson Electronics LLC  
9419 E US HWY 175, Kemp, TX 75143  
Phone: 800.369.6671



[www.LarsonElectronics.com](http://www.LarsonElectronics.com)  
Email: [sales@LarsonElectronics.com](mailto:sales@LarsonElectronics.com)  
Fax: 903.765.7664



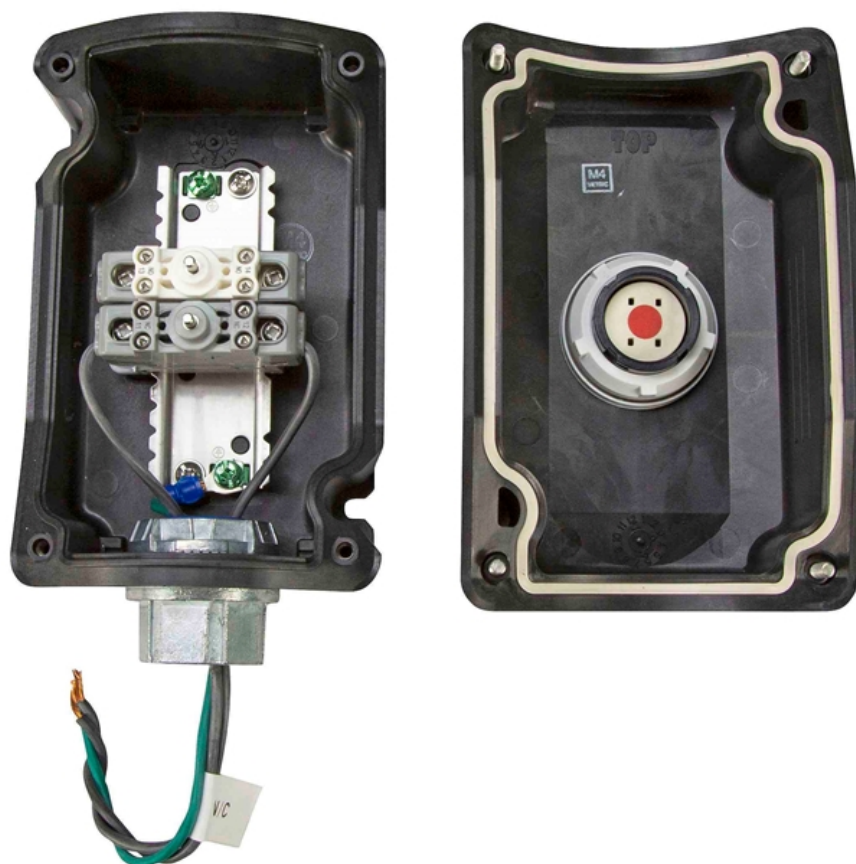



---

## Frequently Asked Questions (FAQ)

There are no Faqs