

EXP-RT-SPST-MIN.30

Explosion Proof Timer Switch - Class I, II, III - 30-Minute Timer, SPST Switch - NEMA - 120-277V AC

Product ID: 272385



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXP-RT-SPST-MIN.30 Explosion Proof Timer Switch

Listing: NRTL Listed for United States, Canada

Unit Type: Explosion Proof Timer Switch

Dimensions: 5.1"-L x 3.625"-W x 6.663"-H

Minutes: Up to 30 Minutes

Configuration: DPST

Voltage: 120-277V AC 50/60 Hz

Timer Control: Mechanical Spring

Amperage: 20A @ 125V AC (7A for Tungsten loads), 10A @ 250 VAC, 10A @ 277V AC

Horsepower: 1HP @ 120V AC, 2HP @ 240V AC

Ambient Operating Temp: -40 °F to 104 °F (-40 °C to 40 °C)

Unit Materials: Copper-free Cast Aluminum

Mounting: External Mounting Lugs on Body

Hub Quantity: (2) Feed Through or (1) Dead End

Hub Size: 1/2" or 3/4"

Ratings/Approvals

Class I, Divisions 1&2 Groups C,D

Class II, Divisions 1&2 Groups E,F,G

Class III, Divisions 1&2

NEMA 3,7(BCD),9(EFG),12

No Power Input Required for Timer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in Texas

The Larson Electronics EXP-RT-SPST-MIN.30 Explosion Proof Timer Switch provides timed controls for equipment in combustible work sites and locations. The 30-minute timer can be configured using a SPST switch. Constructed of copper-free aluminum, the unit is NEMA-rated for durability in rugged environments.

The EXP-RT-SPST-MIN.30 offers robust timing control of equipment. This unit is equipped with a single pole single throw switch, which allows operators to set the timer to 30 minutes. The explosion proof timer switch is designed for Class I,

Division 1 and 2; Class 2, Division 1 and 2; and Class III environments and operates on 120-277 V AC 50/60 Hz ; 20 A @ 125 V AC (7 A for Tungsten loads), 10 A @ 250 V AC, 10 A @ 277 V AC. It uses 1 HP @ 120 V AC and 2 HP @ 240 V AC.

The EXP-RT-SPST-MIN.30 is constructed of copper-free cast aluminum for superior performance and durability. These switches are not factory sealed and require external sealing fittings. Two external mounting lugs provide simple and secure mounting of the unit to walls and flat surfaces. This explosion proof unit is available with either 1/2" or 3/4" NPT tapped hubs. The conduit openings are provided on the top and bottom of the unit in feed through versions, while dead-end versions have a single conduit hub, providing easy and secure connection to main power line supplies. Operating temperature is -40 °F to 104 °F (-40 °C to 40 °C).


Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present. This switch can be used with fans, motors, heaters, and lighting (including incandescent, halogen, compact fluorescent, tungsten, and LED lighting loads).

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

	8	7	6	5	4	3	2	1
	REV	DESCRIPTION						DATE
	A	PRODUCTION RELEASE						10-02-2023
EXP-RT-SPST-MIN-30-XX-XX 								
	8	7	6	5	4	3	2	1

EXP-RT-SPST-MIN-30-XX-XX



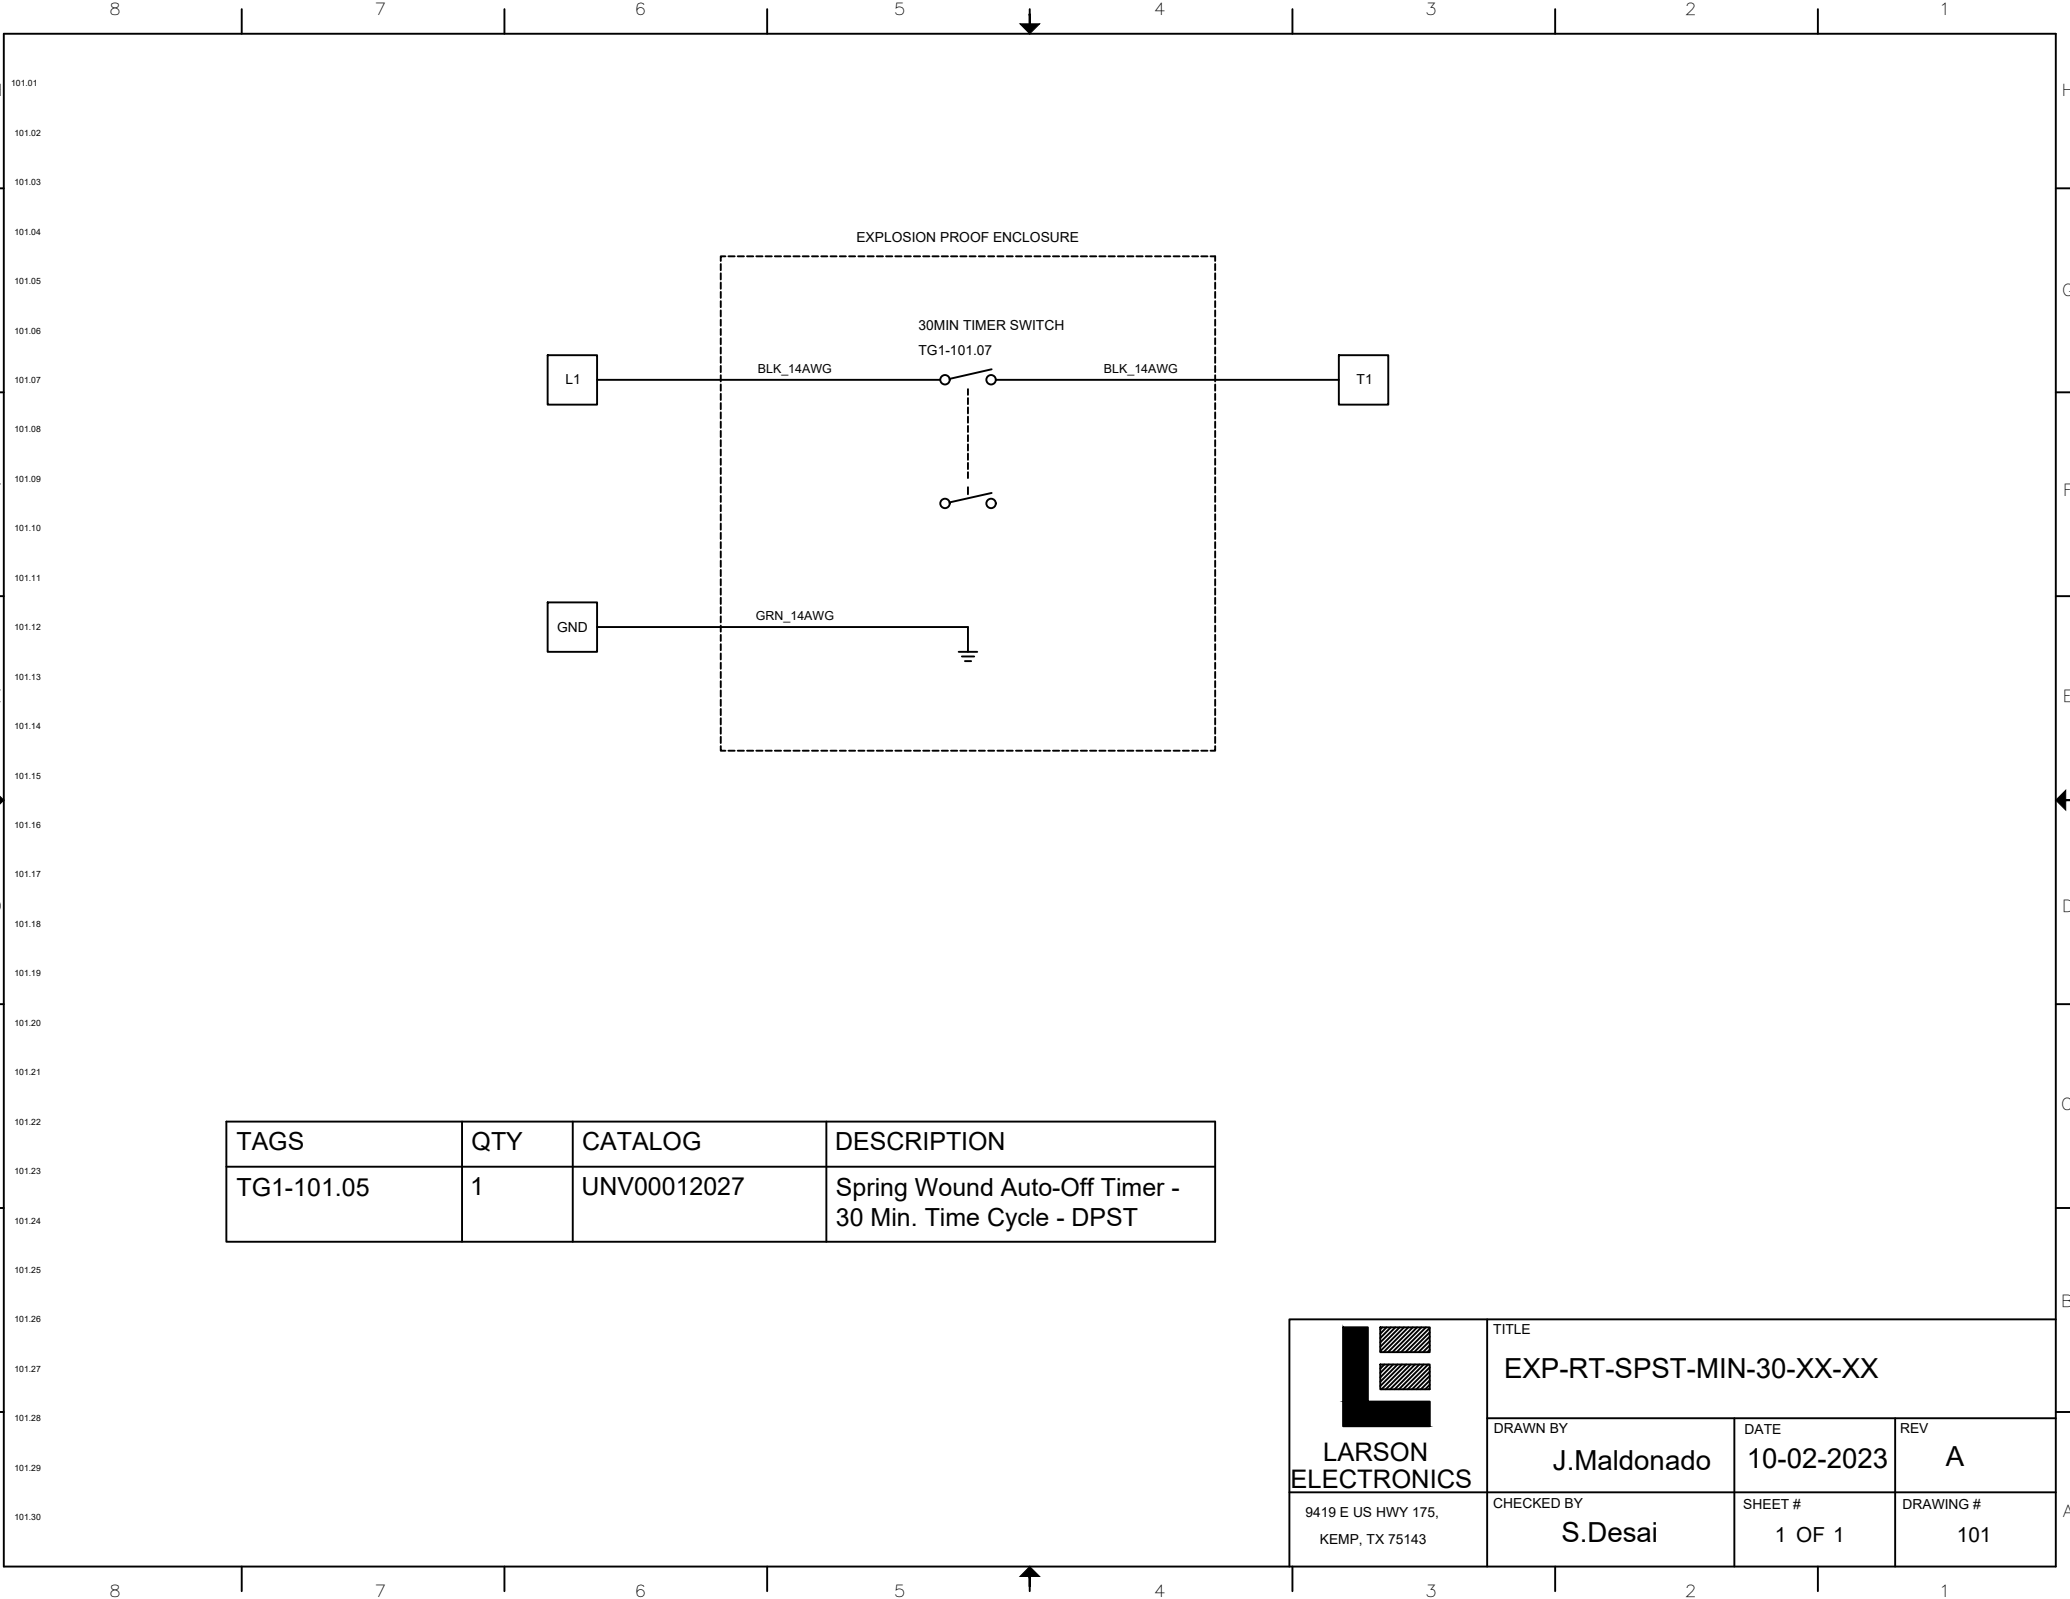


TAGS	QTY	CATALOG	DESCRIPTION
TG1-101.05	1	UNV00012027	Spring Wound Auto-Off Timer - 30 Min. Time Cycle - DPST



LARSON
ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE EXP-RT-SPST-MIN-30-XX-XX		
DRAWN BY J.Maldonado	DATE 10-02-2023	REV A
CHECKED BY S.Desai	SHEET # 1 OF 1	DRAWING # 101

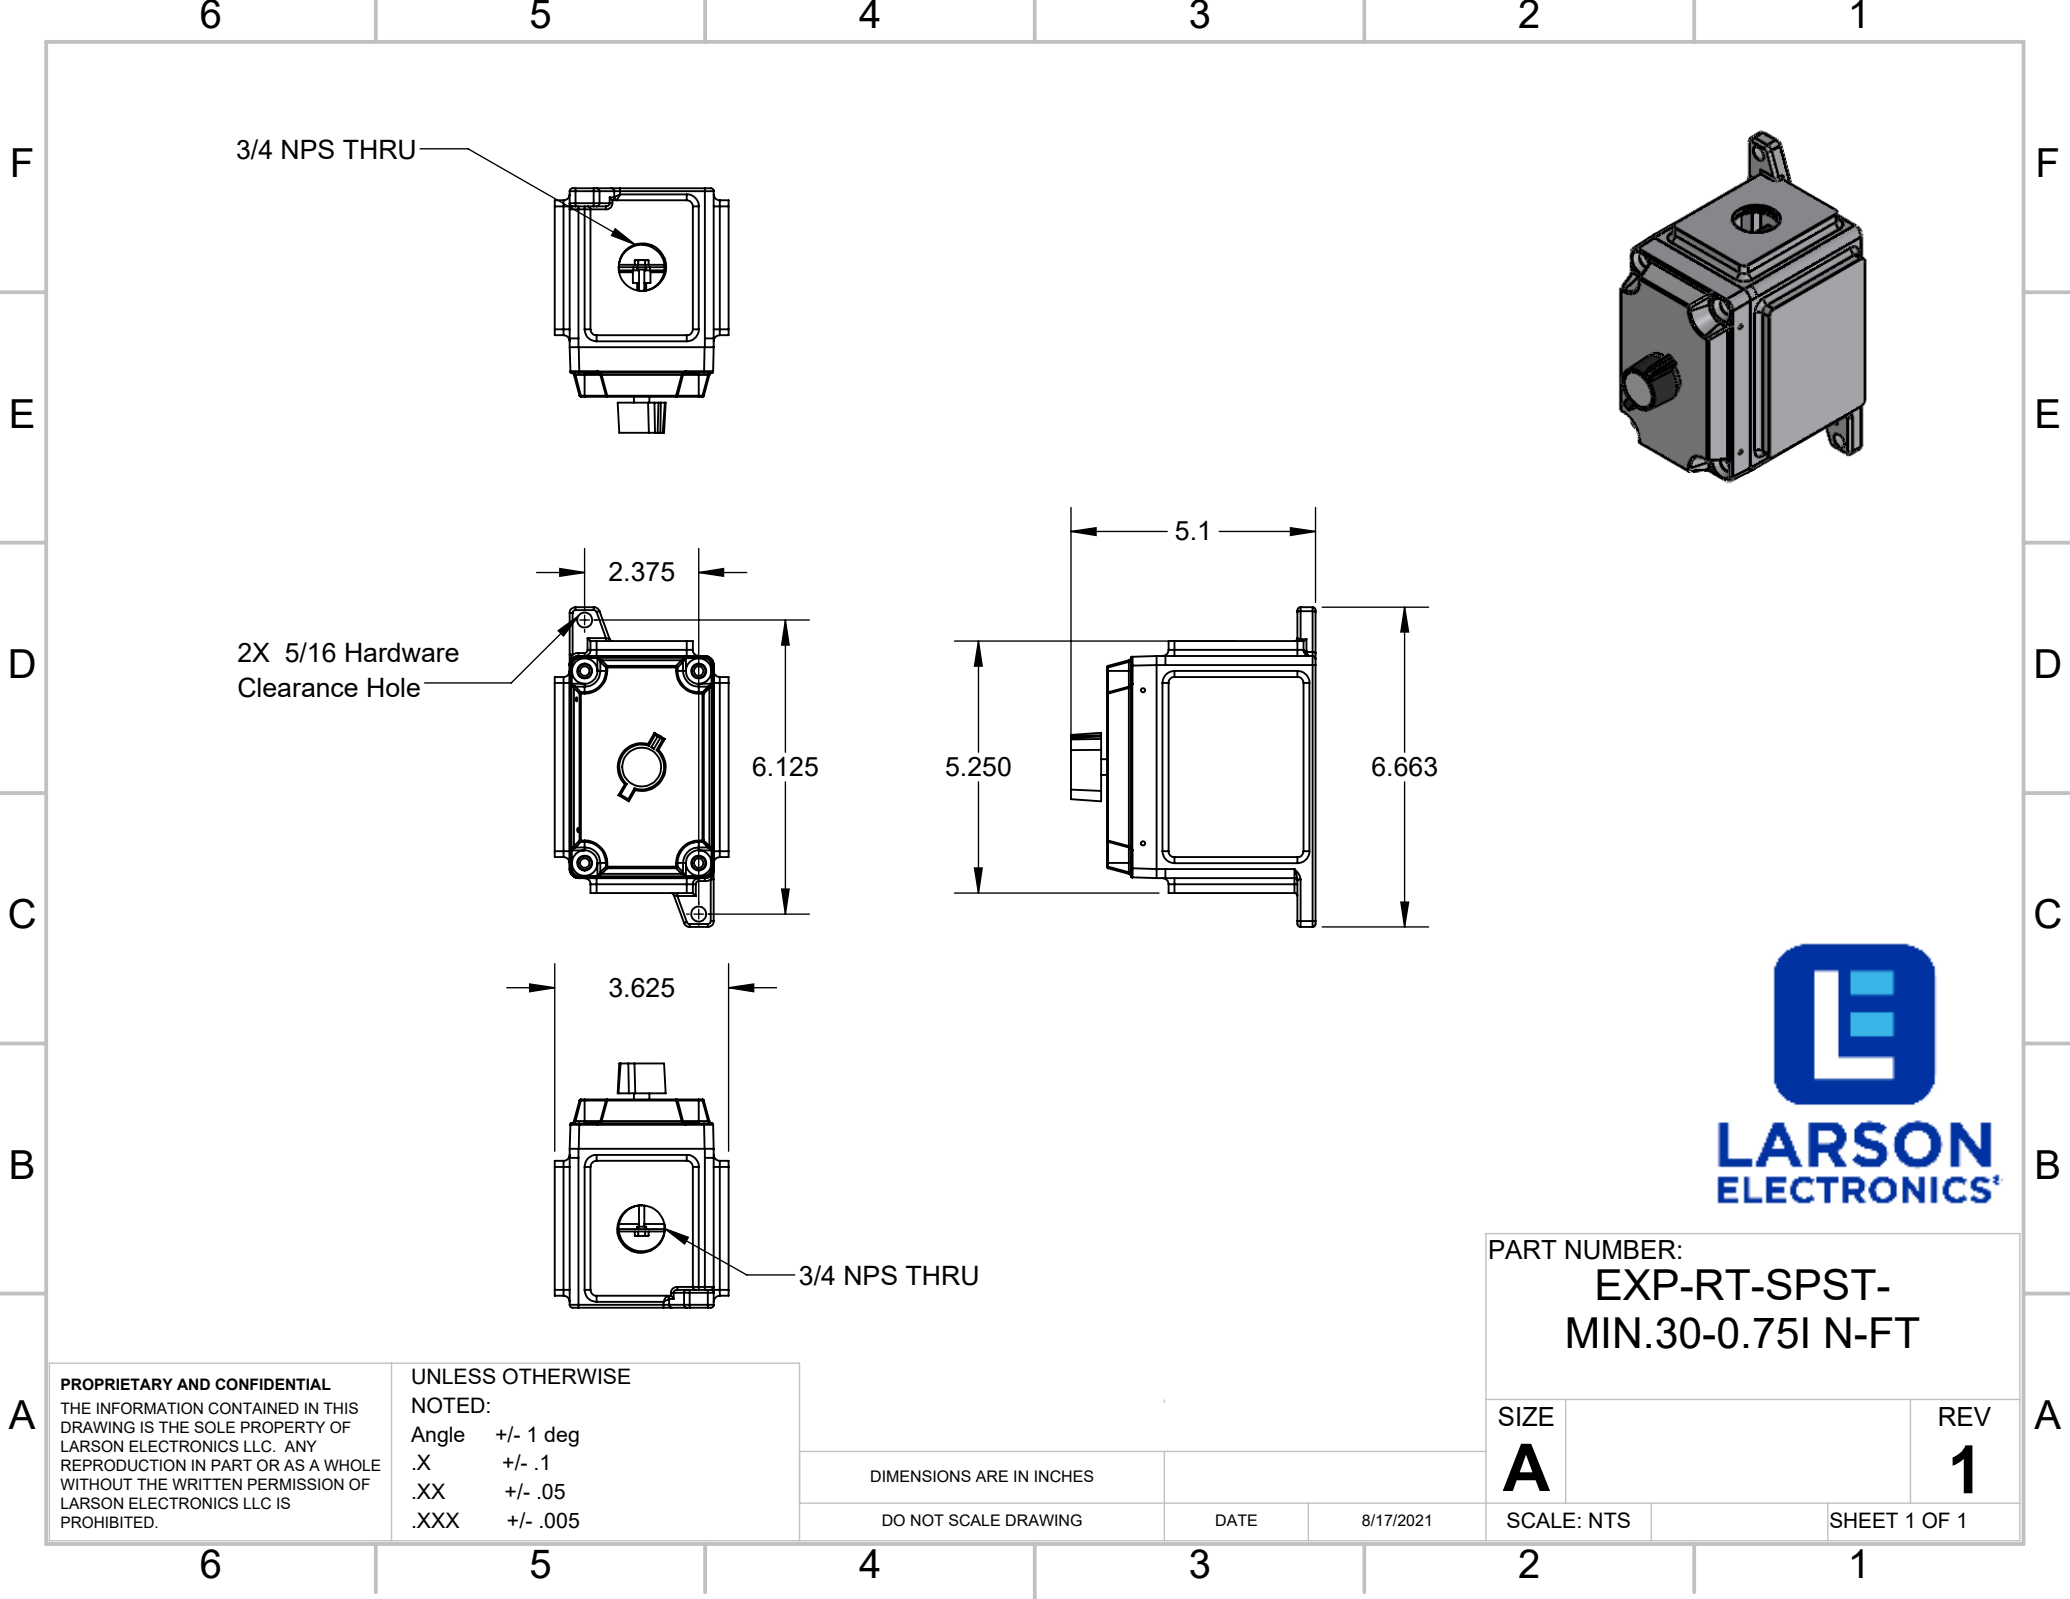

3/4 NPS THRU

2X 5/16 Hardware Clearance Hole

3/4 NPS THRU



PART NUMBER: EXP-RT-SPST- MIN.30-0.75I N-FT			
SIZE A			REV 1
SCALE: NTS			SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

UNLESS OTHERWISE

NOTED:

Angle +/- 1 deg
.X +/- .1
.XX +/- .05
.XXX +/- .005

DIMENSIONS ARE IN INCHES

DO NOT SCALE DRAWING

DATE

8/17/2021

SCALE: NTS









Frequently Asked Questions (FAQ)