

SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1

Mobile Solar Security Tower - 30' Mast, 7.5' Trailer - (2) 300W Panels (5) Cameras, 2TB NVR, Wireless Router - Diesel Gen./NDAA

Product ID: 275963



Image: SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1 Trailer Mounted Solar Security Mast

Mast Specs

Tower Length: Telescoping to 30"

Stages: 5

Mast Head Length: 44"

Materials: Steel

Finish: Powder Coated - Gloss Blue

Operation: Electric Winch

Mast Cable: 3/16" Galvanized Aircraft Cable

Solar Specs

Panels: (2) 300 Watt panels

Method of Deployment: Fixed Mount

System Voltage: 12 Volts

Solar Charge Controller: 40A MPPT

Battery Bank: (15) 40aH Lithium-ion Batteries

Battery Capacity: 600aH Total / 600aH Usable

Battery Charger: 120V - Connected to Backup Genset

Inverter: 600W [120V]

System Runtime: -

Backup Generator Specs

Fuel Type: Diesel

Total Watts: 4,000W

Quick Summary

National Defense Authorization Act (NDAA) Compliant
30' Solar Light Tower
Steel Construction
Powder Coated Finish
Removable Mast Head
125 mph Wind Resistance
Electric Winch Operation
(2) 300 Watt Solar Panels
Fully Solar, No Fuel Needed
120V Battery Charger
Foldable Tongue
2 TB NVR
GPS Tracking
Blue LED Strobe Light
600W Inverter
4kW Backup Diesel Generator
(1) PTZ Camera
(4) Fixed Bullet Camera
1-way PA System
Collapsed Mast Clears Standard Bridges

Fuel Tank Capacity: 30 Gallons

Autostart: When Battery Bank Reaches Below 30% Capacity

LED Strobe Light Specs

Lamp Type: LED

Voltage: -

Watts: -

LED Expected Lifespan: 50,000+ Hours

LED Color: Blue

Light Pattern: Strobe

Amps: -

Materials: -

Mount: Mast

PA System Specs

PA Unit Type: 1-way Talking

Speakers: (2) 50W

Mount: Mast

PTZ Camera Specs

Camera Type: PTZ Outdoor Camera

Camera Qty: (1)

Single-camera Watts: 25.5 (Max)

Voltage: -

Image Sensor: CMOS

Connectors: 1.0Vp-p, 75 Ohm, BNC

Resolution: 720p and 1080p

Min. Illumination: 0.02 Lux @ F1.6 AGC On, 0 Lux w/ IR

Electronic Shutter: 1 ~ 1/10,000s

Lens: 4.7-94mm Varifocal Lens

Angle of View: 58.3° (Wide) ~ 3.2° (Tele)

Rotation: 360°

Zoom: 12x Digital, 30x Optical

Day/Night: ICR

IR Distance: 492' (850 nm)

Video Framerate: 1080p @ 30fps

Video Offload: MP4

Video Output: (1) BNC

Language: English

Ambient Temperature Range: -22°F to 149°F

Housing Materials: Aluminum

Lens Material: Polycarbonate

Mount: Mast

Bullet Camera Specs

Camera Type: Fixed Position Bullet Camera

Camera Qty: (4)

Total Watts: -

Voltage: -

Megapixels: 5MP

Position: Downwards

Coverage: 360° (Trailer and Surrounding Area of Trailer)

Materials: -

Mount: Mast

Network Video Recorder Specs

Storage Capacity: 8 TB SATA Hard Drive
Channels: 8
Camera Resolution Support: Up to 8 MP
Installation Type: Plug and Play
Incoming/Outgoing Bit Rate: : 40 Mbps/80 Mbps
Frame Rate (fps): 60 fps per Channel
Recording Modes: Continuous, Schedule, Event, Motion Detection and VCA
Export Format: MP4
Video Outputs: (1) RCA, (1) VGA, (1) HDMI, (1) USB 2.0 (Front), (1) USB 3.0 (Rear)
PoE: = 120W, Supported Standards- 802.3af and 802.3at
Alarm Input: 4x (Rear Panel), Camera Dependent
Alarm Output: 1x (Rear Panel), Camera Dependent
Protocols: IPv4, TCP/IP, UDP, HTTP, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, ONVIF, HTTP Multipart
Materials: Aluminum

Router Specs

Wireless Router Type: Pepwave MAX BR1 MK2 Router w/ CAT6 LTE Advanced Modem
(Wireless Access Network and Cell Network)
WAN Interface: (1) GE, (1) Embedded LTE-A Modem
LAN Interface: (1) GE
Wi-Fi Interface: 802.11ac/a/b/g/n 2x2 MIMO Simultaneous Dual-Band, Wi-Fi WAN & AP
Router Throughput: 100Mbps
4G Bands: FDD LTE- B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41
3G Bands: WCDMA/HSPA+/DC-HSPA+ B1, B2, B3, B4, B5, B8
Recommended Users: 1-60
GPS Tracking: Built-in
SIM Slots: (2)
Cellular and GPS Antenna Connector: (2) SMA Antenna Connectors, (1) SMA GPS Antenna Connector, (2) Wi-Fi Connector
Power Input: DC Jack/Terminal Block: 10V – 30V DC
Power Consumption: 16W (Max)
Antenna: 6dbi (Not Included)

System Devices Specs

Monitor Type: 12"
Mouse Type: USB
Keyboard Type: USB
Pull-out Tray Type: Vibration

Trailer Specs

Materials: Steel
Trailer Dimensions: 10'L x 6'W (Trailer Bed) - 14'L (Tow Length)
Trailer Footprint: 14.65'L x 12.91'W
Wiring: 7-Pin Flat
Axle: 3,500lb
Suspension: 3,500 Lb 4-Leaf Double Eye Springs
Leveling Jacks: (4) 1,000 Manual Crack Leveling Jacks
Wheels: (2) 15" 5x4.5 Steel Rims
Tires: ST205/75/D15 H188
Hitch: 2" Ball Coupler
Transport Dimensions: 160.68"-L x 88"-W x 81.15"-H
Weight: +/-1500 lbs
Shipping: Common Freight
Shipping Dimensions: 14'L x 10'W x 12'H
Shipping Weight: -
Options: Length- Mounting-Fixtures/ Call Us for Special Requirements

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-

M1 Portable Security Tower provides a safe and effective way for operators to monitor locations from elevated positions up to 30'. This solar security assembly features a telescoping tower with a removable mast head for storage when not in use. Five outdoor security cameras (one PTZ camera and four bullet camera - all NDAA compliant) can be used to record images, supported by an 8TB NVR. Equipped with GPS tracking, an included router facilitates wireless access point and cell network connections (6dbi antenna not included). This unit features two 300-watt solar panels (fixed mount), 600aH capacity lithium-ion battery bank (same capacity at 1200aH AGM), 4kW backup diesel generator, 120V battery charger and 600-watt inverter.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO LIGHT MASTS OR LIGHT TOWERS

The SPLT-6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1 is a complete, portable solar-powered security system for outdoor and remote locations. This unit consists of a 30' telescoping mast with electric winch, two 300-watt solar panels, one PTZ camera, four bullet cameras, wireless router, GPS tracking, lithium-ion battery bank, backup diesel generator, battery charger, inverter and solar charge MPPT controller. All components are mounted on a single-axle trailer. This system does not come with monitoring plans.

All cameras on this system comply with the 2019 National Defense Authorization Act (NDAA). The regulation bans federal governments, their contractors and businesses with national security interests from buying and using surveillance equipment made by specific major China-based manufacturers, including Hikvision, Dahua and their OEMs. Security products sold by Honeywell, Bosch, Panasonic, ADT, Flir and many more are affected by the ban. NDAA compliance also includes a ban on ZTE, Huawei and Hytera telecommunication equipment.

Operation:

- (2) 300W solar panels w/ solar MPPT charge controller
- (15) 40aH lithium-ion batteries - 600aH total battery bank/600aH usable. This has the same capacity as a 1200aH AGM wet battery system, but with reduced weight and allows for 100% capacity instead of 50% capacity of AGM batteries.
- (1) PTZ camera - NDAA compliant, 32x zoom, 4MP
- (4) Bullet cameras - NDAA compliant, 5MP
- 8TB network video recorder configured in RAID configuration
- Router - wireless access point or cell network
- 120V battery charger
- 600W, 120V inverter
- 1-way PA system
- Blue LED strobe light
- All system components secured to a DOT-approved trailer
- Trailer comes with (4) leveling jacks and vin#

PTZ Cameras: This trailer mounted security system features four PTZ security cameras that provide operators with crisp 720p or 1080p full-HD high resolution images. A 4.7-94mm varifocal lens automatically adjusts focus, providing operators with precise 12x digital zoom and 32x optical zoom levels. Integrated long-range IR LEDs, with a wavelength measurement

of 850 nm, enable the day/night camera to see distances up to 492' under nighttime conditions. This unit offloads videos in MP4 format and features H.264 and MJPEG video compression.

The IP security camera is designed to perform in outdoor locations and rainy conditions. This IP66-rated unit resists the negative effects of non-corrosive liquids. De-fogging features enable the unit to operate in rainy and foggy conditions. This device is capable of operating in temperatures between -22°F and 149°F.

Our cameras with Power over Ethernet (PoE) features enable data transfers and power to be passed through a single Ethernet cable that is usually a Cat 3/Cat 5 cable or better. There are several types of PoE, which come with their own respective standard and maximum power to port capabilities. The IEEE 802.3af PoE standard, with a voltage range of 44.0 - 57.0V, offers 15.4W of DC power for each port. The IEEE 802.3at PoE standard, with a voltage range of 50.0 – 57.0V, provides up to 30W of DC power per port, which is ideal for surveillance cameras, antennas and network access points. The IEEE 802.3bt PoE standard, with a voltage range of 50.0 – 57.0V, provides 60W of DC power for each port. In order to utilize PoE properly, the components, such as the receiving unit and sending device, must be PoE compliant.

Bullet Camera: The security system features four fixed position bullet cameras camera. These cameras can be individually angled to cover specific areas or sides of the tower. The 5MP camera is designed to monitor the trailer and the surrounding area around the trailer.

Network Video Recorder: The solar security assembly comes with a 8TB, 8-channel network video recorder. Installation only takes minutes via plug-and-play, which automatically detects, displays and configures system components. With multiple recording modes (Schedule, Continuous, Motion Detection and Event), users could capture hours of footage with ease. The remote configurable network recorder features a bit rate of 40Mbps incoming and 80Mbps outgoing at up to 60fps per channel. The 8TB storage is configured in a RAID configuration to prevent data corruption due to drive failure. To maximize storage, the unit supports H.265, H.264, and H.264 OVC video compression. The network recorder is compatible with two-way audio streaming (camera dependent) and includes 9 ethernet ports (RJ-45 interface). During recording, the unit handles the following data: activity log, email notification, event log, event notification, video analytics and event search. This device offloads videos in MP4 format.

System Devices: The SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1 has a 12" monitor, USB mouse, USB keyboard and pull-out vibration tray. Operators can use these devices to configure the NVR recording unit or view recordings locally.

PA System: This unit features a 1-way PA system and two 50-watt speakers. We can add a two-way system upon request and with additional cost.

Router/Wireless 4G Hotspot: Operators can connect to wireless access points or cellular networks via a professional-grade router. The unit supports WAN, LAN and Wi-Fi interfaces with 100Mbps throughput capabilities. Recommended for 1-60 users, this device works with all major carriers (CDMA/GSM/LTE). The access point can be disabled for security purposes upon request. Customers must provide a 6dbi antenna for the system (not included).

GPS Tracking: The router is equipped with built-in GPS fleet tracking. This feature enables operators to monitor the location of the solar-powered system easily. Cloud-based management tools enable access to the wireless network from compatible devices.

LED Strobe: The SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ-4XFE-8TB-W4G-M1 comes with a blue security LED strobe light. We can add a red or white LED strobe light at an additional cost (combination of colors is also possible).



[Click Photo to Enlarge](#)

Surveillance Tower: This five-stage steel mast from Larson Electronics is designed to allow operators to quickly and safely deploy equipment in locations where it must be elevated to heights up to 30' for effective coverage. This light boom can be extended to 30 feet for maximum area coverage and collapsed for applications where a smaller footprint is required. In a collapsed position, the tower is towable on roads and is capable of clearing standard bridges. The mast extends to its full height using an included electric winch.

A 44" wide and 2" by 2" by 1/4" thick mounting plate is attached to the upper section of the mast which provides a strong and stable platform for the equipment. The LM series of towers are powder coated with glossy blue finish for corrosion resistance and aesthetics.

The LM family of telescoping towers feature a proprietary mast guidance system, which provide increased stability during high winds. Four 1,000 lbs hand crank leveling jacks are used for leveling. The jacks can be leveled by hand crank or attachment provided for power drills. These components can be extended 2' out from the side of the trailer for added stability. When collapsed, the mast can withstand winds up to 125 mph. Custom builds can be provided for higher wind speed resistance when fully raised.



[Click Photo to Enlarge](#)

Solar Panel Assembly: This unit is comprised of two 300-watt solar panels, generating a total maximum output of 0.6 KW. The panels are mounted to a stationary assembly. The panels are wired to the solar charger control box which manages the charging system. The solar panels

are mounted to a frame angled at 45° to capture the intensity of the sun for optimized light intake.

Batteries: The solar unit contains a battery bank that consists of fifteen, 40aH lithium-ion batteries for a 600aH battery bank (600aH usable). Compared to conventional SLA batteries, these units are 100% usable and lighter in weight. Over time, this results in lower operating and maintenance costs. An included battery level indicator that provides real-time power monitoring for the battery bank.

Solar Charge Controller: The solar-powered system features a 40A MPPT solar charge controller.

Battery Charger: This system comes with a 120V battery charger, which can be plugged into a local wall outlet during use, such as prior to deployment or when local power is available at the remote site. We can add a 220V or 240V battery charger to power additional equipment from the solar tower at an additional cost (portable battery chargers are also available).

Inverter: This unit comes with a 600-watt inverter, which operates on 120V.

Backup Generator: This unit comes with a 4kw backup diesel generator with a 30-gallon fuel tank. We offer models with gasoline, LPG/LNG or diesel backup gensets (may come with additional costs). An autostart feature automatically activates the backup generator when the battery bank reaches below 30% capacity. For systems with battery chargers and backup generators, the battery charger is connected to the genset by default. It is possible to unplug the battery charger from the generator for local charging.

Component Control Center: All the electrical components are encapsulated in a NEMA 3R job box that is bolted to the trailer. Since most of these components are not rated for high heat, our component cooling system circulates air within the job box at 1400 CFM when the ambient temperature exceeds 90 degrees Fahrenheit. The job box that contains the component control system includes locks for security purposes.

Trailer Assembly: The entire assembly is mounted to a 10' (trailer length) x 10' (trailer bed) x 14' (tow length), single axle trailer via six 1/2" anchor bolts. Trailer length refers to the measurement from the hitch to the rear bumper. The trailer bed refers to deck space that holds system components and equipment (not including tires, hitch, bumper and external trailer components). This two-wheel trailer is equipped with 3,500 lbs axle and leaf springs with 15" trailer tires. A standard 2" ball coupling, two standard safety chains, and 7-pin flat trailer plug allow for easy hookup and towing. The trailer tongue can be folded up for seamless storage. A rugged and waterproof job box is included, safely secured to the trailer. Leveling jacks on the trailer allow operators to level the trailer, and provide stabilization during deployment. All trailer lighting complies with DOT/FMVSS regulations.


Outriggers vs Leveling Jacks: The solar-powered system features manual-crank leveling jacks. Outriggers help expand the surface area for large equipment or loads. This differs from leveling jacks that are used to stabilize or level systems. Leveling jacks can be mounted to outrigger legs (or the side of the trailer).

Applications: Live events, law enforcement, military, commercial, industrial facilities, outdoor

surveillance, remote locations and more.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.


8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						08-21-2024
SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ -4XFE-8TB-W4G-M1							
							
8	7	6	5	4	3	2	1

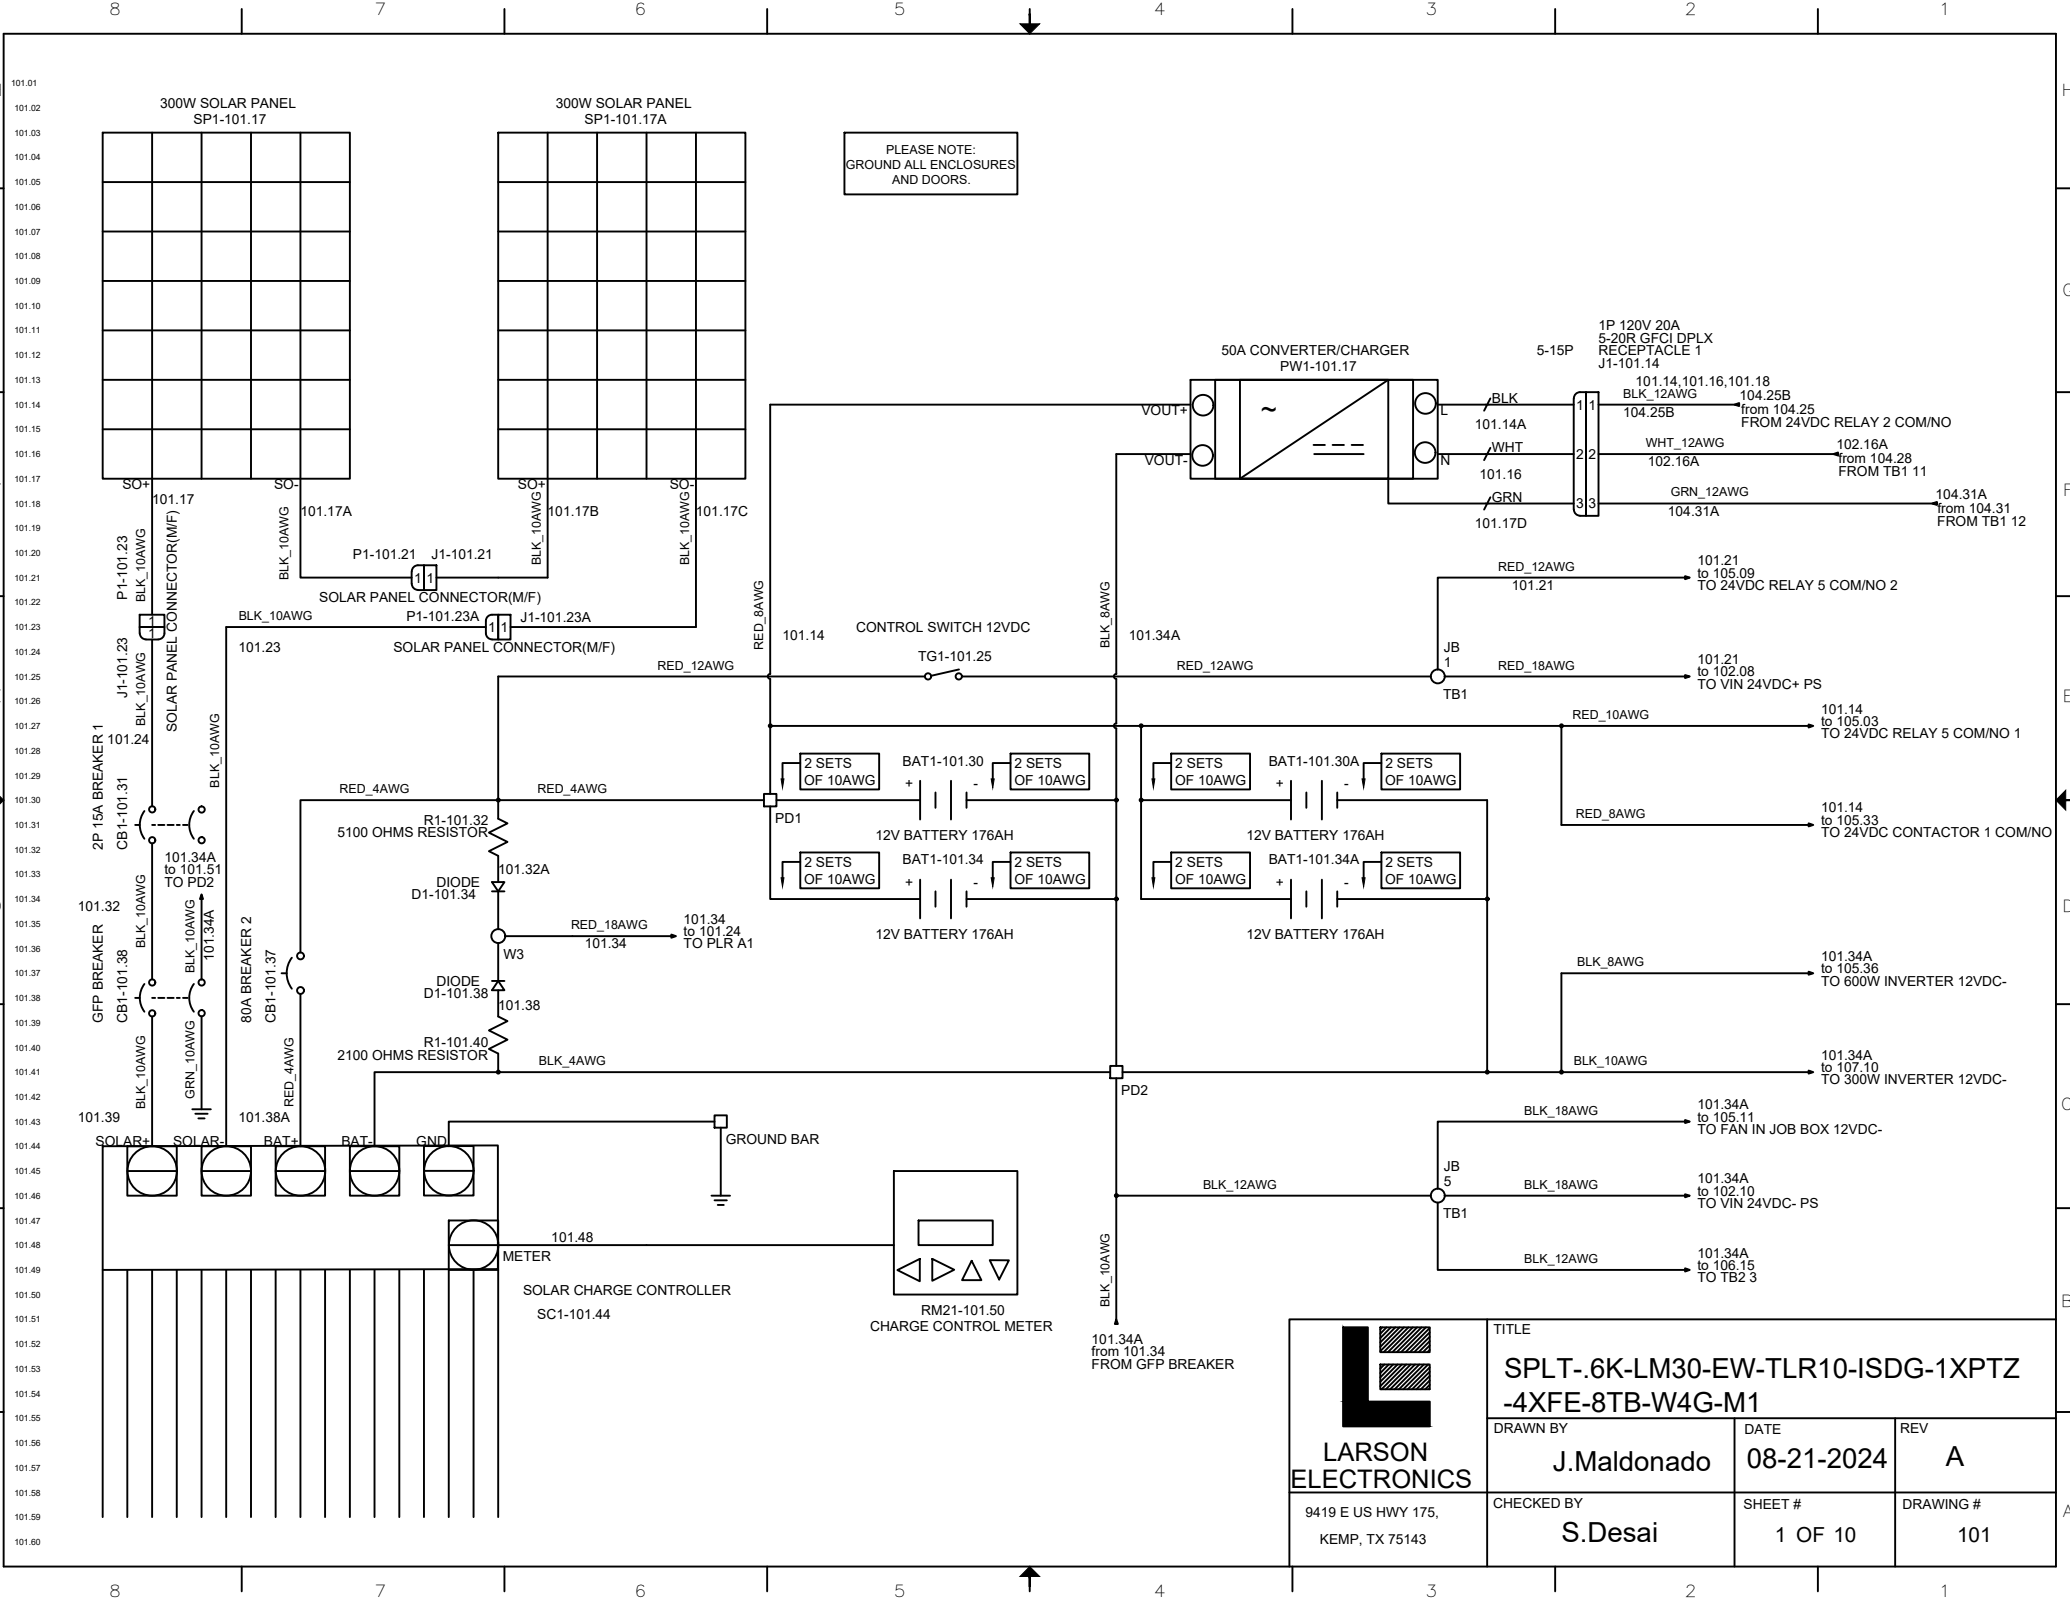


PLEASE NOTE:
GROUND ALL ENCLOSURES
AND DOORS.


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ -4XFE-8TB-W4G-M1		
	DRAWN BY J.Maldonado	DATE 08-21-2024	REV A
	CHECKED BY S.Desai	SHEET # 1 OF 10	DRAWING # 101

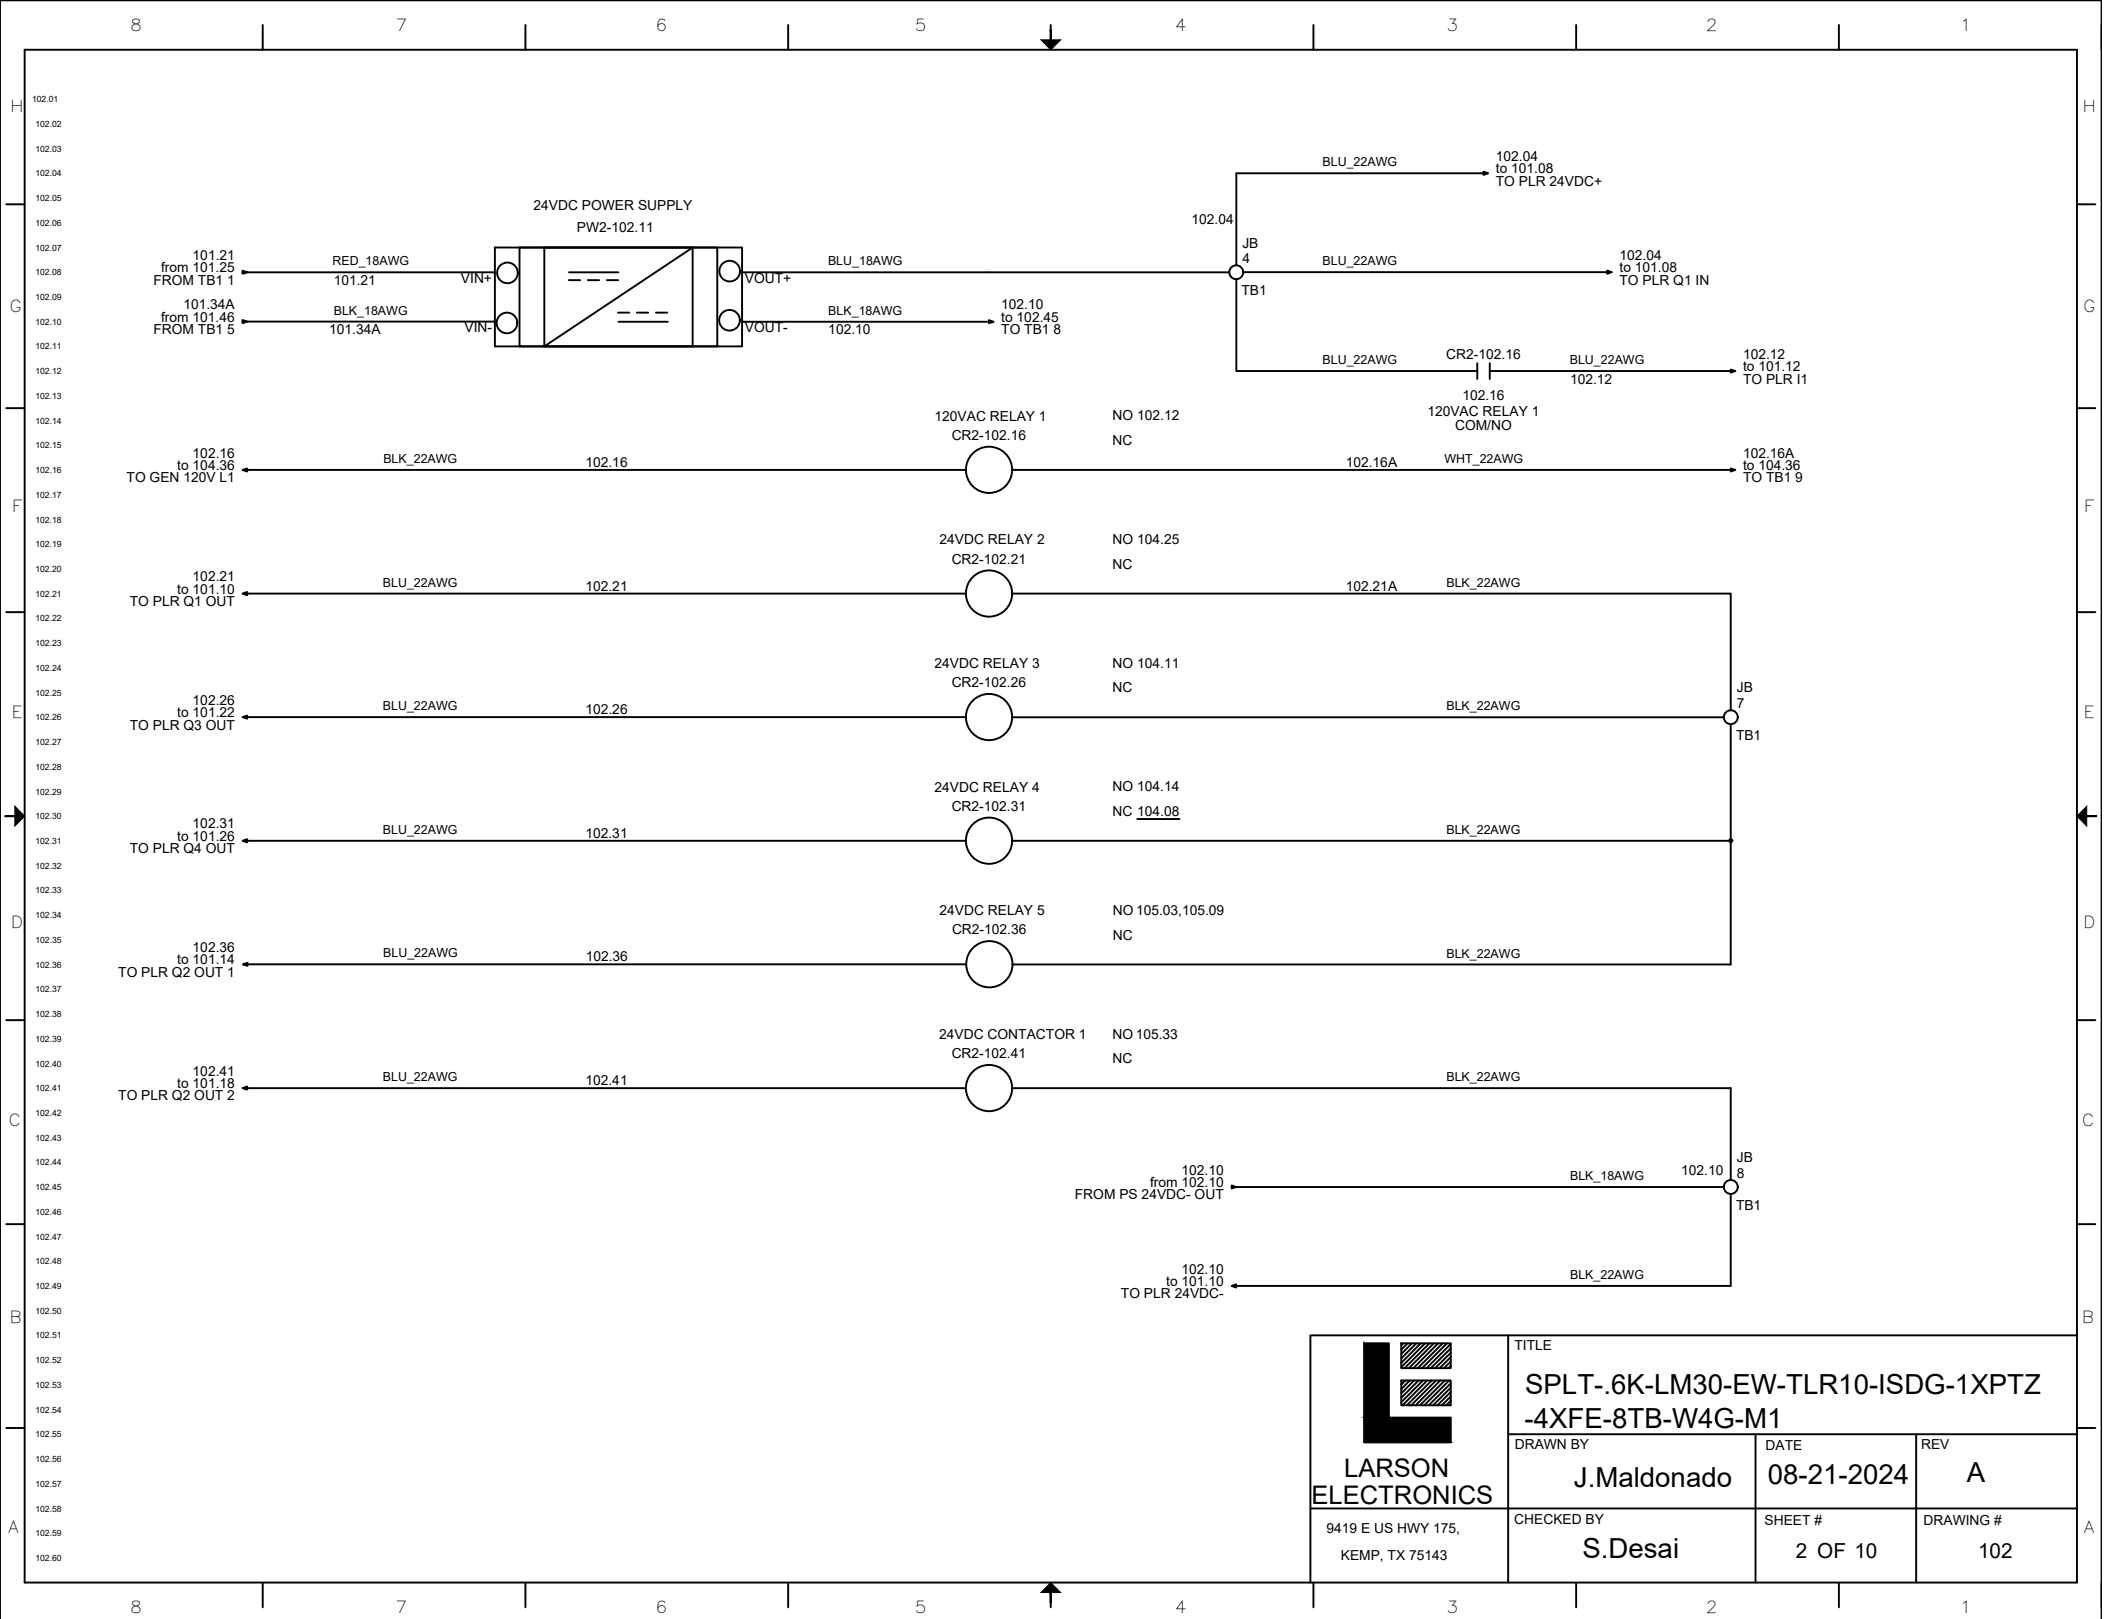


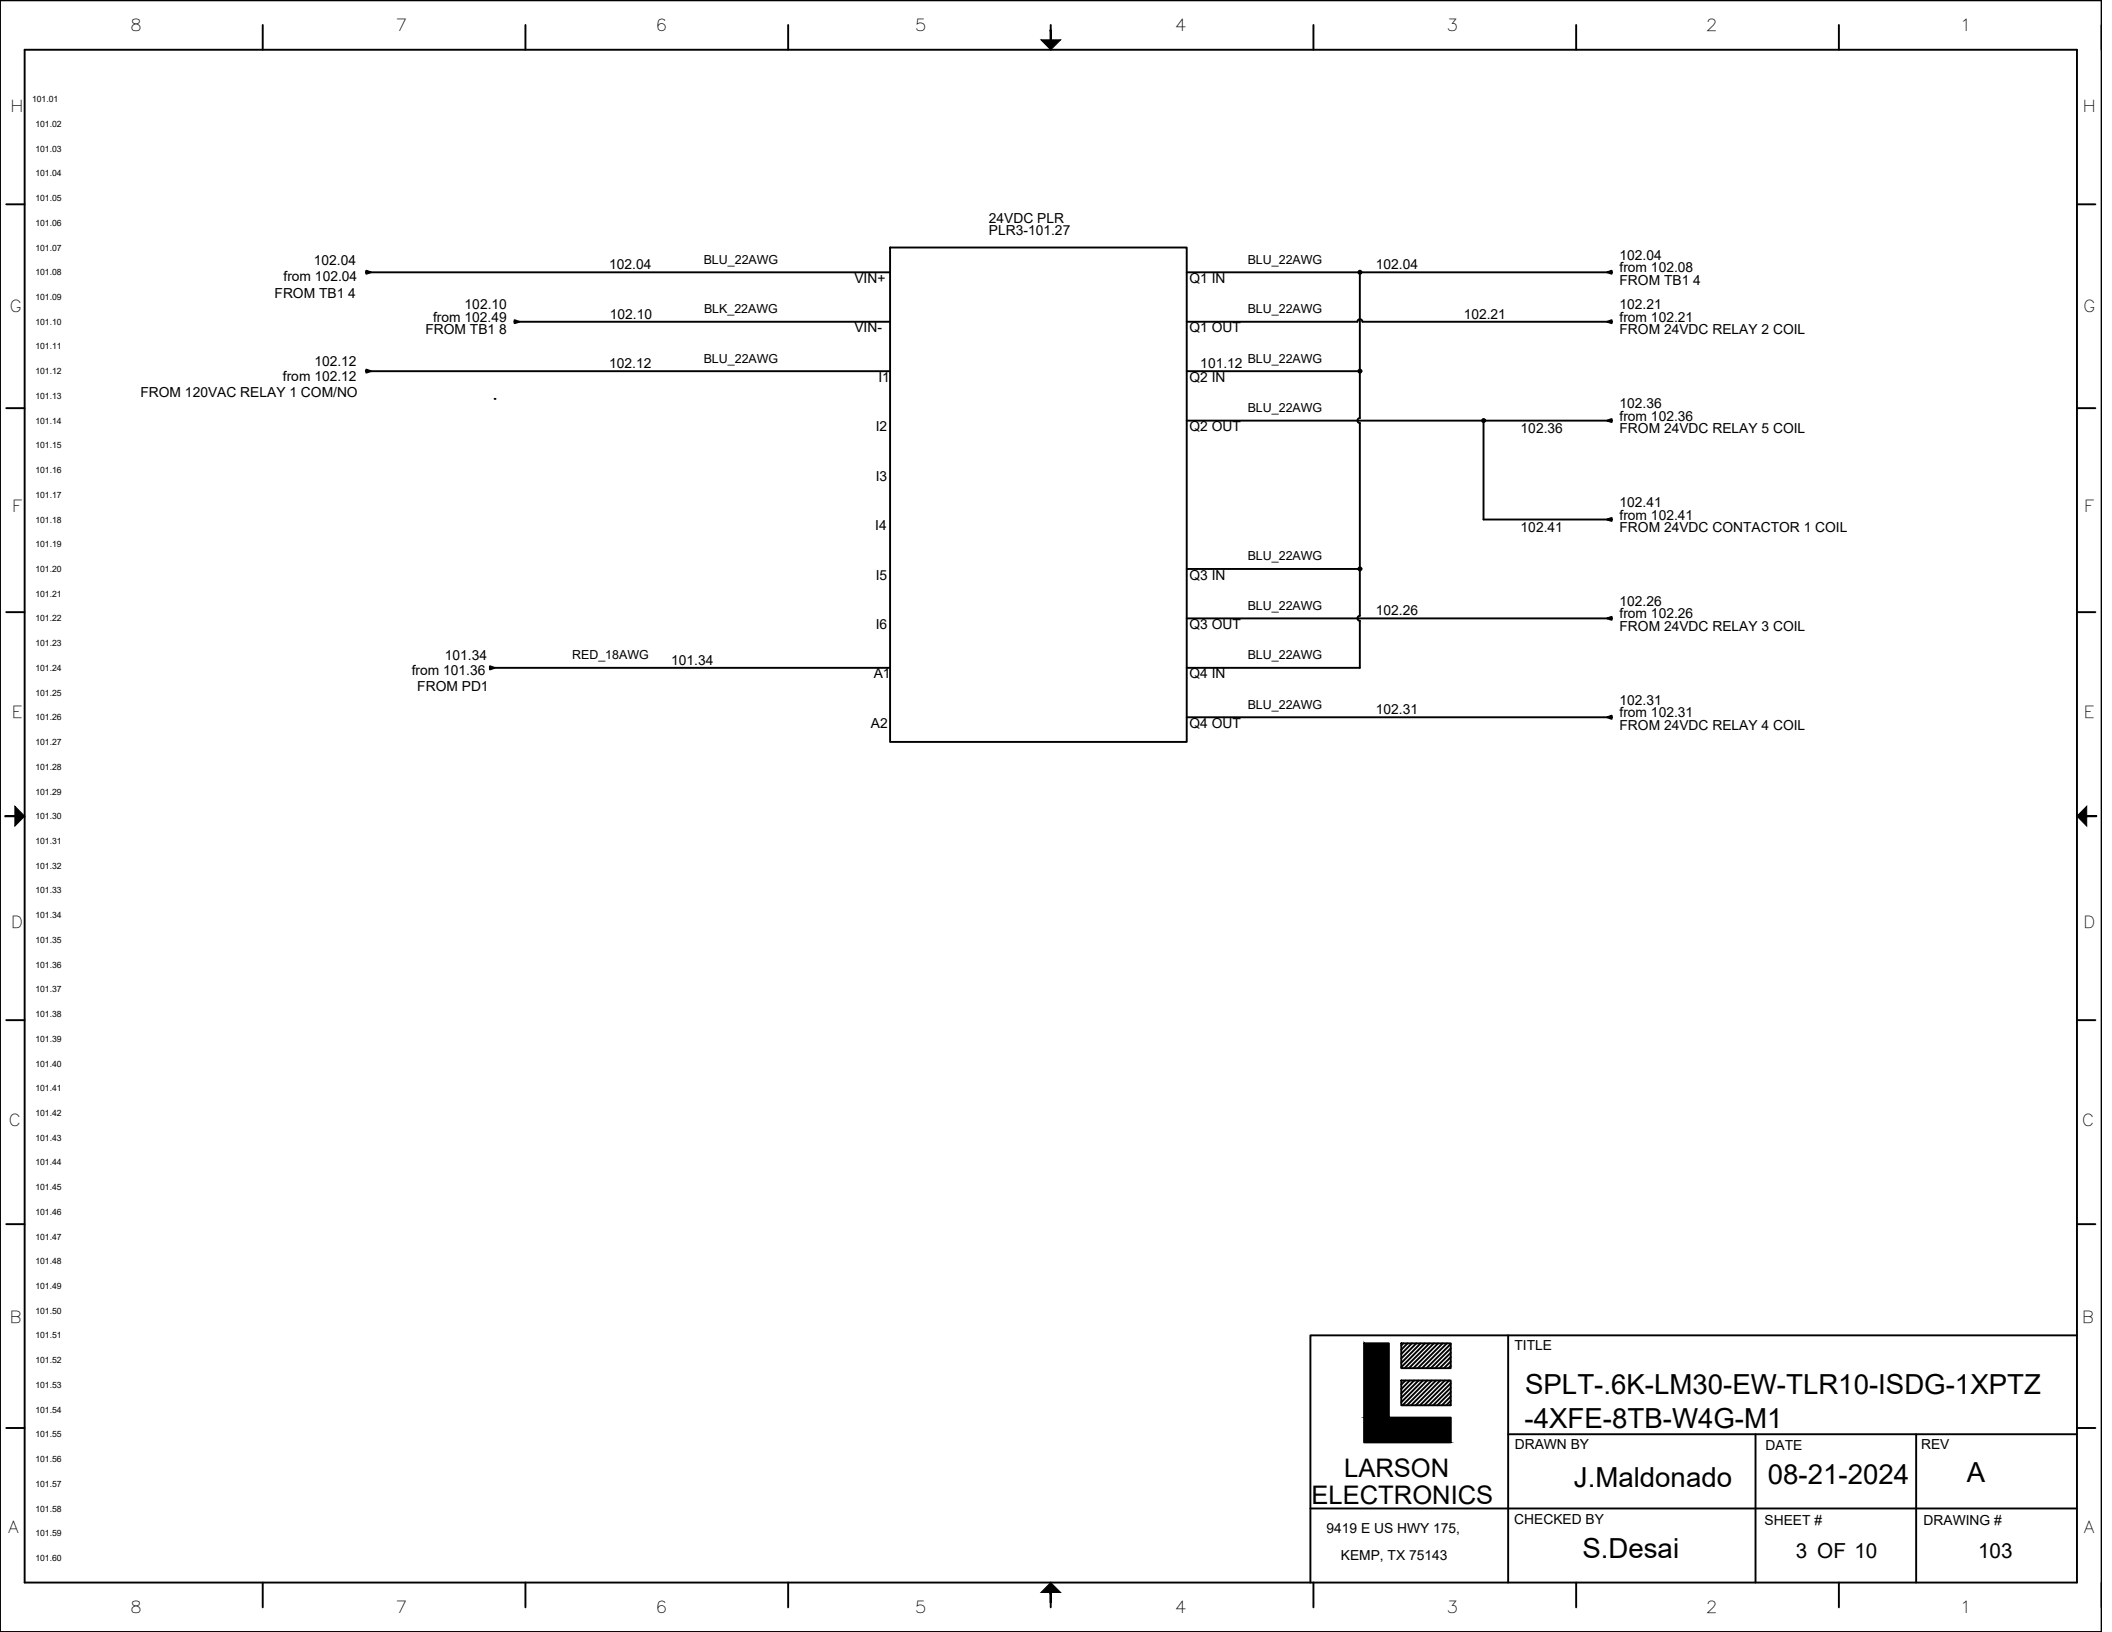


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ -4XFE-8TB-W4G-M1		
	DRAWN BY J.Maldonado	DATE 08-21-2024	REV A
	CHECKED BY S.Desai	SHEET # 3 OF 10	DRAWING # 103

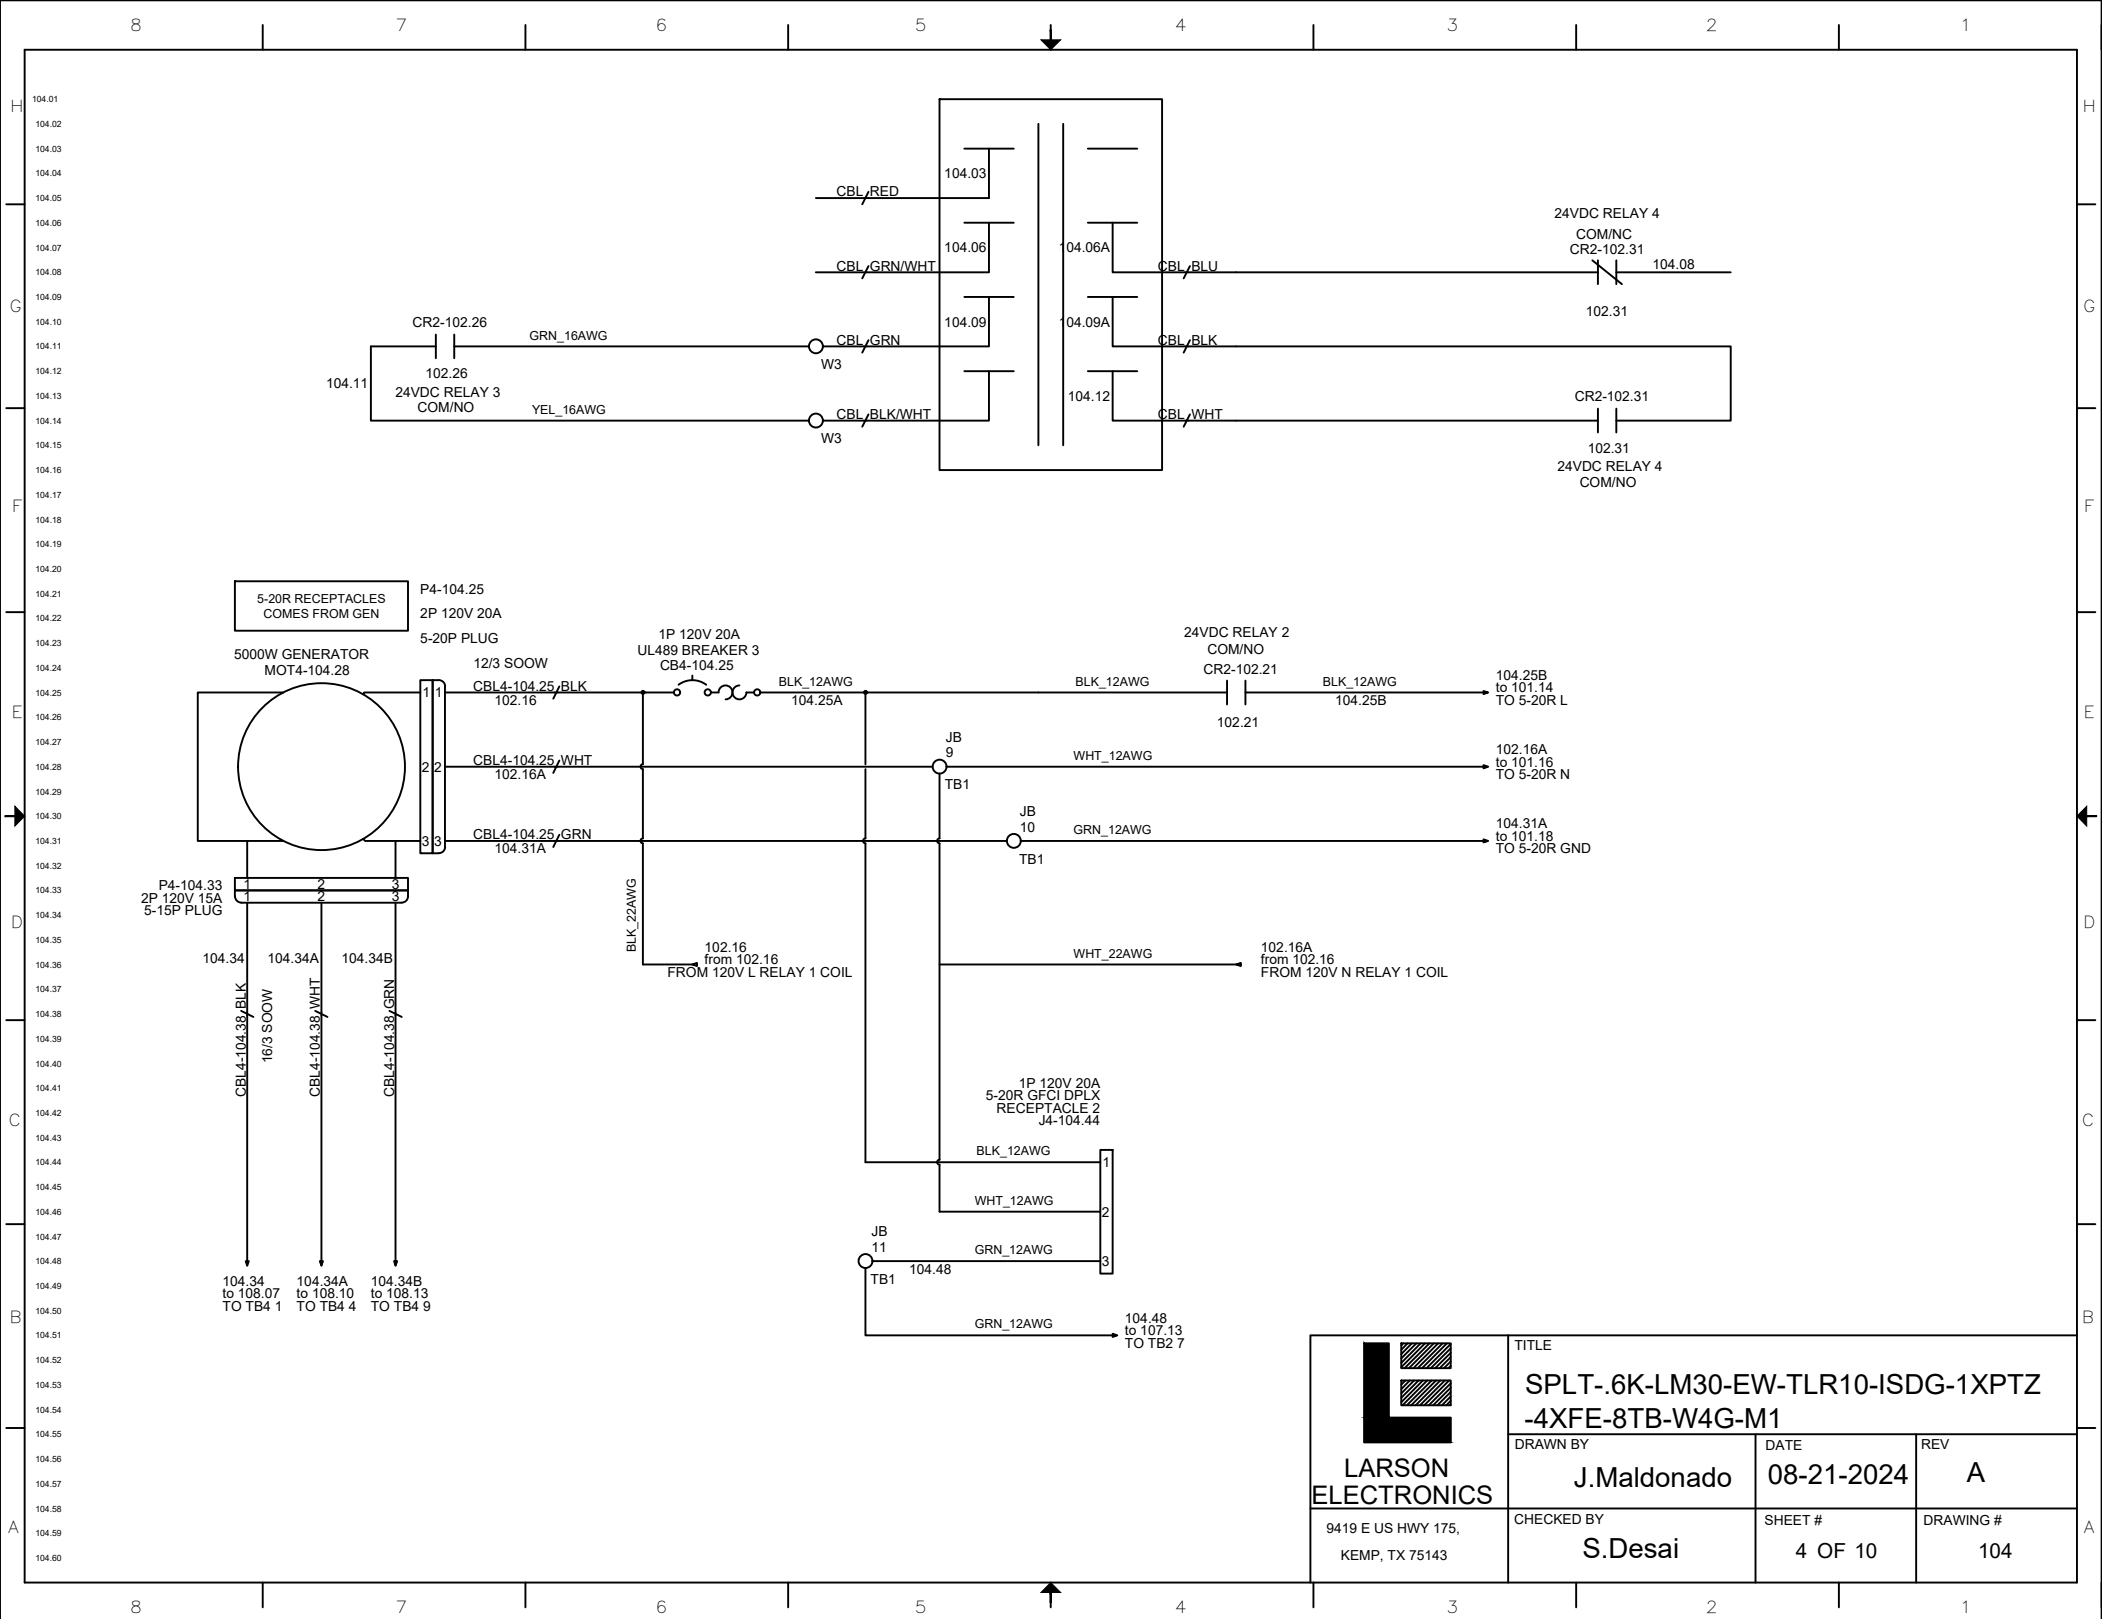

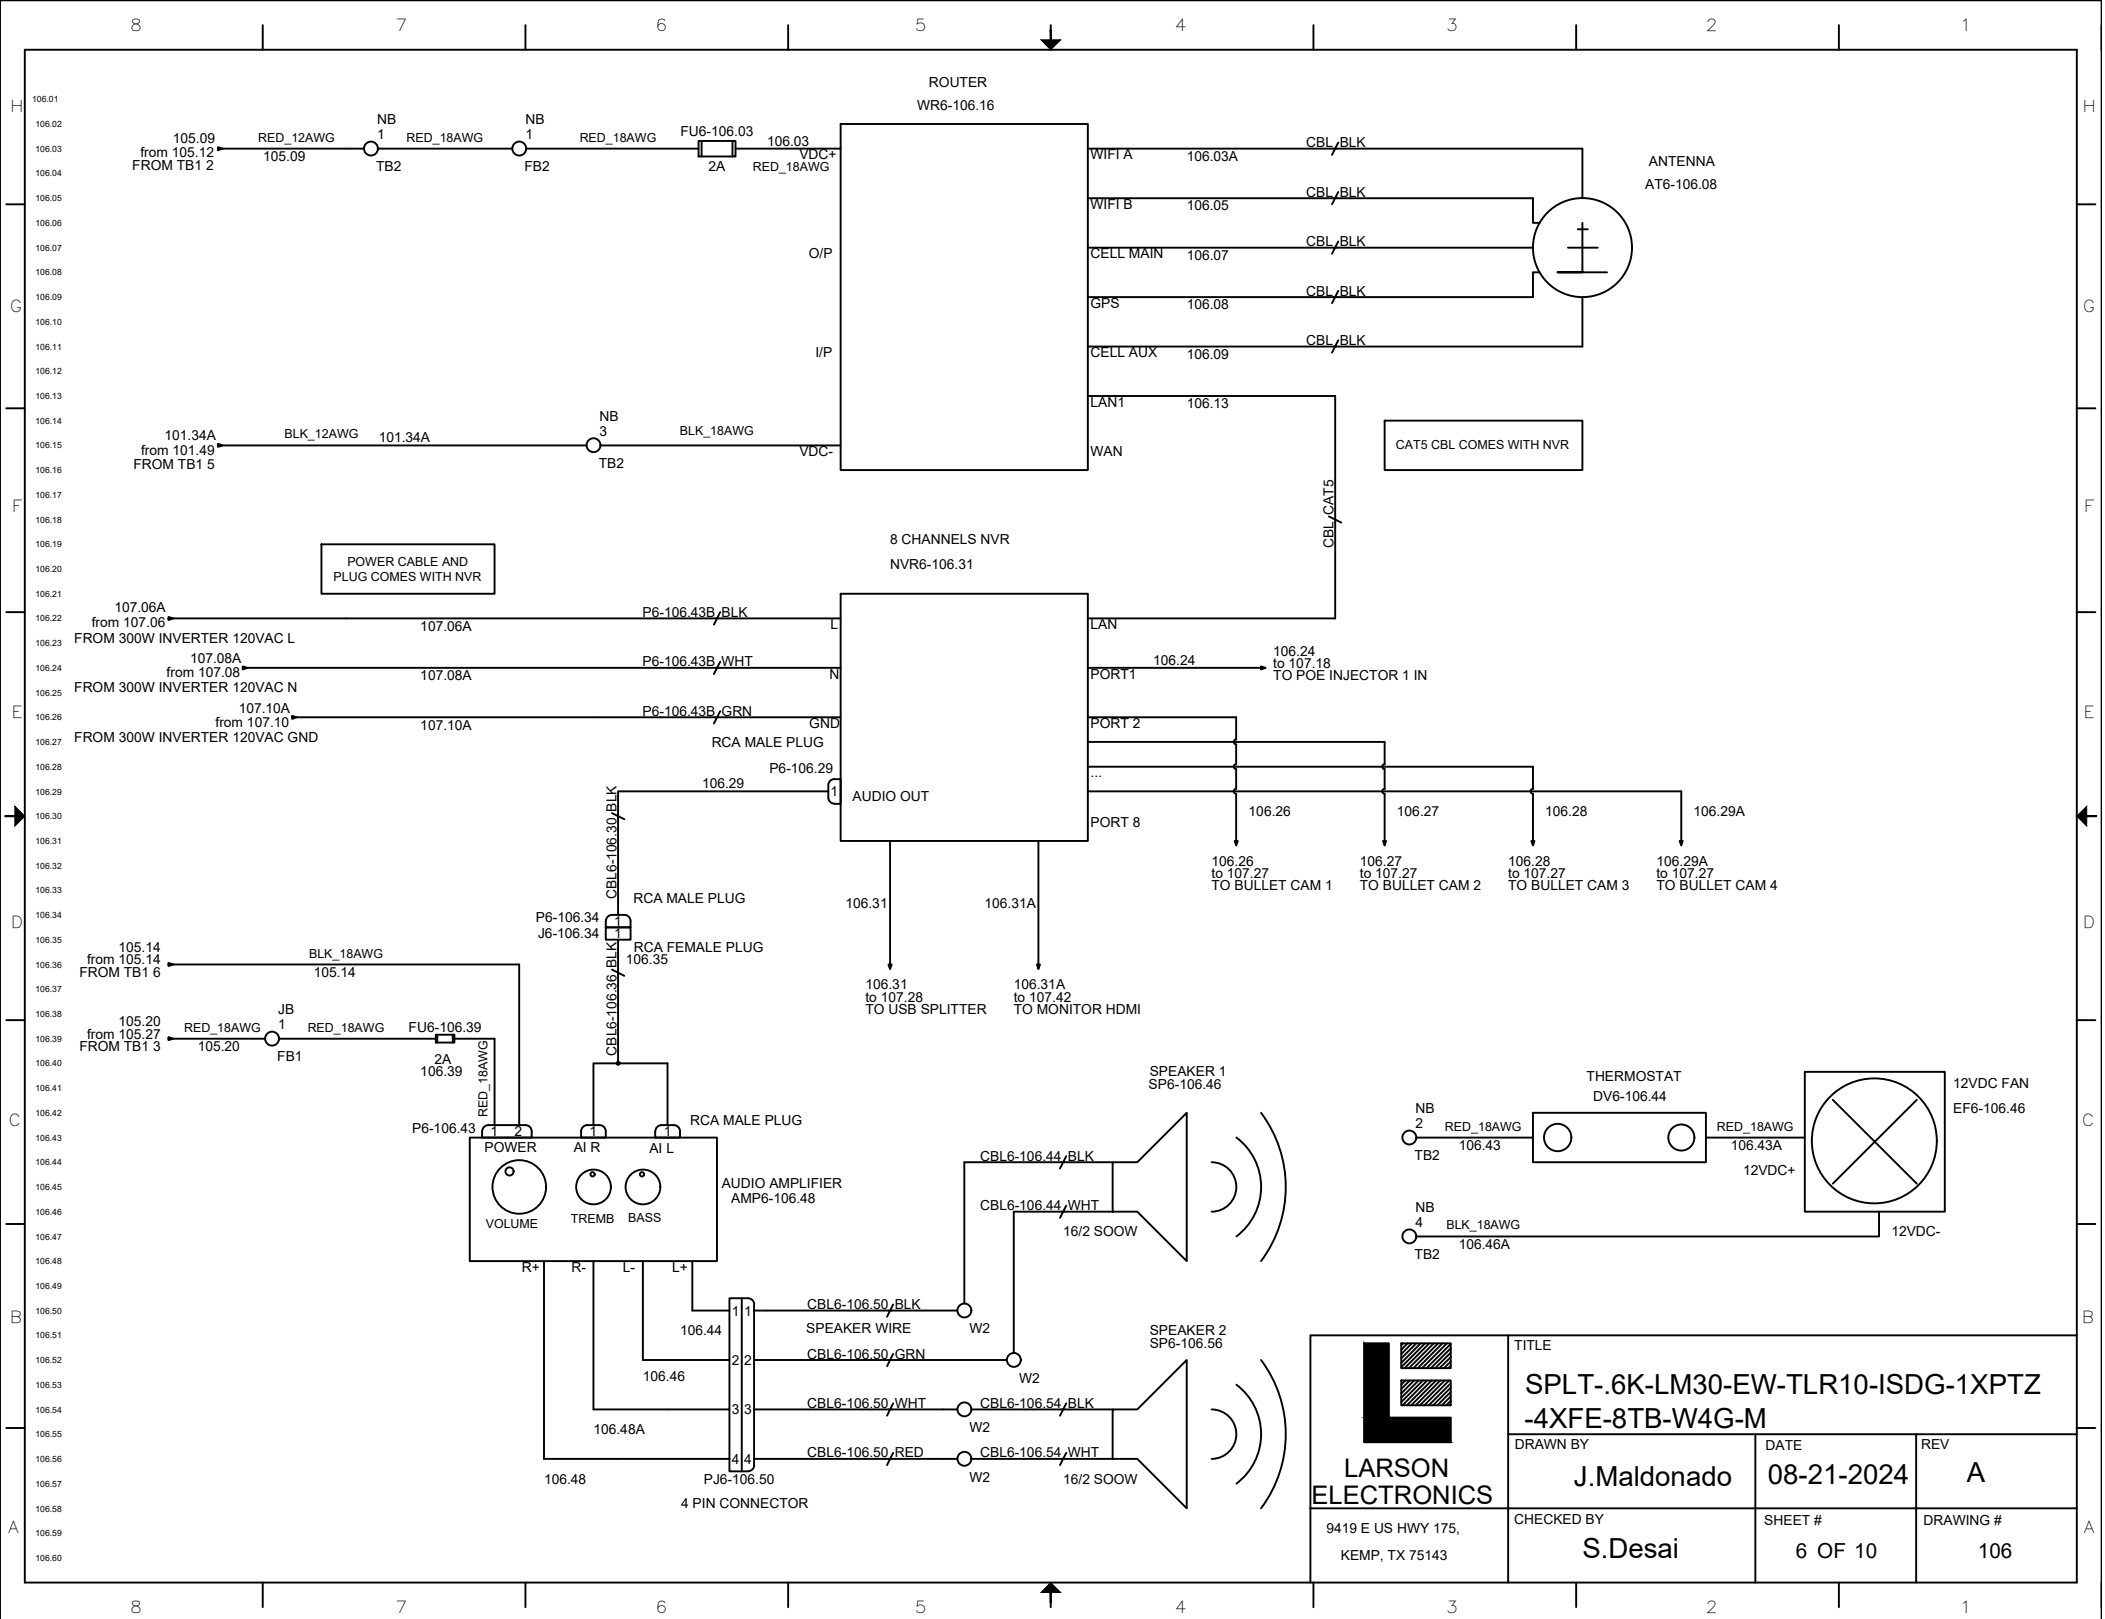

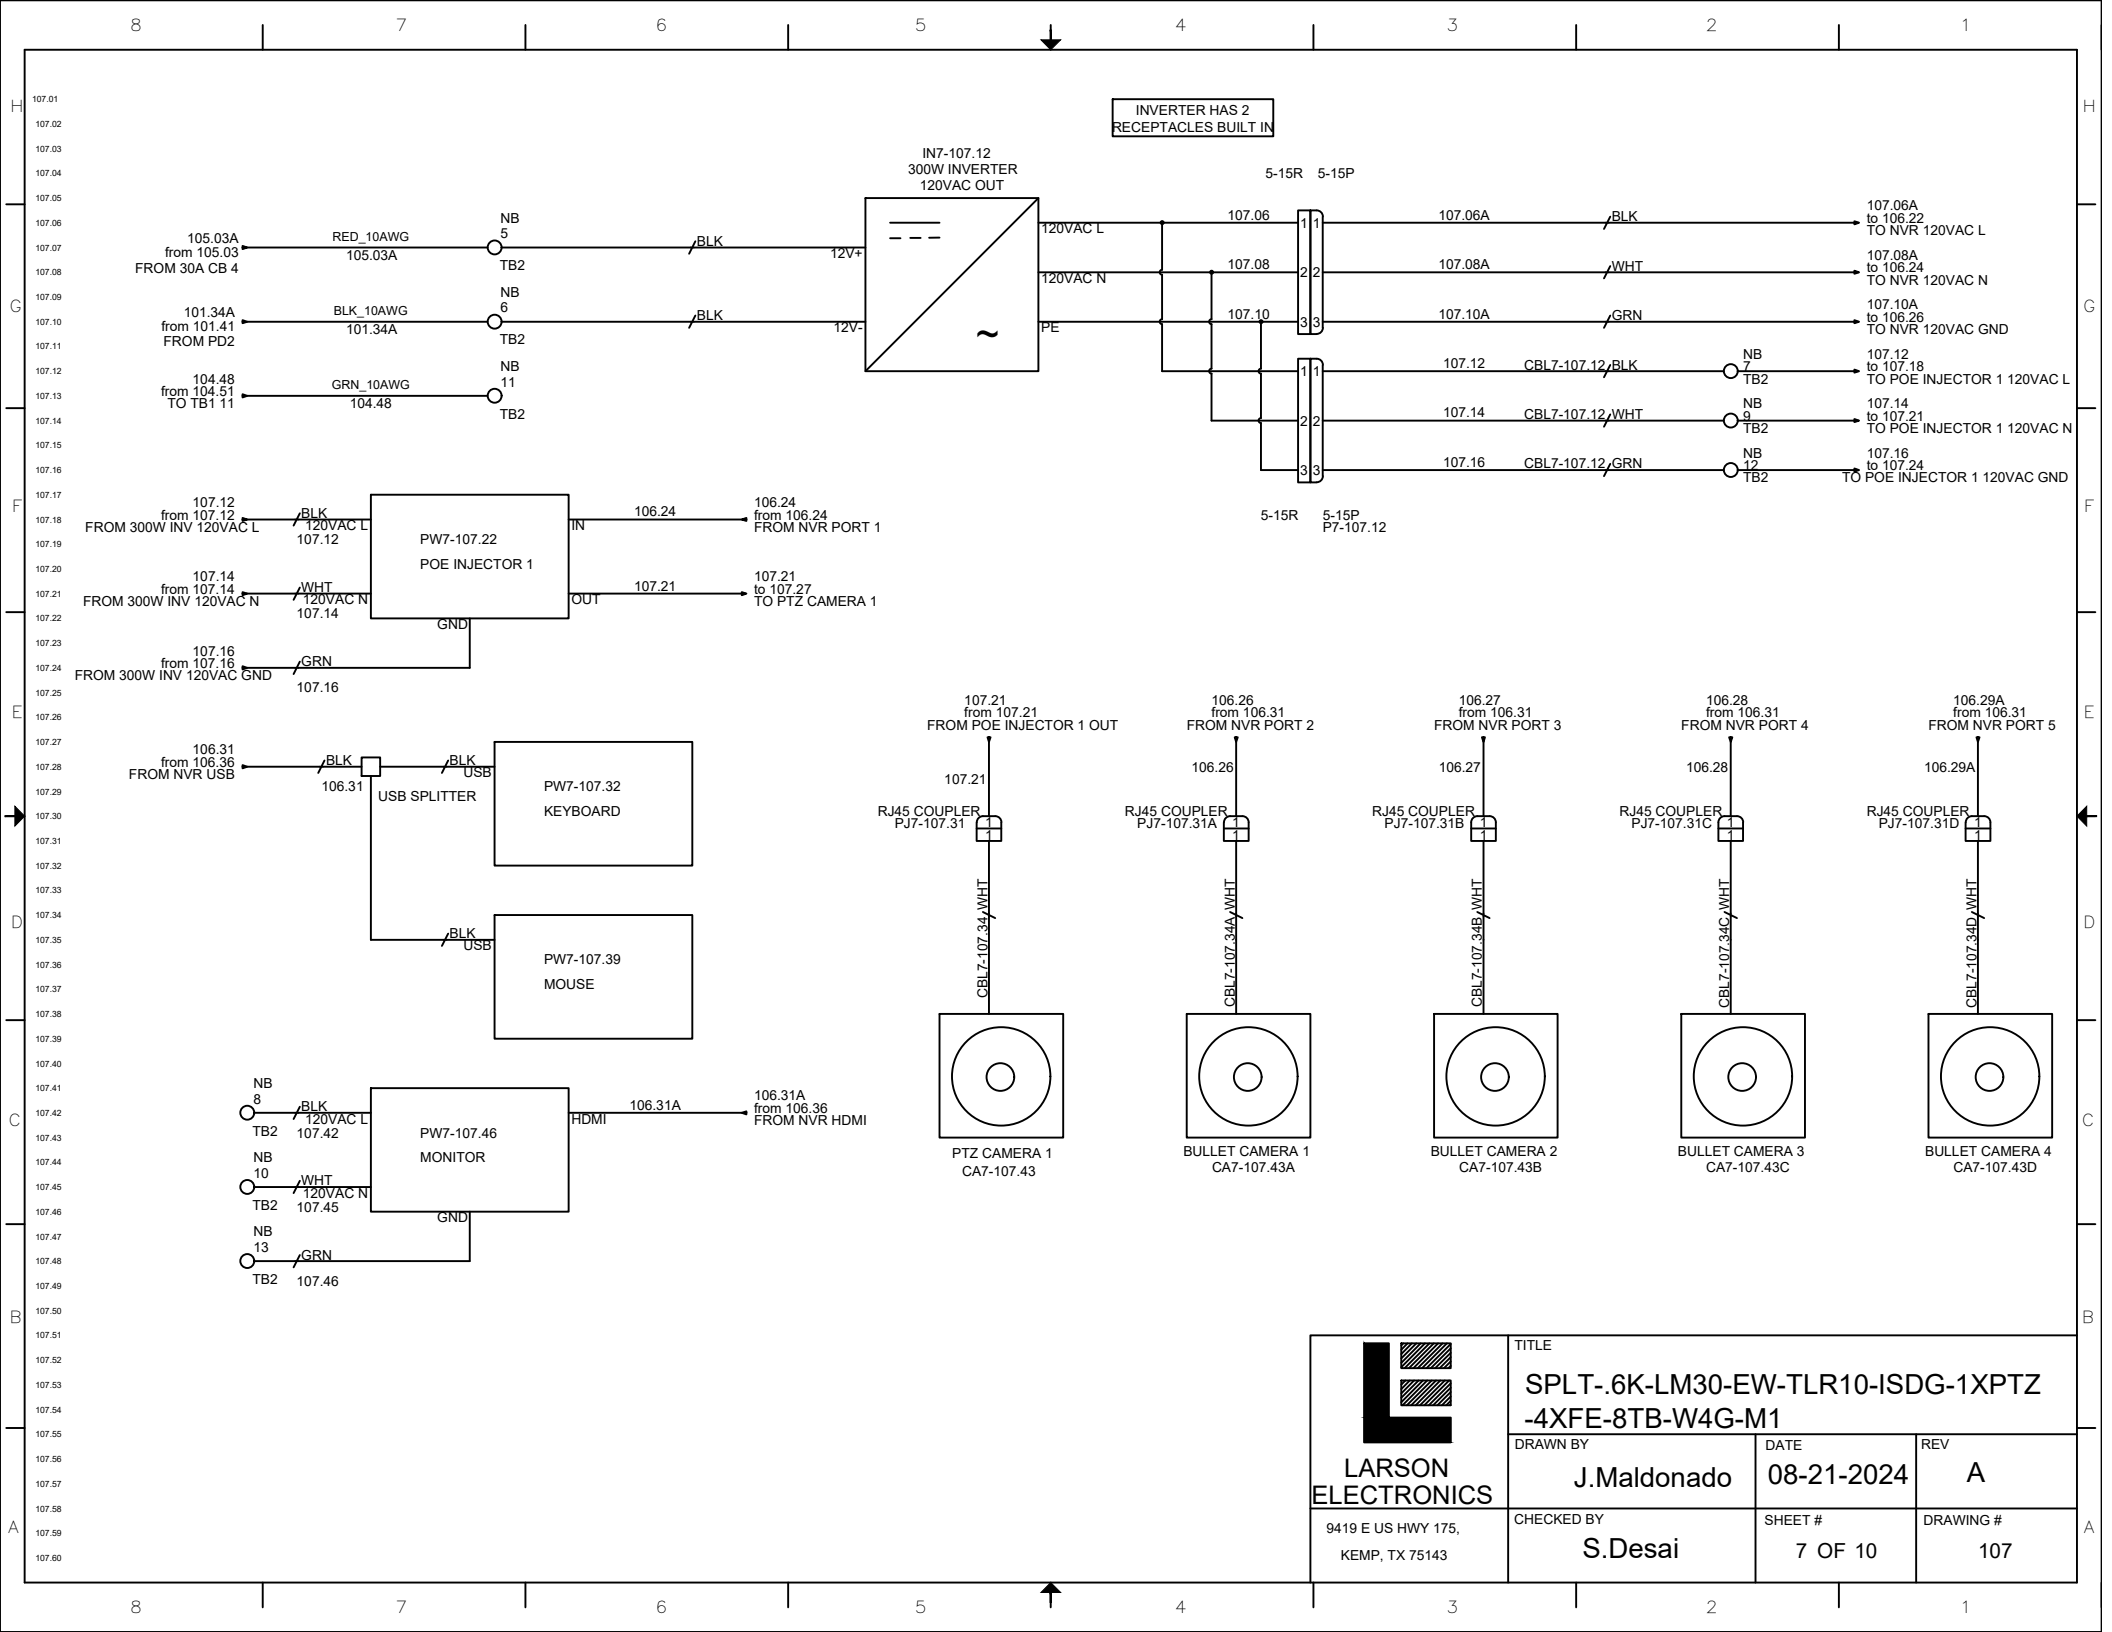

 LARSON ELECTRONICS	TITLE SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ -4XFE-8TB-W4G-M1		
	DRAWN BY J.Maldonado	DATE 08-21-2024	REV A
	CHECKED BY S.Desai	SHEET # 7 OF 10	DRAWING # 107
	9419 E US HWY 175, KEMP, TX 75143		

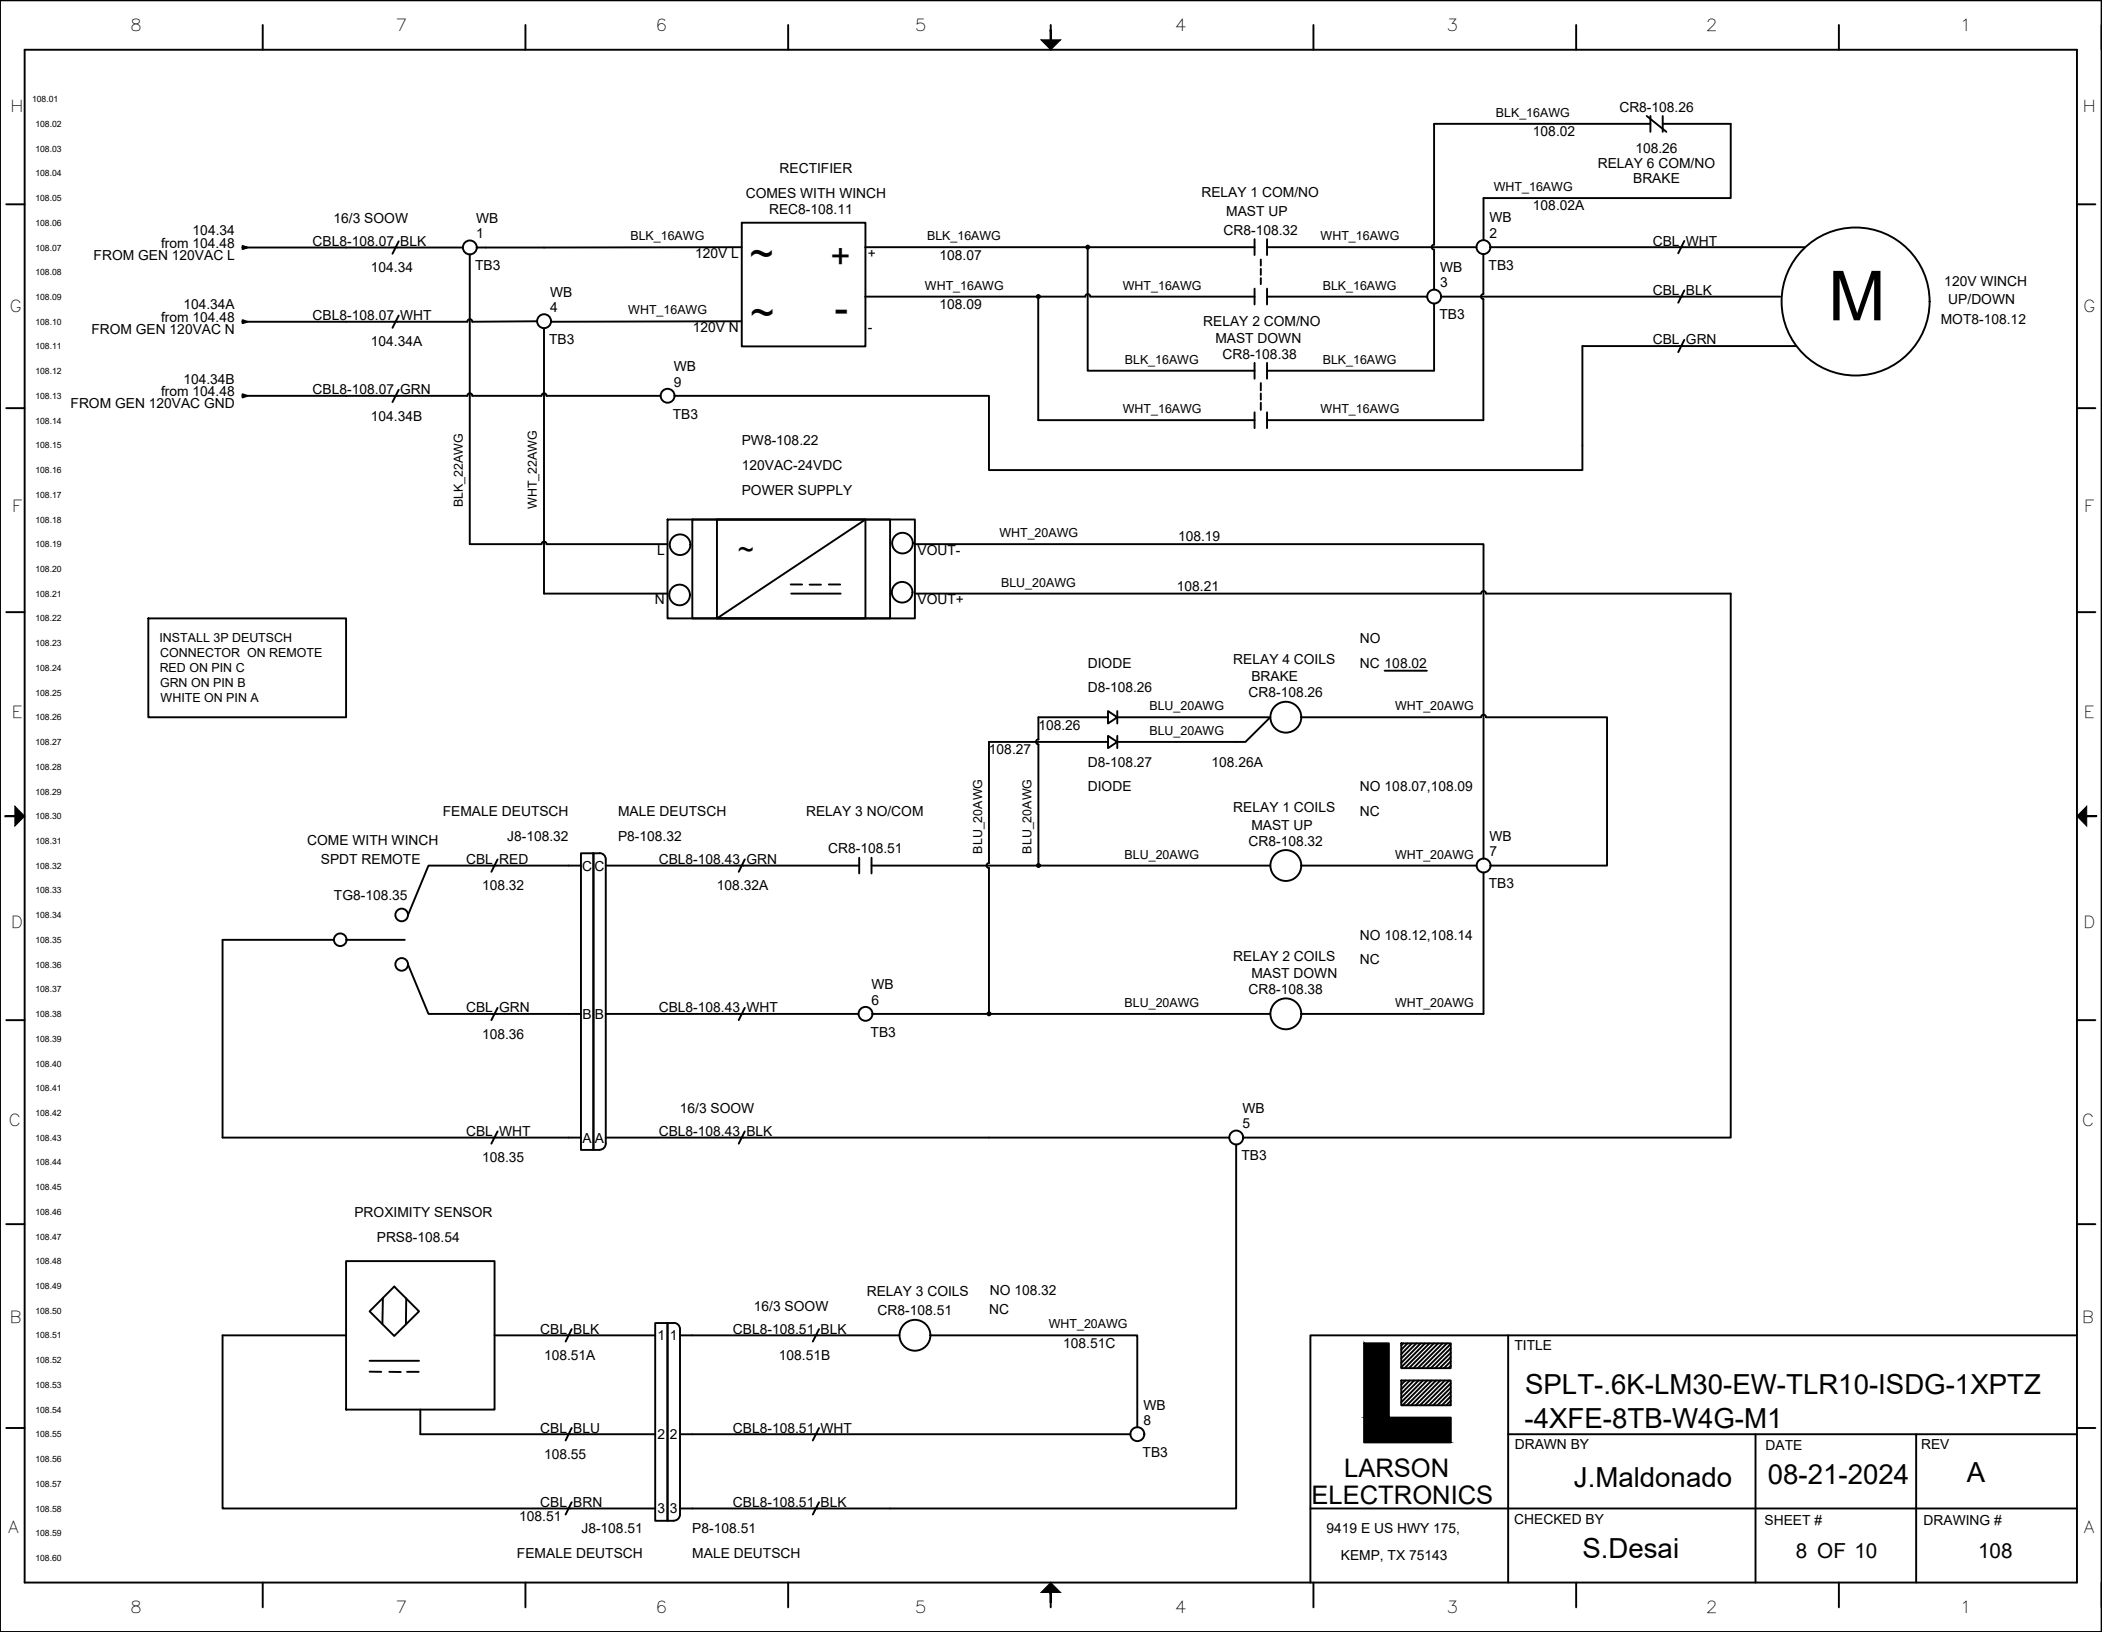

 LARSON ELECTRONICS	TITLE SPLT-.6K-LM30-EW-TLR10-ISDG-1XPTZ -4XFE-8TB-W4G-M1		
	DRAWN BY J.Maldonado	DATE 08-21-2024	REV A
	CHECKED BY S.Desai	SHEET # 8 OF 10	DRAWING # 108
	9419 E US HWY 175, KEMP, TX 75143		

[illegible]



Frequently Asked Questions (FAQ)

There are no Faqs