

MPD-EB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R

Power Distribution Panel - 208/120V AC Wye, 3-phase - 150A MB Panel - (15) Breakers - Left Side Hinged Door

Product ID: 276948



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-EB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R Power Distribution Panel

Line-in Cord: Not Included - Requires Minimum Use Wiring 150A Rated Cu @ [600V]
(**Customer Provided**)

Line-in Cord Cap: Not Included - Requires Minimum Use Device 150A @ [208Y/120V]
(**Customer Provided**)

Primary Voltage: 208/120V AC Wye

Primary Phase: 3-phase

Primary Frequency: 60 Hz

Panel: 208Y/120V 3PH 150A MCCB Hinged 30Ckt. N3R

Primary Breakers: (1) 50A 3P MCB [250V], (4) 30A 3P MCB [250V], (1) 30A 2P MCB [250V], (4) 20A 2P MCB [250V], (5) 20A 1P MCB [125V]

Primary Protection: MCCB Circuit Breaker; MCB Circuit Breakers

Transformer: N/A

Secondary Breakers: N/A

Secondary Protection: N/A

Circuits: -

Feed Type: Bottom

Top Entry: -

Interrupting Rating: 14

Operating Temperature: 40°C

Materials: Steel, Copper

Bus Material: Copper

Ground Bar Material: Aluminum (Bolted)

Panel Finish: High-strength TGIC Polyester Powder Coated Blue

Form Factor: Blue Powder Coated N3R Hinged Enclosure - Left Side Hinged Door

Ratings

Max Primary OCP: 150A @ 208V

NEMA 3R

Left Side Hinged Door

NRTL Certified to UL 489 Rated MCCB Breaker for Main Breaker

NRTL Certified to UL 489 Rated 50A and 30A Din Rail Breakers

NRTL Certified to UL 1077 Rated 20A Din Rail Mount Breakers

Made in the USA

Powder Coat Finish Standards:

Complies with ASTM D-523

Complies with ASTM D-3359

Complies with ASTM D-522

Complies with ASTM D-3363

Complies with ASTM D-2794

Special Orders - Requirements

Contact us for special requirements

Input Wire Size: -

Internal Dimensions: -

Weight: -

Mounting: Surface Mount

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electric Code section 250

The Larson Electronics MPD-EB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R Power Distribution Panel is designed for reliable, safe and convenient power distribution at industrial work sites. This 150-amp unit provides three-phase 208/120V AC Wye via a main circuit breaker panel. The power distribution panel provides operators the ability to safely tap into and distribute 208/120V AC Wye power from a variety of sources including generators and direct grid power. The MPD-EB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R has a left side hinged panel.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

The MPD-EB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R power distribution panel provides a safe and reliable way for operators in industrial settings to tap into and utilize power sources independently of the work area. The MPD series of power distribution panels require operators to provide their own line-in cables for use. Knockouts located at the bottom of the unit are provided for convenient installation of operator-provided input and output cables.

The panel is designed to operate with three-phase 208/120V AC Wye voltage. Power distribution for this panel runs 208/120V AC Wye through a 150-amp main circuit breaker panel. The NEMA 3R 150-amp 208Y/120V main breaker panel is protected by a 150-amp NRTL certified to UL 489 rated MCCB breaker and contains one 50-amp 3-pole 250V main circuit breaker, four 30-amp 3-pole 250V main circuit breakers, one 30-amp 2-pole 250V main circuit breaker, four 20-amp 2-pole 250V main circuit breakers and five 20-amp 1-pole 125V main circuit breakers. The 50-amp and 30-amp din rail breakers are NRTL certified to UL 489 rated and the 20-amp din rail mount breakers are NRTL certified to UL 1077 rated.

Enclosure Design: This power distribution system is housed in a space-saving enclosure and carries a NEMA 3R rating for protection against debris and ingress of water (dripping or minimal splashing) in indoor locations. A left side hinged door offers access to internal system components.

The power distribution system is constructed of steel with a polyester powder coated blue finish for durability against dirt, moisture and mild corrosion. This special coating creates a high-strength barrier for protection from accidental bumps and scratches. The TGIC polyester powder coat finish offers reliable resistance against chemicals, UV light (sun light) and degrading elements in outdoor locations. Our powder coating solution ensures robust color retention for many years without fading. Custom colors, such as blue (standard), black, desert tan or forest green, and galvanized finishes are available upon request. Non-standard powder coat colors or galvanized finishes may increase price and lead times.

We also offer similar power distribution panels on dolly carts with wheels, powder coated cube frames with lifting eyelets/skid pockets or stand-alone with handles for faster turnarounds and completion of temporary tasks.

Certification: All units are built in accordance to NFPA 70 (National Electric Code). All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.


Grounding: Transformer is grounded to the frame and we provide a grounding lug on the frame for the earth ground.

~Please check all motor loads for dual rated motors that will work 208 or 240.~

Applications: This power distribution system is NEMA 3R rated and ideal for indoor/outdoor use and applications including but not limited to; construction

sites, plant maintenance, plant turnarounds, hazardous location operations, shows, exhibits, and shipyard operations.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

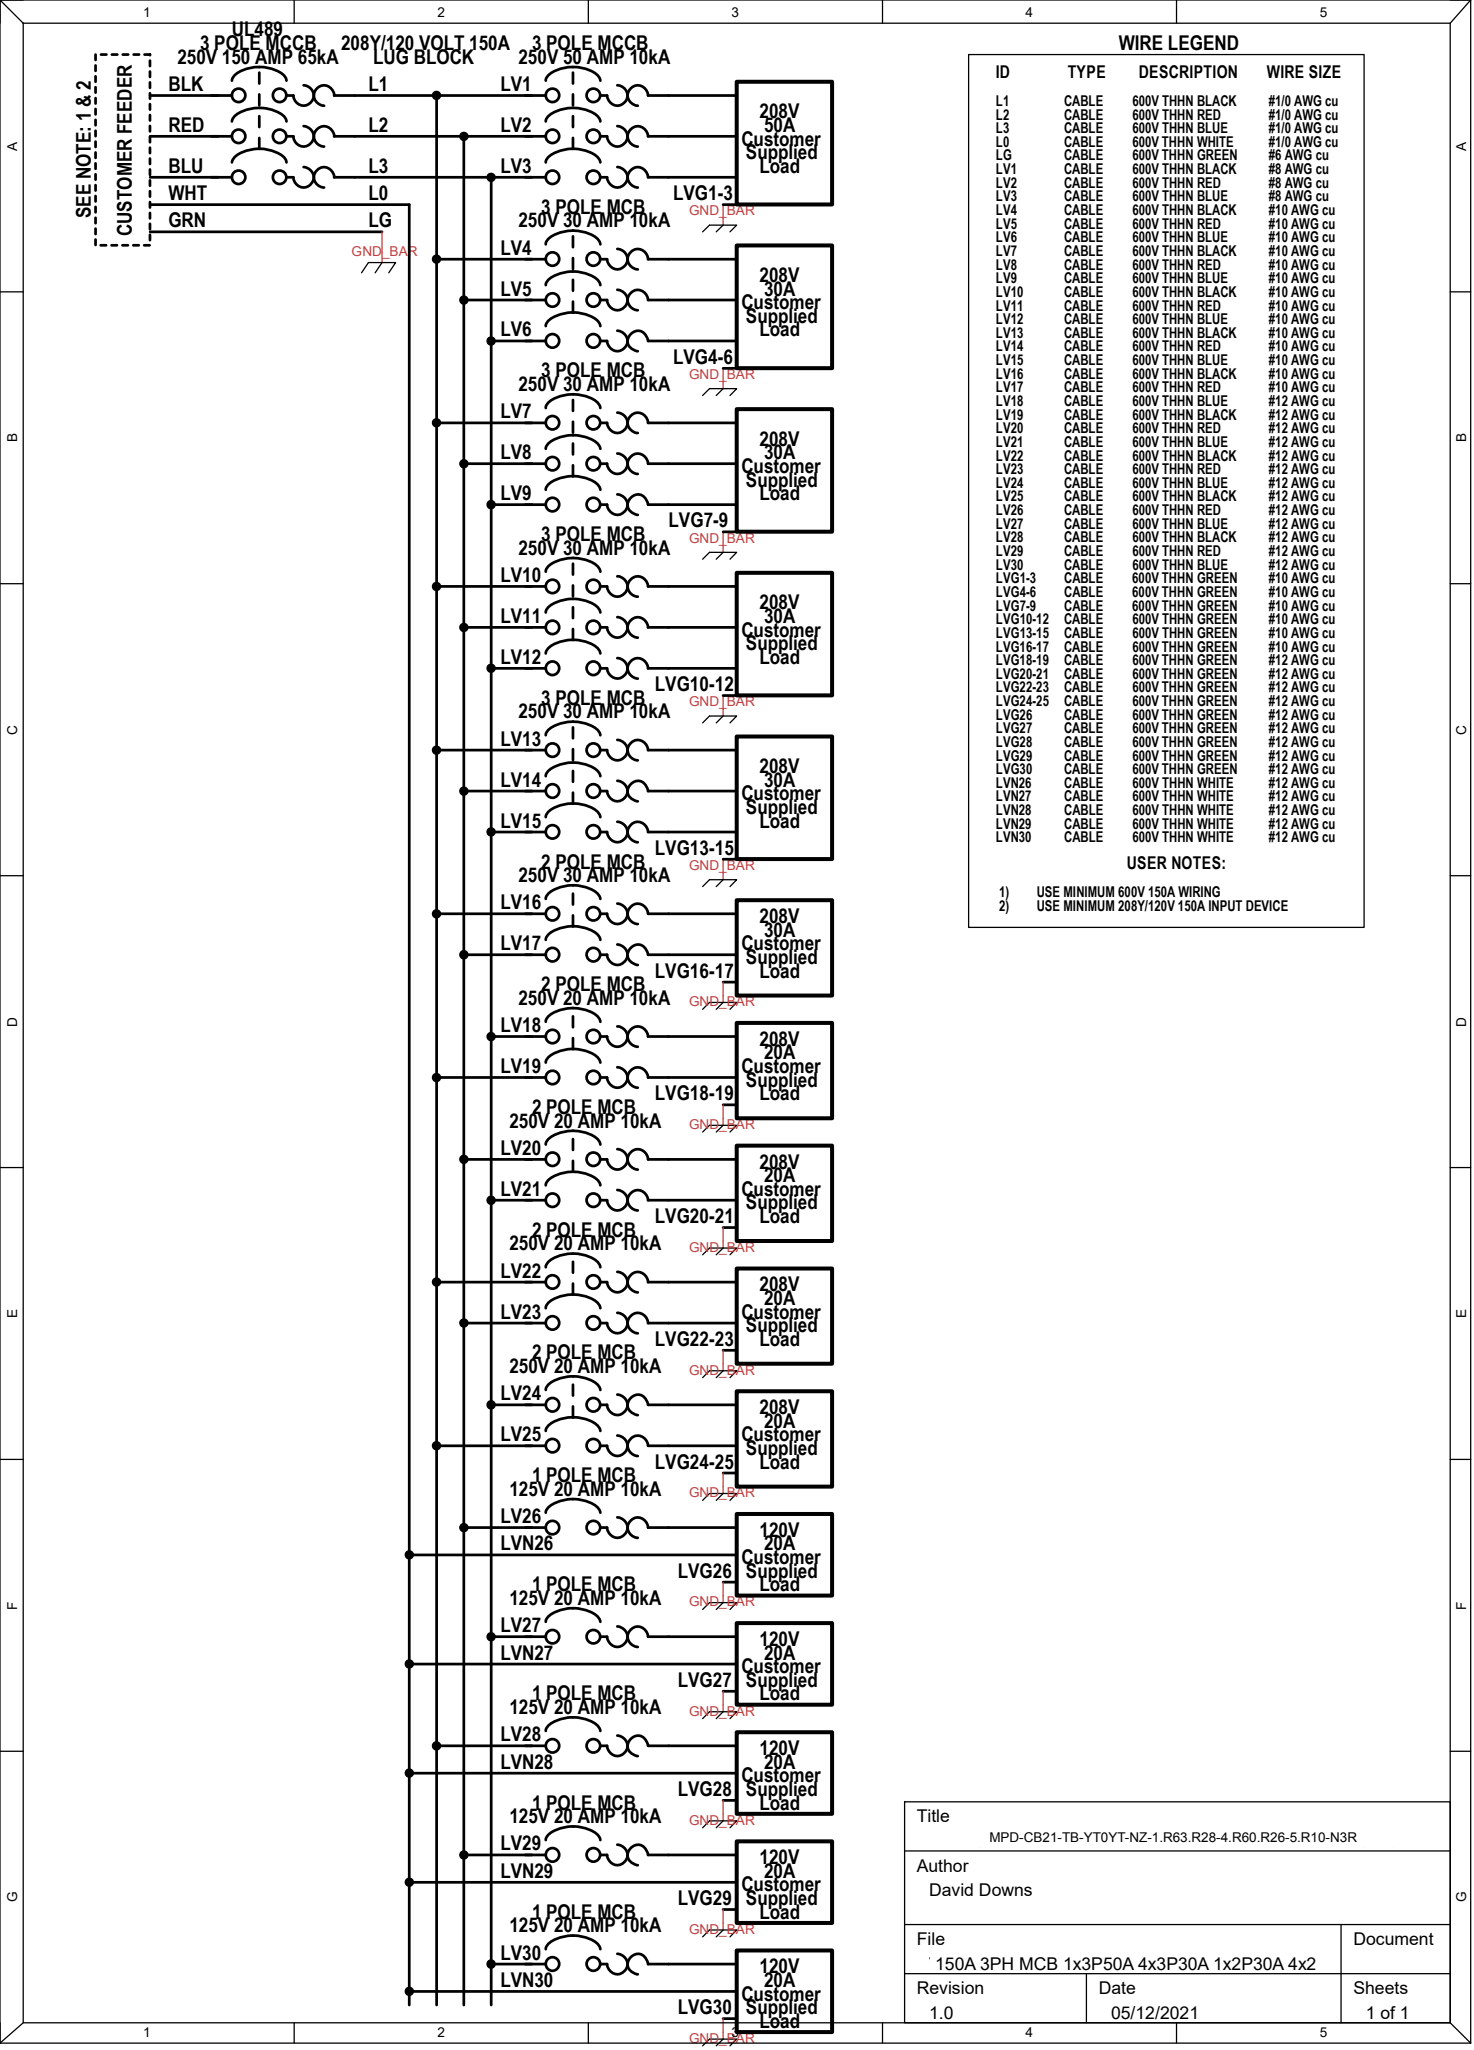


WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
L1	CABLE	600V THHN BLACK	#10 AWG cu
L2	CABLE	600V THHN RED	#10 AWG cu
L3	CABLE	600V THHN BLUE	#10 AWG cu
L0	CABLE	600V THHN WHITE	#10 AWG cu
LG	CABLE	600V THHN GREEN	#6 AWG cu
LV1	CABLE	600V THHN BLACK	#8 AWG cu
LV2	CABLE	600V THHN RED	#8 AWG cu
LV3	CABLE	600V THHN BLUE	#8 AWG cu
LV4	CABLE	600V THHN BLACK	#10 AWG cu
LV5	CABLE	600V THHN RED	#10 AWG cu
LV6	CABLE	600V THHN BLUE	#10 AWG cu
LV7	CABLE	600V THHN BLACK	#10 AWG cu
LV8	CABLE	600V THHN RED	#10 AWG cu
LV9	CABLE	600V THHN BLUE	#10 AWG cu
LV10	CABLE	600V THHN BLACK	#10 AWG cu
LV11	CABLE	600V THHN RED	#10 AWG cu
LV12	CABLE	600V THHN BLUE	#10 AWG cu
LV13	CABLE	600V THHN BLACK	#10 AWG cu
LV14	CABLE	600V THHN RED	#10 AWG cu
LV15	CABLE	600V THHN BLUE	#10 AWG cu
LV16	CABLE	600V THHN BLACK	#10 AWG cu
LV17	CABLE	600V THHN RED	#10 AWG cu
LV18	CABLE	600V THHN BLUE	#10 AWG cu
LV19	CABLE	600V THHN BLACK	#12 AWG cu
LV20	CABLE	600V THHN RED	#12 AWG cu
LV21	CABLE	600V THHN BLUE	#12 AWG cu
LV22	CABLE	600V THHN BLACK	#12 AWG cu
LV23	CABLE	600V THHN RED	#12 AWG cu
LV24	CABLE	600V THHN BLUE	#12 AWG cu
LV25	CABLE	600V THHN BLACK	#12 AWG cu
LV26	CABLE	600V THHN RED	#12 AWG cu
LV27	CABLE	600V THHN BLUE	#12 AWG cu
LV28	CABLE	600V THHN BLACK	#12 AWG cu
LV29	CABLE	600V THHN RED	#12 AWG cu
LV30	CABLE	600V THHN BLUE	#12 AWG cu
LVG1-3	CABLE	600V THHN GREEN	#10 AWG cu
LVG4-6	CABLE	600V THHN GREEN	#10 AWG cu
LVG7-9	CABLE	600V THHN GREEN	#10 AWG cu
LVG10-12	CABLE	600V THHN GREEN	#10 AWG cu
LVG13-15	CABLE	600V THHN GREEN	#10 AWG cu
LVG16-17	CABLE	600V THHN GREEN	#10 AWG cu
LVG18-19	CABLE	600V THHN GREEN	#10 AWG cu
LVG20-21	CABLE	600V THHN GREEN	#12 AWG cu
LVG22-23	CABLE	600V THHN GREEN	#12 AWG cu
LVG24-25	CABLE	600V THHN GREEN	#12 AWG cu
LVG26	CABLE	600V THHN GREEN	#12 AWG cu
LVG27	CABLE	600V THHN GREEN	#12 AWG cu
LVG28	CABLE	600V THHN GREEN	#12 AWG cu
LVG29	CABLE	600V THHN GREEN	#12 AWG cu
LVG30	CABLE	600V THHN GREEN	#12 AWG cu
LVN26	CABLE	600V THHN WHITE	#12 AWG cu
LVN27	CABLE	600V THHN WHITE	#12 AWG cu
LVN28	CABLE	600V THHN WHITE	#12 AWG cu
LVN29	CABLE	600V THHN WHITE	#12 AWG cu
LVN30	CABLE	600V THHN WHITE	#12 AWG cu

USER NOTES:

- 1) USE MINIMUM 600V 150A WIRING
2) USE MINIMUM 208Y/120V 150A INPUT DEVICE

Title		
MPD-CB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R		
Author		
David Downs		
File		Document
150A 3PH MCCB 1x3P50A 4x3P30A 1x2P30A 4x2		
Revision	Date	Sheets
1.0	05/12/2021	1 of 1

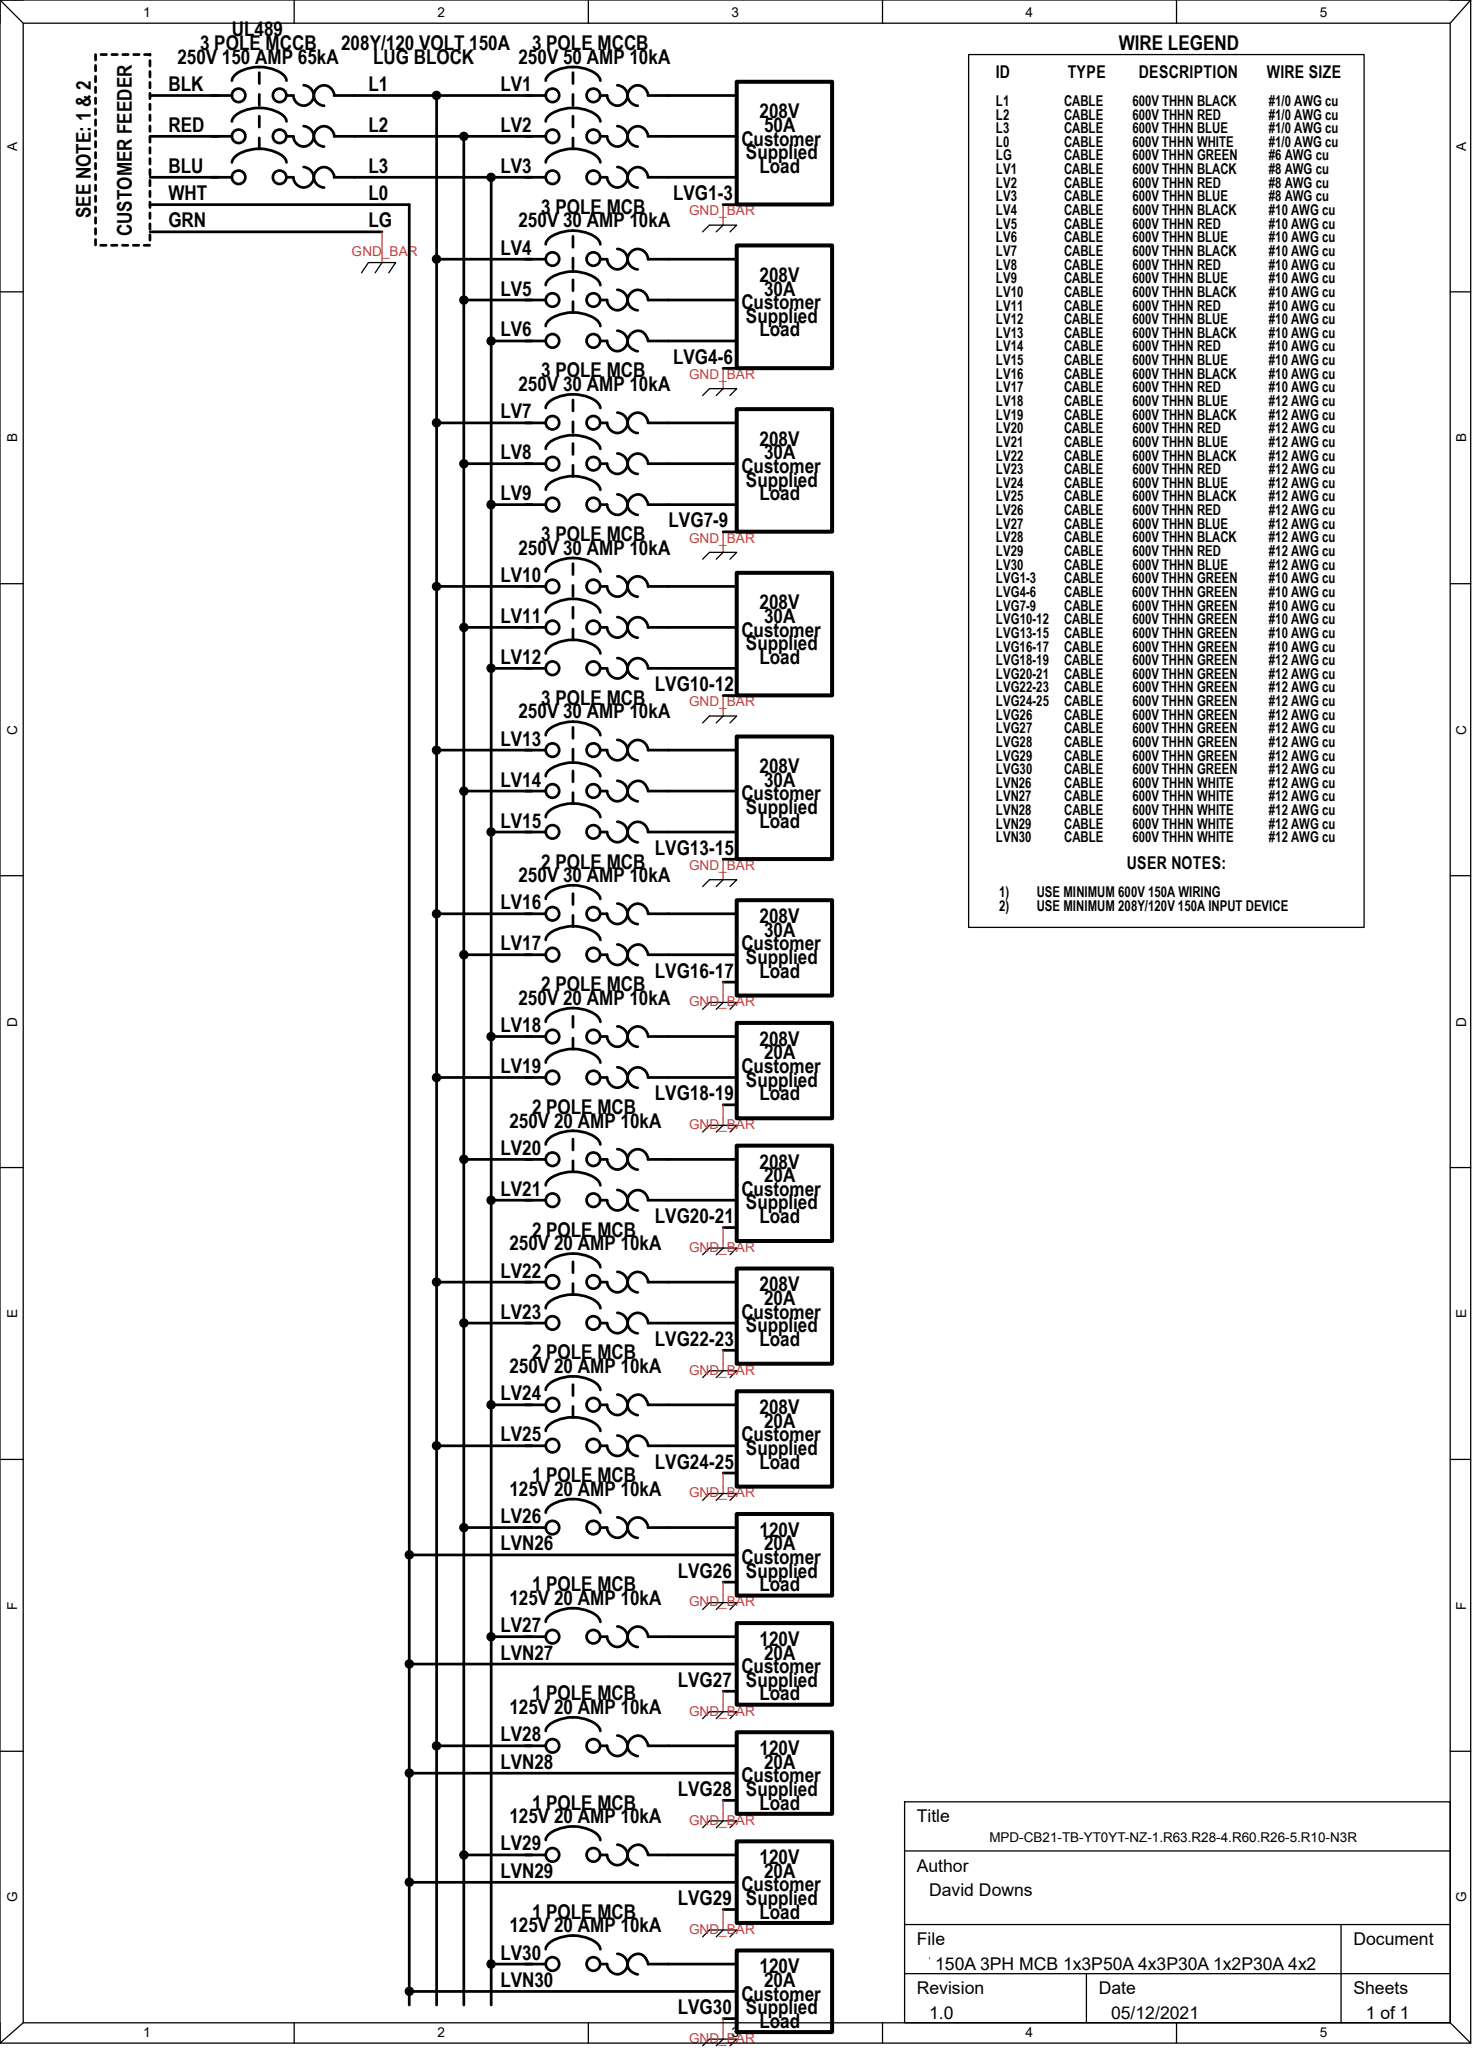


WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
L1	CABLE	600V THHN BLACK	#10 AWG cu
L2	CABLE	600V THHN RED	#10 AWG cu
L3	CABLE	600V THHN BLUE	#10 AWG cu
L0	CABLE	600V THHN WHITE	#10 AWG cu
LG	CABLE	600V THHN GREEN	#6 AWG cu
LV1	CABLE	600V THHN BLACK	#8 AWG cu
LV2	CABLE	600V THHN RED	#8 AWG cu
LV3	CABLE	600V THHN BLUE	#8 AWG cu
LV4	CABLE	600V THHN BLACK	#10 AWG cu
LV5	CABLE	600V THHN RED	#10 AWG cu
LV6	CABLE	600V THHN BLUE	#10 AWG cu
LV7	CABLE	600V THHN BLACK	#10 AWG cu
LV8	CABLE	600V THHN RED	#10 AWG cu
LV9	CABLE	600V THHN BLUE	#10 AWG cu
LV10	CABLE	600V THHN BLACK	#10 AWG cu
LV11	CABLE	600V THHN RED	#10 AWG cu
LV12	CABLE	600V THHN BLUE	#10 AWG cu
LV13	CABLE	600V THHN BLACK	#10 AWG cu
LV14	CABLE	600V THHN RED	#10 AWG cu
LV15	CABLE	600V THHN BLUE	#10 AWG cu
LV16	CABLE	600V THHN BLACK	#10 AWG cu
LV17	CABLE	600V THHN RED	#10 AWG cu
LV18	CABLE	600V THHN BLUE	#10 AWG cu
LV19	CABLE	600V THHN BLACK	#12 AWG cu
LV20	CABLE	600V THHN RED	#12 AWG cu
LV21	CABLE	600V THHN BLUE	#12 AWG cu
LV22	CABLE	600V THHN BLACK	#12 AWG cu
LV23	CABLE	600V THHN RED	#12 AWG cu
LV24	CABLE	600V THHN BLUE	#12 AWG cu
LV25	CABLE	600V THHN BLACK	#12 AWG cu
LV26	CABLE	600V THHN RED	#12 AWG cu
LV27	CABLE	600V THHN BLUE	#12 AWG cu
LV28	CABLE	600V THHN BLACK	#12 AWG cu
LV29	CABLE	600V THHN RED	#12 AWG cu
LV30	CABLE	600V THHN BLUE	#12 AWG cu
LVG1-3	CABLE	600V THHN GREEN	#10 AWG cu
LVG4-6	CABLE	600V THHN GREEN	#10 AWG cu
LVG7-9	CABLE	600V THHN GREEN	#10 AWG cu
LVG10-12	CABLE	600V THHN GREEN	#10 AWG cu
LVG13-15	CABLE	600V THHN GREEN	#10 AWG cu
LVG16-17	CABLE	600V THHN GREEN	#10 AWG cu
LVG18-19	CABLE	600V THHN GREEN	#10 AWG cu
LVG20-21	CABLE	600V THHN GREEN	#12 AWG cu
LVG22-23	CABLE	600V THHN GREEN	#12 AWG cu
LVG24-25	CABLE	600V THHN GREEN	#12 AWG cu
LVG26	CABLE	600V THHN GREEN	#12 AWG cu
LVG27	CABLE	600V THHN GREEN	#12 AWG cu
LVG28	CABLE	600V THHN GREEN	#12 AWG cu
LVG29	CABLE	600V THHN GREEN	#12 AWG cu
LVG30	CABLE	600V THHN GREEN	#12 AWG cu
LVN26	CABLE	600V THHN WHITE	#12 AWG cu
LVN27	CABLE	600V THHN WHITE	#12 AWG cu
LVN28	CABLE	600V THHN WHITE	#12 AWG cu
LVN29	CABLE	600V THHN WHITE	#12 AWG cu
LVN30	CABLE	600V THHN WHITE	#12 AWG cu

USER NOTES:

- 1) USE MINIMUM 600V 150A WIRING
2) USE MINIMUM 208Y/120V 150A INPUT DEVICE

Title		
MPD-CB21-TB-YT0YT-NZ-1.R63.R28-4.R60.R26-5.R10-N3R		
Author		
David Downs		
File		Document
150A 3PH MCCB 1x3P50A 4x3P30A 1x2P30A 4x2		
Revision	Date	Sheets
1.0	05/12/2021	1 of 1

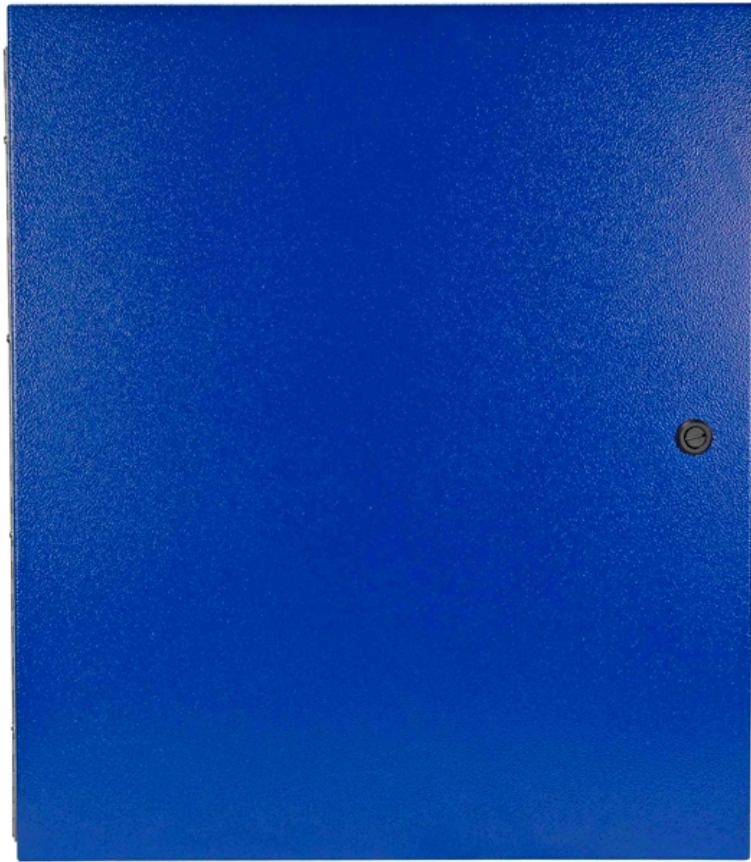



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards

ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the statements(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL Series from Larson Electronics LLC utilize components certified to NEC and CEC standards. Larson Electronics LLC specifies wiring device standard designations (e.g. NEMA 5-20R, NEMA L6-30R, CS8265C) in the electrical diagrams and spec sheet of each product. Unless specified, the brands of components used, which may vary based on availability at the time of build, include but are not limited to: Hubbell, Leviton, Molex, Daniel Woodhead, Legrand, Eaton, Thomas & Betts, Russel Stroll, Meltric, Mennekes, ABB Group, Emerson, Appleton, Crouse Hinds, Killark, R.Stahl, or other certified equipment manufacturers.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



TECHNICAL INFORMATION

POWDURA® POLYESTER TGIC POWDER COATING

PRODUCT DESCRIPTION

PLR2-60002

RAL 5010 GENT BLUE

POWDURA® Polyester TGIC Powder

Coatings are recommended for a broad range of interior/exterior functional and decorative applications.

Advantages:

- Provides excellent overbake resistance
- Good chemical resistance
- Very good outdoor exposure qualities
- Wide range of special effects available
- Available in a broad range of colors

Many applications, including:

Steel Furniture
Refrigeration
Electronic Cabinetry
Scaffolding
Electrical Equipment
Instrument Housings

Appliances
Sporting Goods

Storage: Powdura® Powder Coatings should be kept in a dry and cool area at temperatures below 80°F (27°C). When not in use, store powder in sealed containers: fine powders are hygroscopic.

Substrate Preparation: Substrate should be free of grease, oil, dirt, fingerprints, drawing compounds, any contamination, and surface preparation treatments to ensure optimum adhesion and coating performance properties. The use of a chemical conversion coating prior to the application of a powder coating is strongly recommended.

Testing: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full-scale application.

CAUTIONS

Thoroughly review product SDS prior to using this product. Please consult your local sales representative or your local Sherwin-Williams facility for additional information.

Special Advisory: River texture type finishes are unique finishes that may vary with application, film thickness and cure conditions. Light colors and very dark colors may occasionally show colored specks that appear as contamination.

This is the nature of this type of finish and cannot be predicted or controlled. Thorough cleaning is required when switching to a normal smooth powder coating to prevent craters in the smooth finish.

APPLICATION

Cure Schedule: 10 MIN @ 400F

Film Thickness Range(mils): 3.0-5.0

ATTRIBUTES

Specific Gravity(g/ml): 1.72

Coverage at 1.0 Mil(ft²/lb): 112.4

60° Gloss: 15-30
(ASTM D-523)

Adhesion: 5B
(ASTM D-3359)

Flexibility: Pass 1/8"
(ASTM D-522)

Pencil Hardness: H-2H
(ASTM D-3363)

Impact Resistance(in.lb): Dir 100 in-lbs
(ASTM D-2794) Rev 100 in-lbs

Note: Performance measured using 24-gauge Bonderite® 1000 test panels.

Shelf Life: 12 Months

Sherwin-Williams recommends that all material be used in FIFO order (first in - first out). Materials that exceed the recommended shelf life should be tested prior to use.

Note:

Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating and opinions stated above pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application, which are not known, or under our control, The Sherwin-Williams Company cannot make any warranties or guaranties as to the end results.

08 00

Grove City Product Mod

24-Mar-2020



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MGL, MPD, MGS, WAL Series industrial line of portable power distribution systems are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

[<- Back](#)

Product Description

Title: STAGE & STUDIO PORTABLE WIRING COMPARTMENTS
Company: LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information: Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

[Intertek Home](#)
[Product Directories](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: INDUSTRIAL CONTROL EQUIPMENT

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Industrial Control Panels For General Use.

Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.

Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Evaluated Standards:

AISC: Structural steel skid design

NFPA 70: National Electrical Code

ASTM A36: Standard Specification for Carbon Structural Steel

ASTM A123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM A489: Standard Specification for Carbon Steel Lifting Eyes

ASTM A502: Standard Specification for Rivets, Steel, Structural

ASTM A563: Standard Specification for Carbon and Alloy Steel Nuts

ASTM A500: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes

ASTM B172: Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors

ASTM D7803: Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Powder Coating

SAE J429: Mechanical and Material Requirements for Externally Threaded Fasteners

AWS D1.1: Structural Welding – Steel

ICEA S-58-679: Standard for Control, Instrumentation and Thermocouple Extension Conductor Identification

ICEA S-75-381: Portable and Power Feeder Cables for Use in Mines and Similar Applications

NEMA OFP 1-2017: Protection of Receptacle Outlets in Wet Locations According to the National Electrical Code



NEMA PB 1-2011: Panelboards

NEMA ST 20-2014: Dry Type Transformers for General Applications

NEMA WD 1-1999 (R2015): General Color Requirements for Wiring Devices

ANSI C80.1-2015: American National Standard for Electric Rigid Steel Conduit

ANSI C119.4-2016: American National Standard for Electric Connectors

ANSI Z535.4-2011: American National Standard for Product Safety Signs and Labels

ANSI/IEC 60529-2004 (R2011): American National Standard for Degrees of Protection
Provided by Enclosures (IP Code)

Signed for and on behalf of: Larson Electronics, LLC

Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas

Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The MGL, MPD, MGS, WAL series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union ("EU") Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances ("REACH").

REACH does not apply to manufactured products which are referred to as "completed articles". Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature:

Name: James Thomas
Position: Operations Manager

Frequently Asked Questions (FAQ)