

MPD-CP6-CLP6-DE45YT-PZ-60.CLR5-5.L09.L05-10.N10-M1

45 KVA Portable Distribution, 480V-208Y/120 3PH, (40) Receptacles, Skid Mount

Product ID: 278924



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-CP6-CLP6-DE45YT-PZ-60.CLR5-5.L09.L05-10.N10-M1 Temporary Power Distribution System

Line-in Cord: -

Line-in Cord Cap: 400 A Single-Pole 16-Series Camlock Male Receptacles (3 ea) Green, Brown, Orange, Yellow [600 V] w/ Flip Covers - Located on Narrow Side (26" End of Unit) of Enclosure

Primary Voltage (V): 480 V AC Delta

Primary Phase (PH): 3-Phase (3PH)

Primary Frequency (HZ): 60 Hz (60-cycles)

Primary Panel: 480D 3PH (3) x 200 A 3P MCCB = 600 A Rated N3R

Primary Breaker: (1) 60 A 3P MCCB [480 V]; (5) 50 A 3P MCCB [480 V]; (10) 30 A 3P MCCB [480 V]; (1) 25 A 3P MCB [480 V]

Primary Outlets: 150A Single-pole 15-Series Camlock Female Receptacles (15 ea) Green, Brown, Orange, Yellow [600 V] w/ Flip Covers

Primary Protection: MCCB Circuit Breakers; MCB Circuit Breaker

Transformer (kVA): (1) 45 kVA 480D to 280Y/120 V 3PH N3R; (1) 15 kVA 480D to 380Y/220 V 3PH N3R

Secondary Voltage (V): 208Y/120 V AC Wye & 380Y/220 V AC Wye

Secondary Phase (PH): 3-Phase (3PH)

Secondary Frequency (HZ): 60 Hz (60-cycles)

Secondary Panel: (1) 208Y/120 V 3PH 125 A MLO N3R & (1) 380Y/220 V 3PH 25 A MLO N3R

Secondary Breakers: (5) 30 A 2P MCB [250 V]; (5) 30 A 1P MCB [125 V]; (10) 20 A 1P MCB [125 V]; (5) 13 A 1P MCB [250 V]

Secondary Outlets: (5) L6-30R NEMA Twist-Lock [250 V]; (5) L5-30R NEMA Twist-Lock [125 V]; (10) 5-20R NEMA GFCI DPLX [125 V]; (5) BS1363 (UK1-13R) Socket [220 V]

Secondary Protection: MCB Circuit Breakers; GFCI's

Form Factor: Blue Powder Coated Steel Closed Cube w/Casters

Doors: (2)

Frame Material: Steel

Ratings

Max Primary OCP: 3 x 200 A @ 480s

Max Secondary Output: 125 A @ 208 V & 23 A @ 380 V

NEMA 3R Indoor or Outdoor Use

Made in the USA

NRTL Certified to UL 1640

NRTL Certified to CSA C22.2 No. 14

Powder Coat Finish Standards:

Complies with ASTM D-523

Complies with ASTM D-3359

Complies with ASTM D-522

Complies with ASTM D-3363

Complies with ASTM D-2794

Frame Finish: High-strength TGIC Polyester Powder Coated Blue
Cart Handle Orientation: Horizontal
Lifting Eyelet: (4) Top Located
Skid Pockets: (2) Bottom Located
Dimensions: 70"-L X 80"-H X 26"-D Maximum (will not exceed this size)
Weight: 3150 lb

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in Texas

The MPD-CP6-CLP6-DE45YT-PZ-60.CLR5-5.L09.L05-10.N10-M1 from Larson Electronics is a Power Distribution Substation that converts three-phase 480 V AC electrical current to three-phase 208Y/120 V AC Wye & 380Y/220 V AC Wye. This fully enclosed power distribution unit provides operators the ability to safely tap into and distribute 480 V AC power from a variety of sources including generators and direct grid power.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

The MPD-CP6-CLP6-DE45YT-PZ-60.CLR5-5.L09.L05-10.N10-M1 temporary power distribution system gives operators the ability to power their 120 volt equipment from a single system.

Operation:

- Primary Voltage: 3-phase 480 V AC Delta
- Primary Receptacles: 150 A Single-Pole 15-Series Camlock Female Receptacles (15 ea) Green, Brown, Orange, Yellow [600 V] w/ Flip Covers - Located on Narrow Side (End of Unit) of Enclosure
- Transformer: (1) 45 kVA 480D to 280Y/120 V 3PH N3R; (1) 15 kVA 480D to 380Y/220 V 3PH N3R
- Secondary Voltage: 3-phase 208Y/120 V AC Wye & 380Y/220 V AC Wye
- Secondary Receptacles: (5) L6-30R NEMA Twist-Lock [250 V]; (5) L5-30R NEMA Twist-Lock [125 V]; (10) 5-20R NEMA GFCI DPLX [125 V]; (5) BS1363 (UK1-13R) Socket [220 V]

*See specification table at the top of the page for more information about the power distribution system.

Input Power Camlock Location: The camlock inputs for this unit are located on the narrow (26") side or end of the enclosure offering a convenient location for connecting input power.

Protective Construction: This temporary power distribution unit is fully enclosed and is ruggedly constructed to withstand demanding conditions and industrial applications. The system is accessible via two doors at each end for access to breakers on the panels and a center-located door for access to receptacles. The model is equipped with bottom-located forklift skid pockets and four top-located lifting eyelets, which allows easy lifting with cable or chain hooks.

The power distribution system is constructed of steel with a polyester powder coated blue finish for durability against dirt, moisture and mild corrosion. This special coating creates a high-strength barrier for protection from accidental bumps and scratches. The TGIC polyester powder coat finish offers reliable resistance against chemicals, UV light (sun light) and degrading elements in outdoor locations. Our powder coating solution ensures robust color retention for many years without fading. Custom colors, such as black, grey, desert tan or forest green, and galvanized finishes are available upon request. Non-standard powder coat colors or galvanized finishes may increase price and lead times.

Certification: All units are built in accordance to NFPA 70 (National Electric Code) and certified to UL 1640. All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.


Grounding: Transformer is grounded to the frame and we provide a grounding lug on the frame for the earth ground.


~Please check all motor loads for dual rated motors that will work 208 or 240.~


Applications: This power distribution system is ideal for indoor or outdoor use and applications including but not limited to, construction sites, plant maintenance, plant turnarounds, shows, exhibits, and shipyard operations. These power distribution systems are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.


Custom Built Systems Available: Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						9/16/2021
MPD-CP6-CLP6-DE45YT-PZ-60.CLR5 -5.L09.L05-10.N10-M1 							
8	7	6	5	4	3	2	1

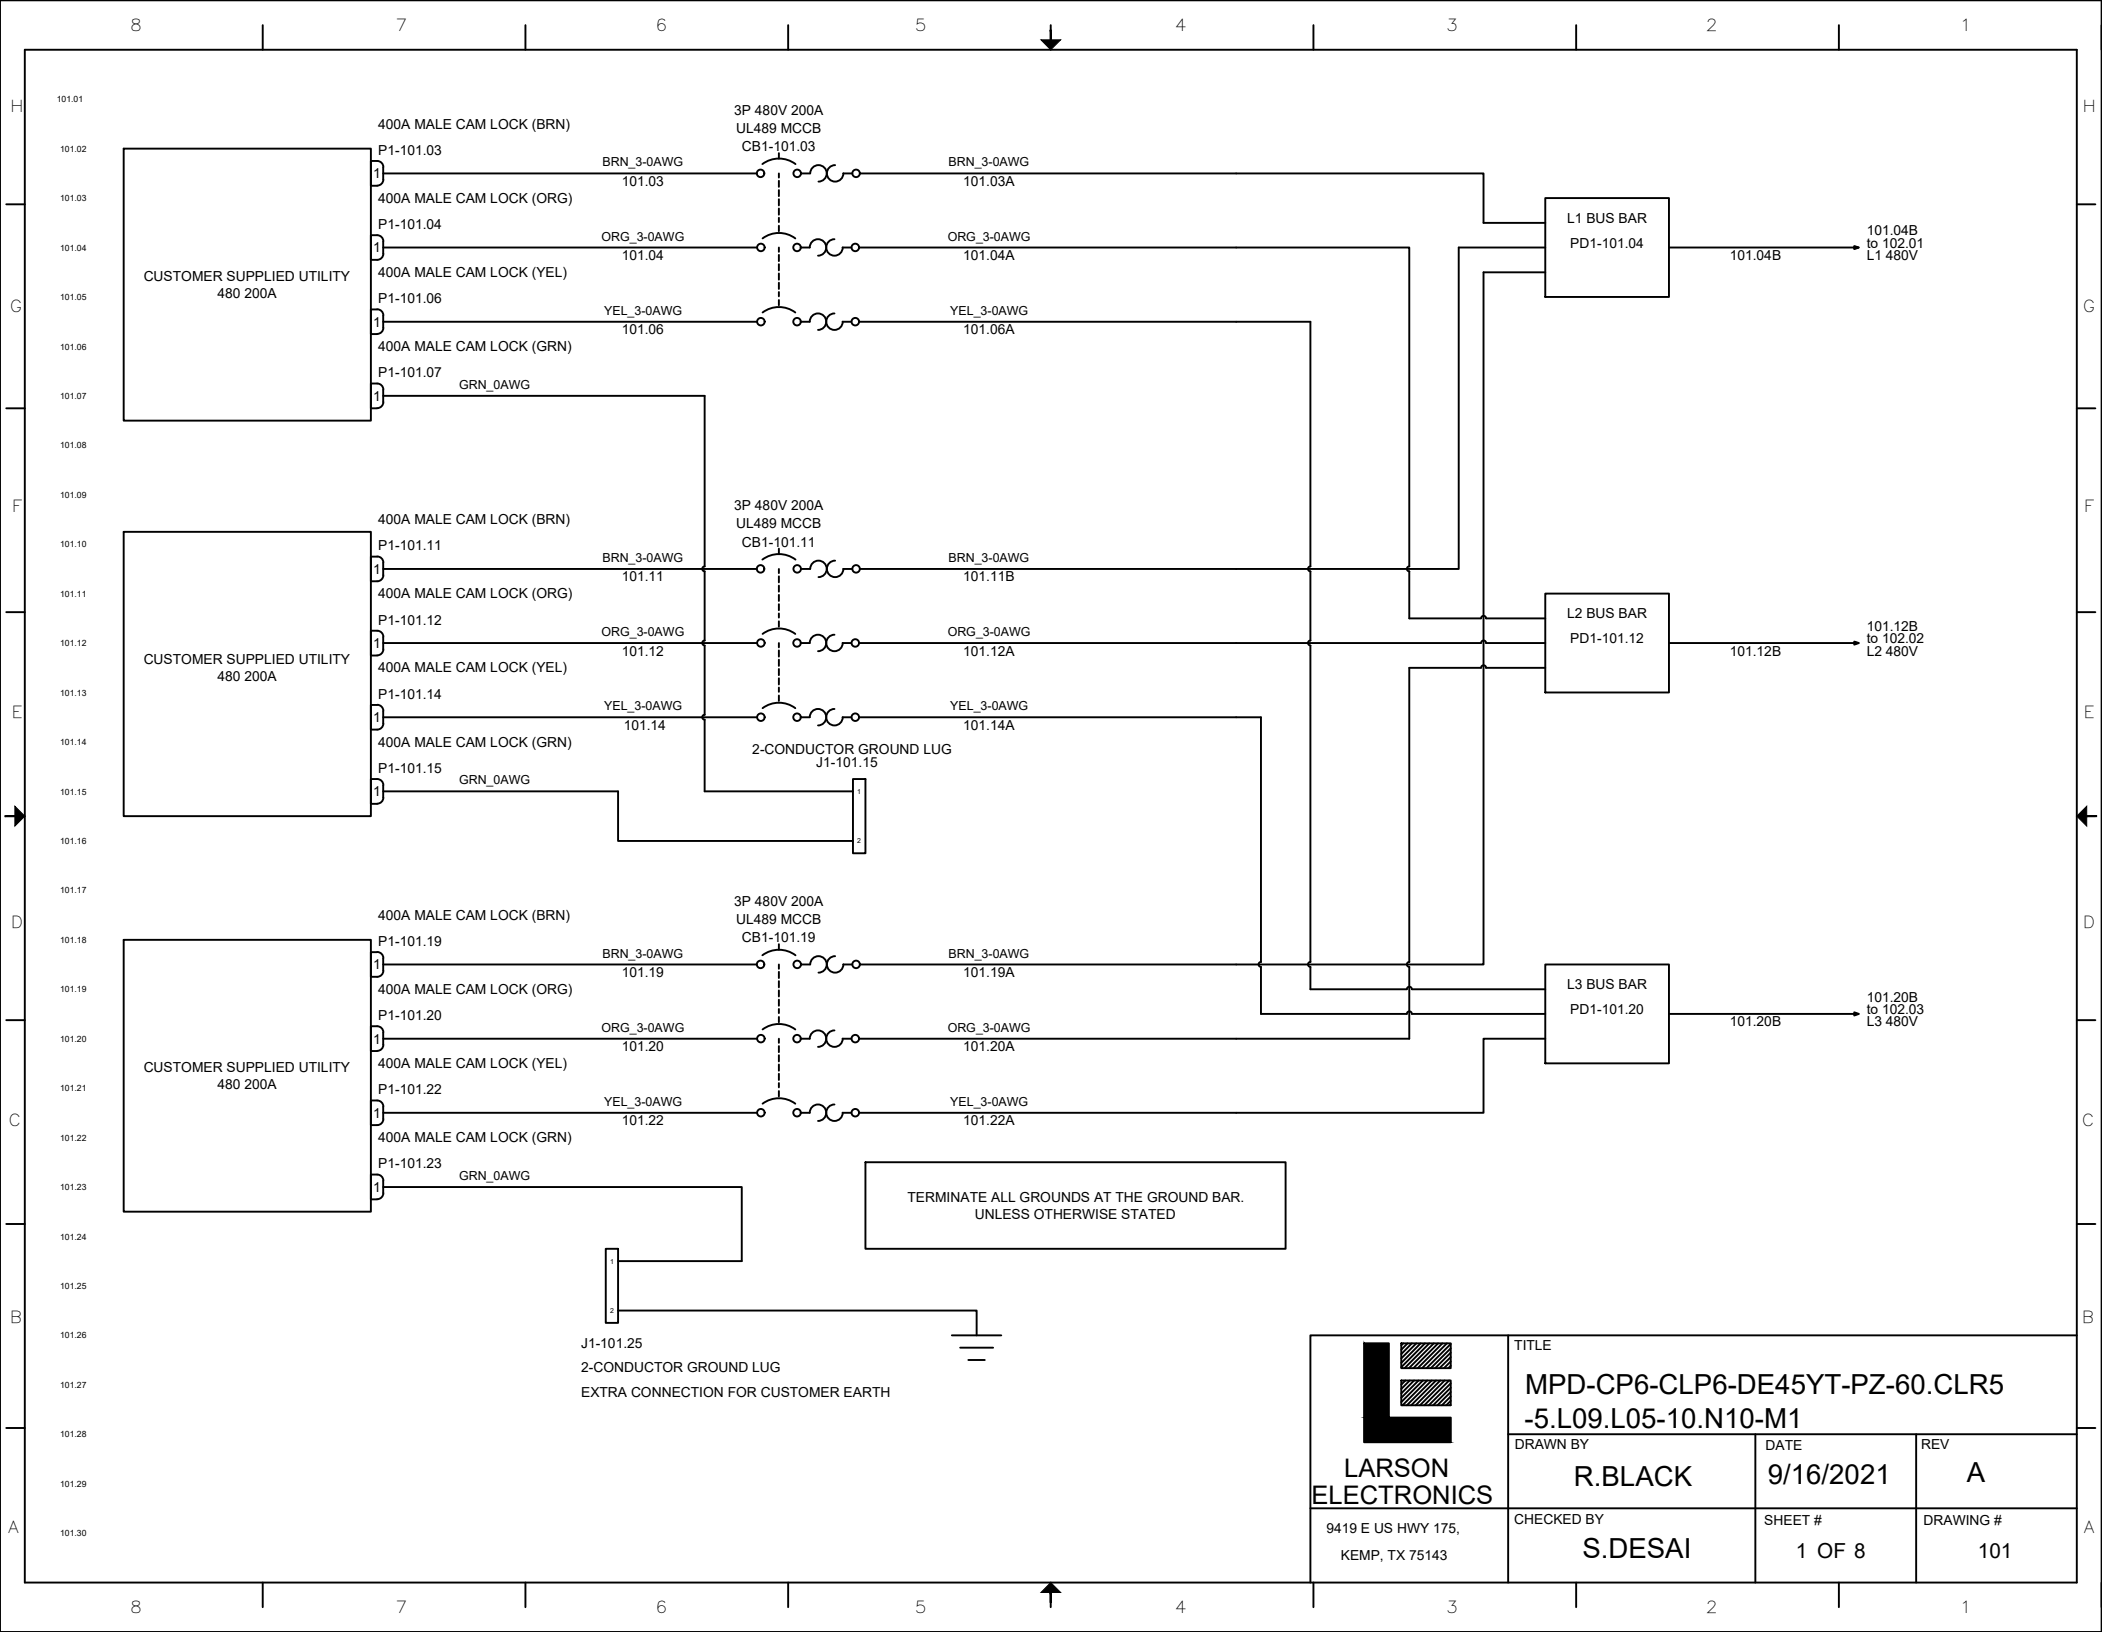


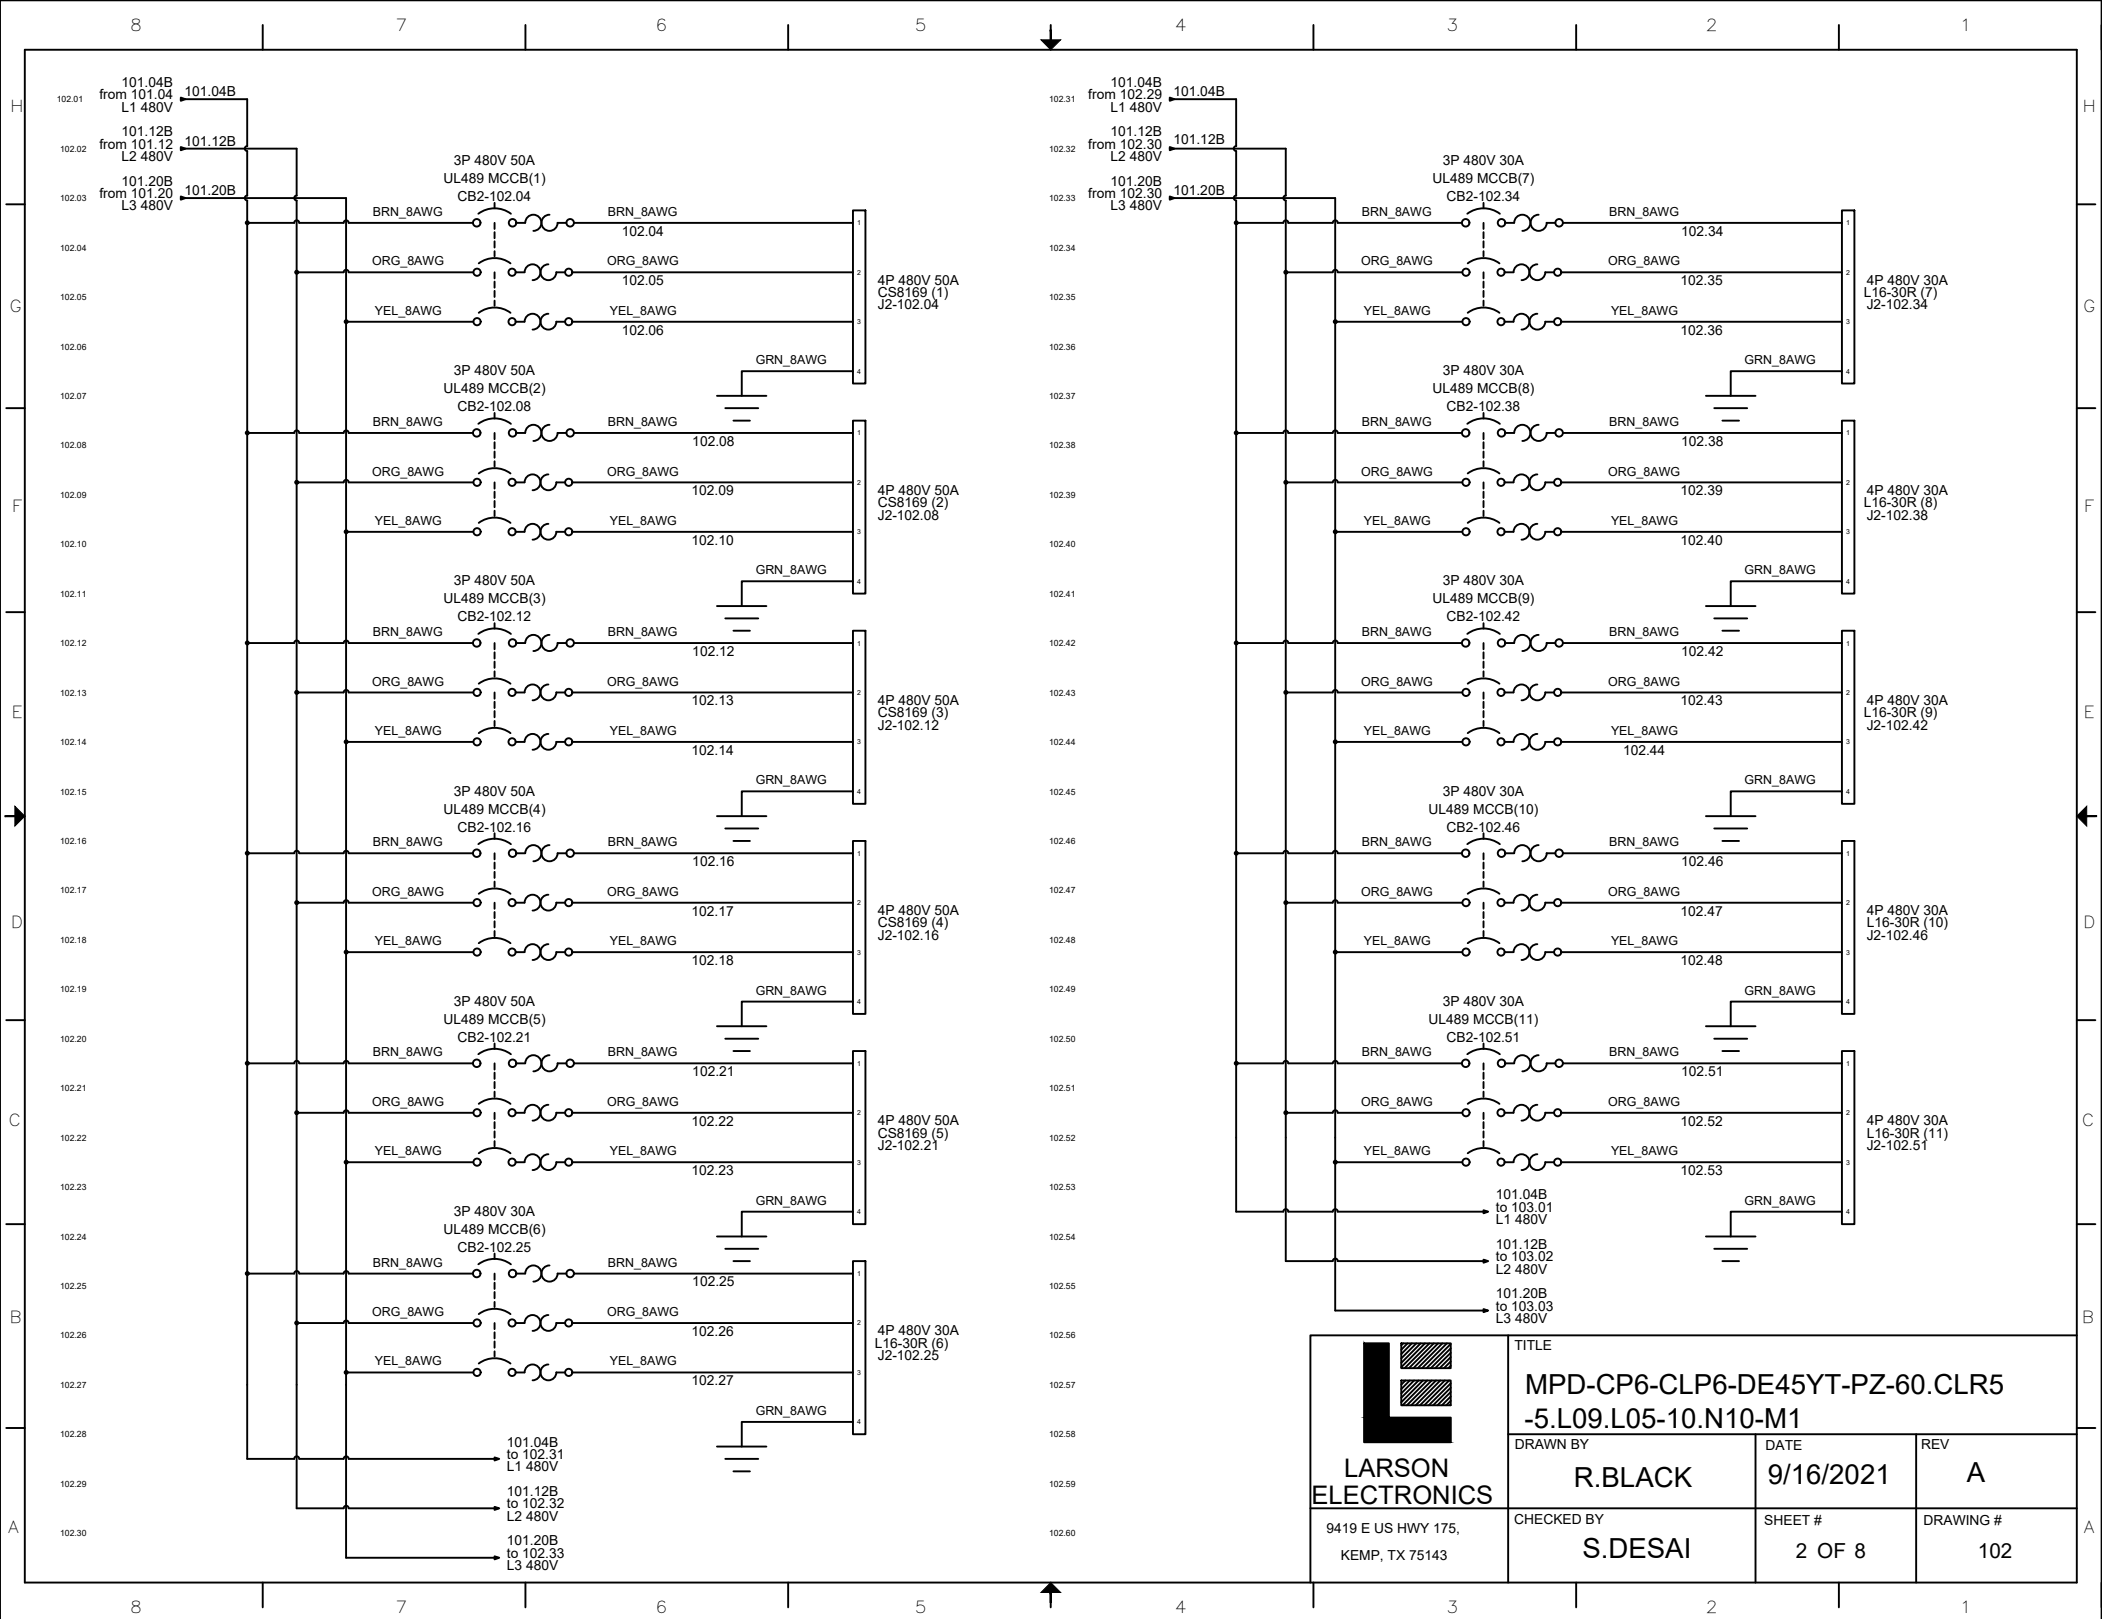


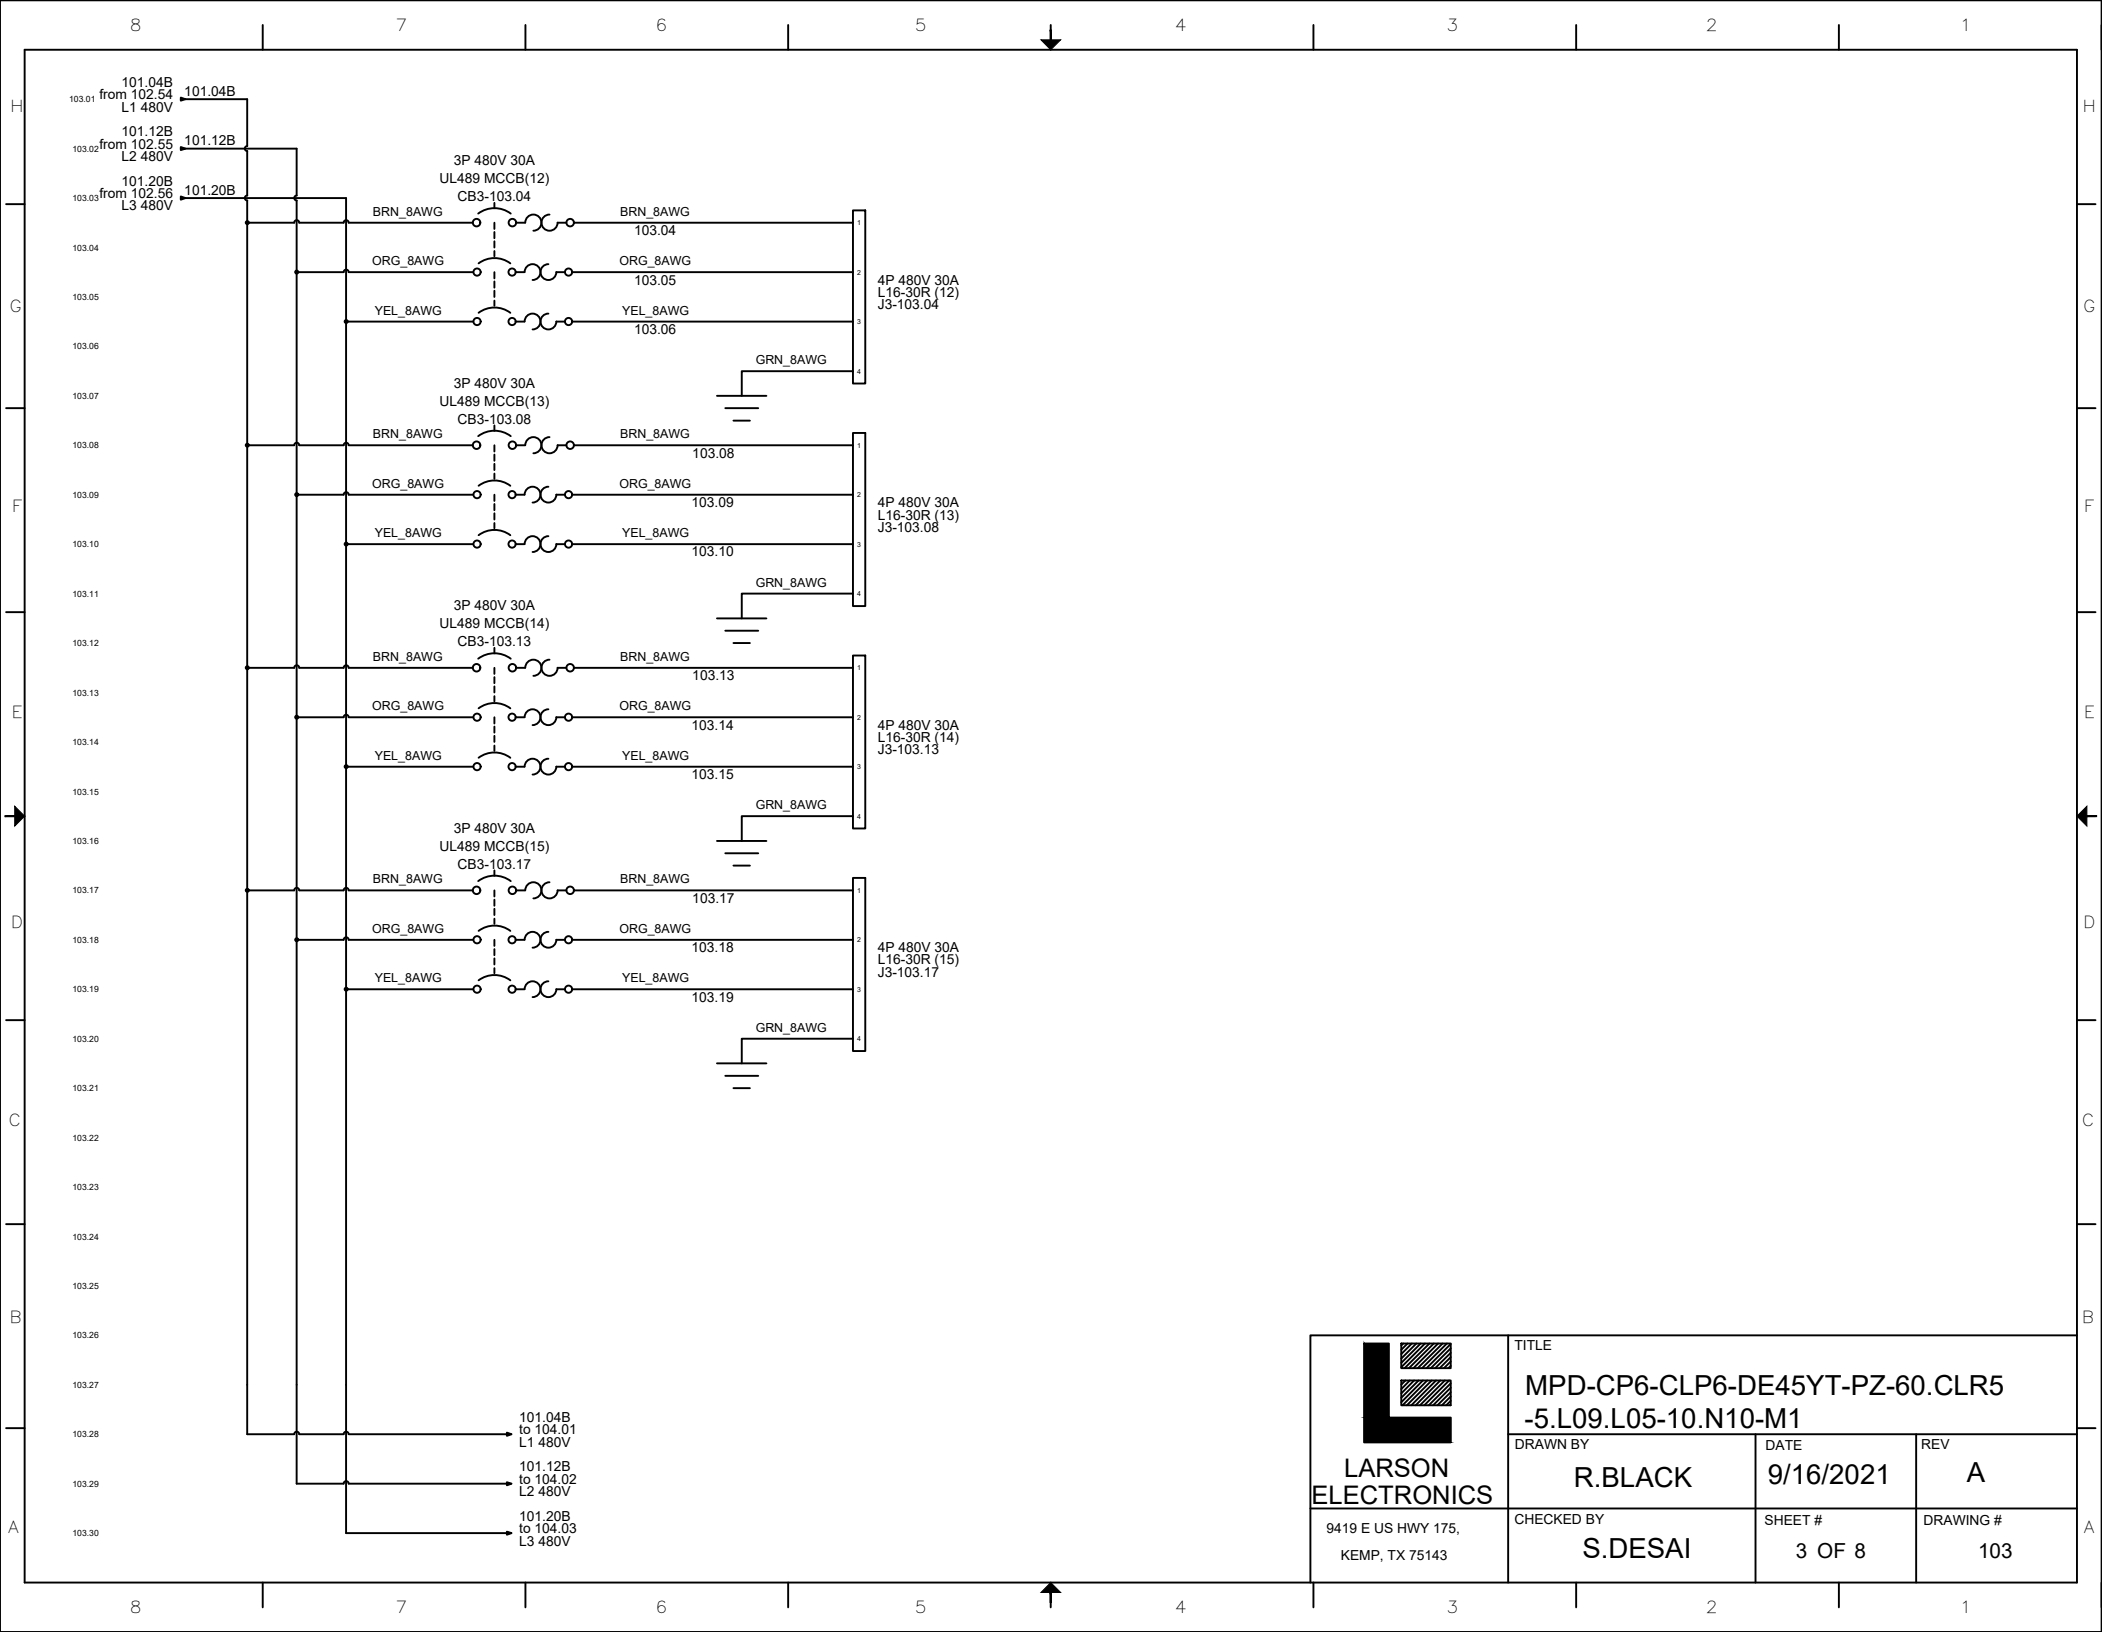

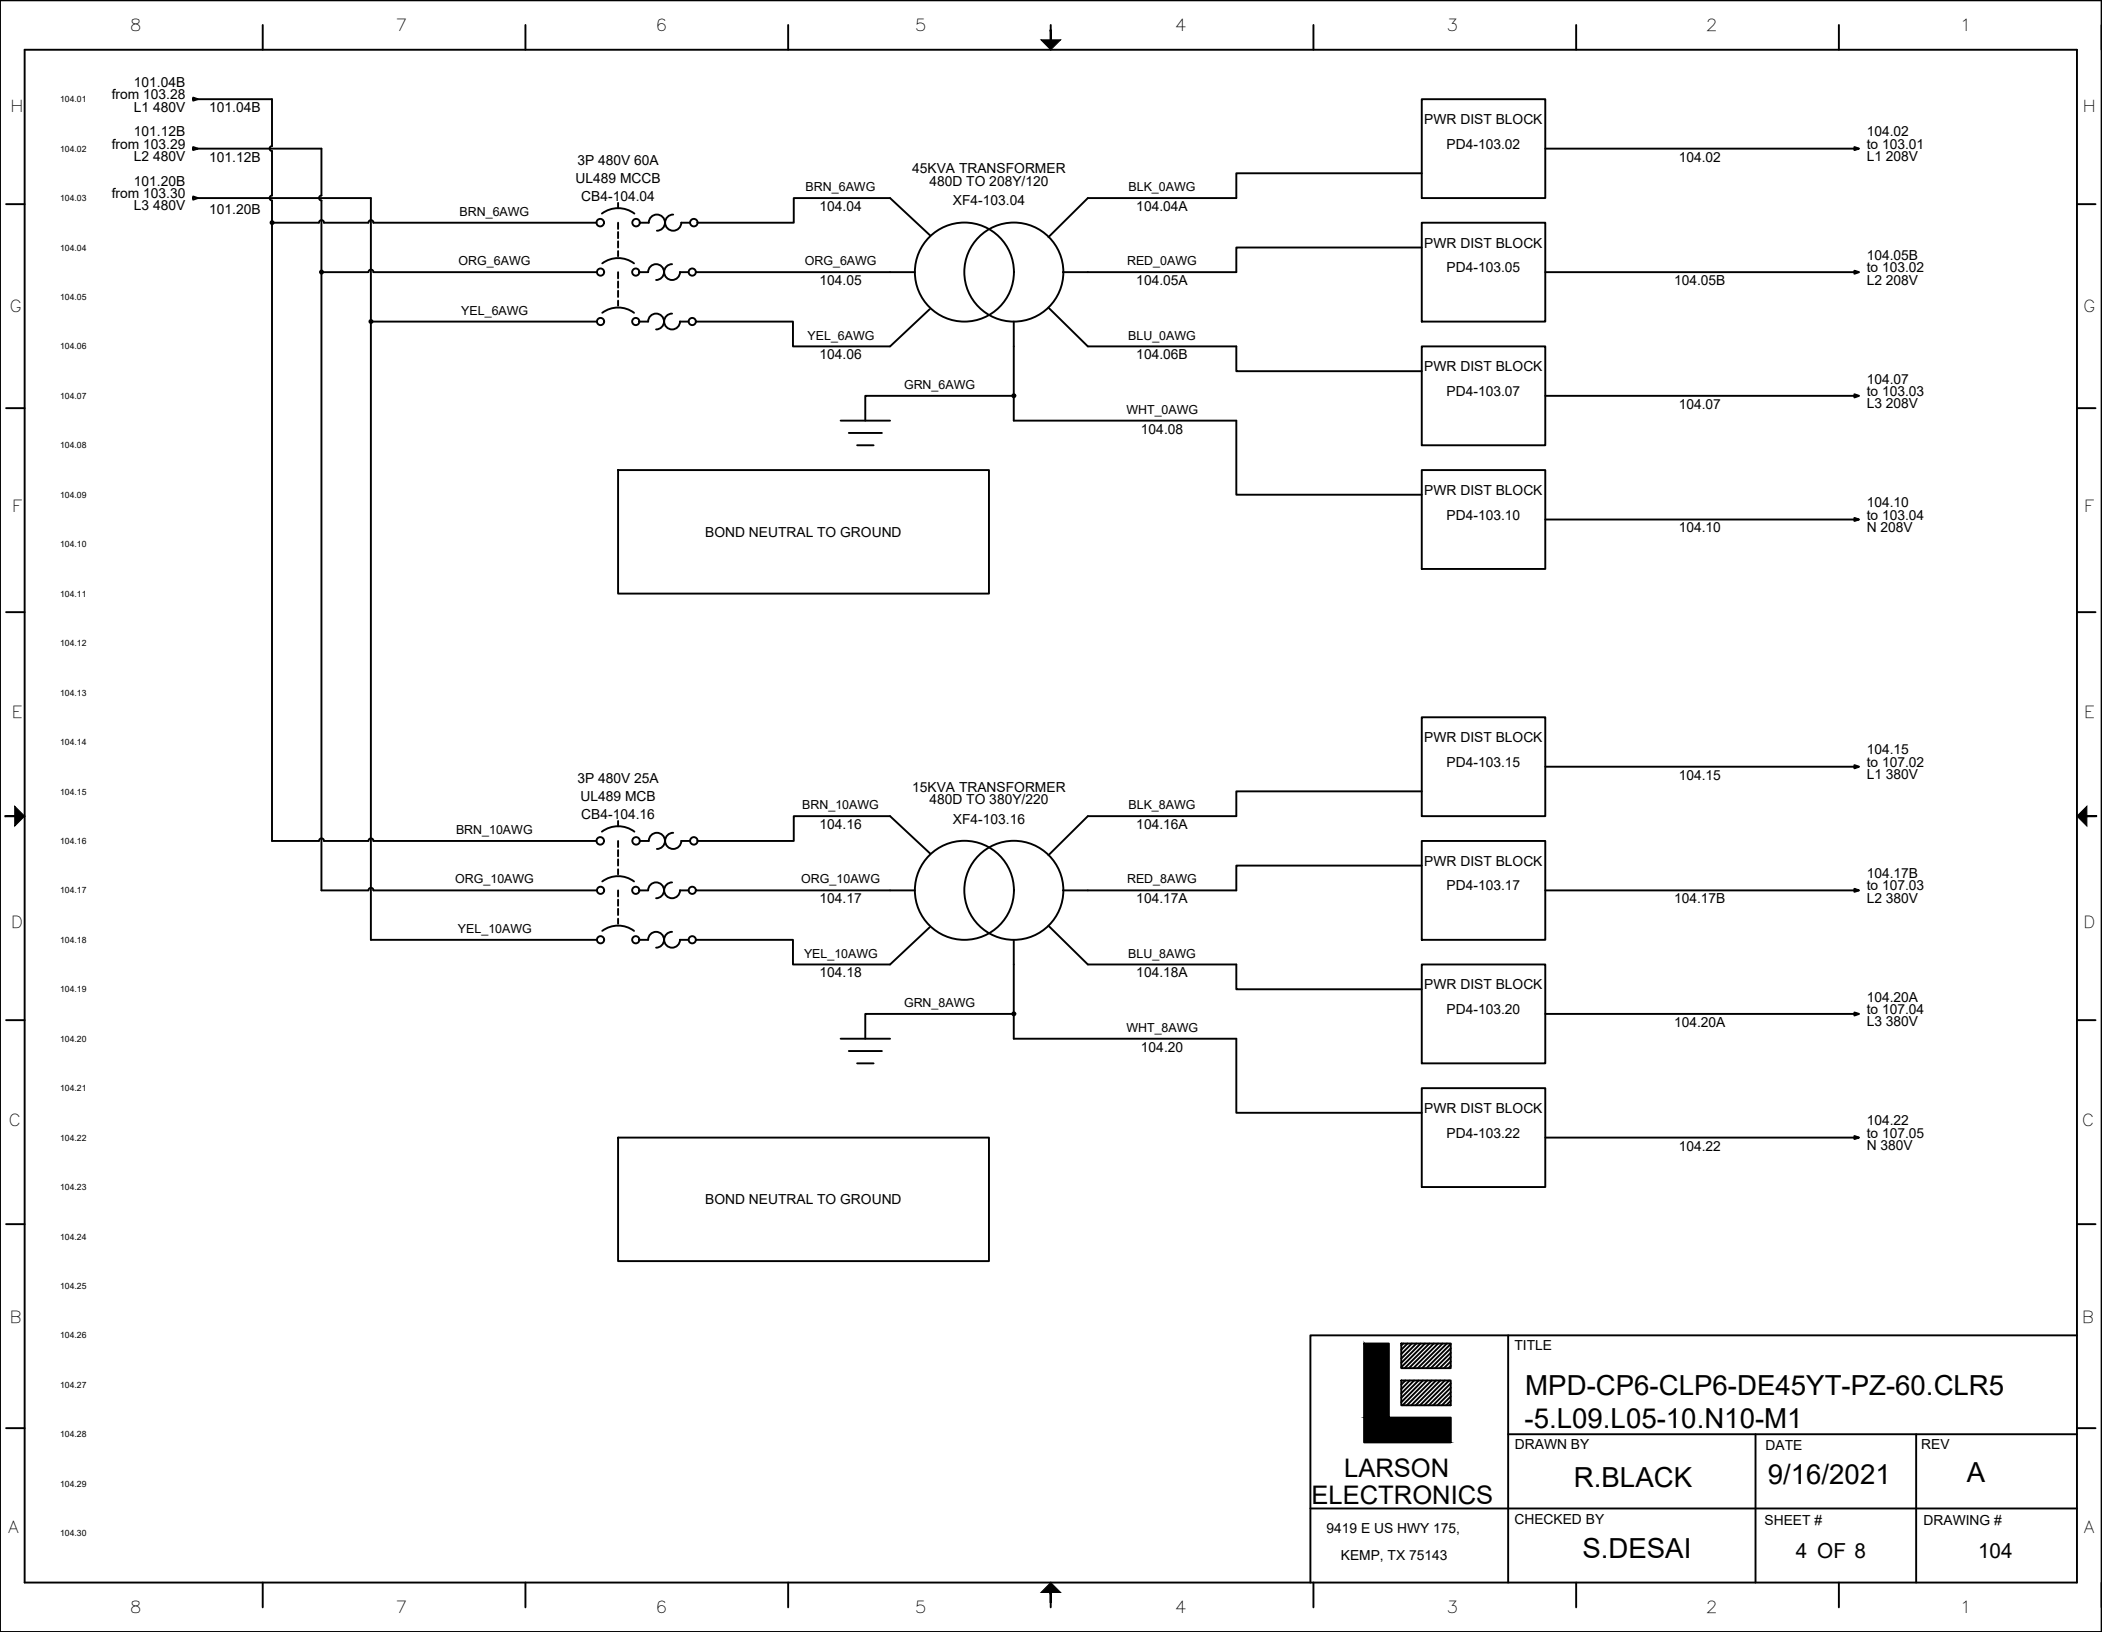

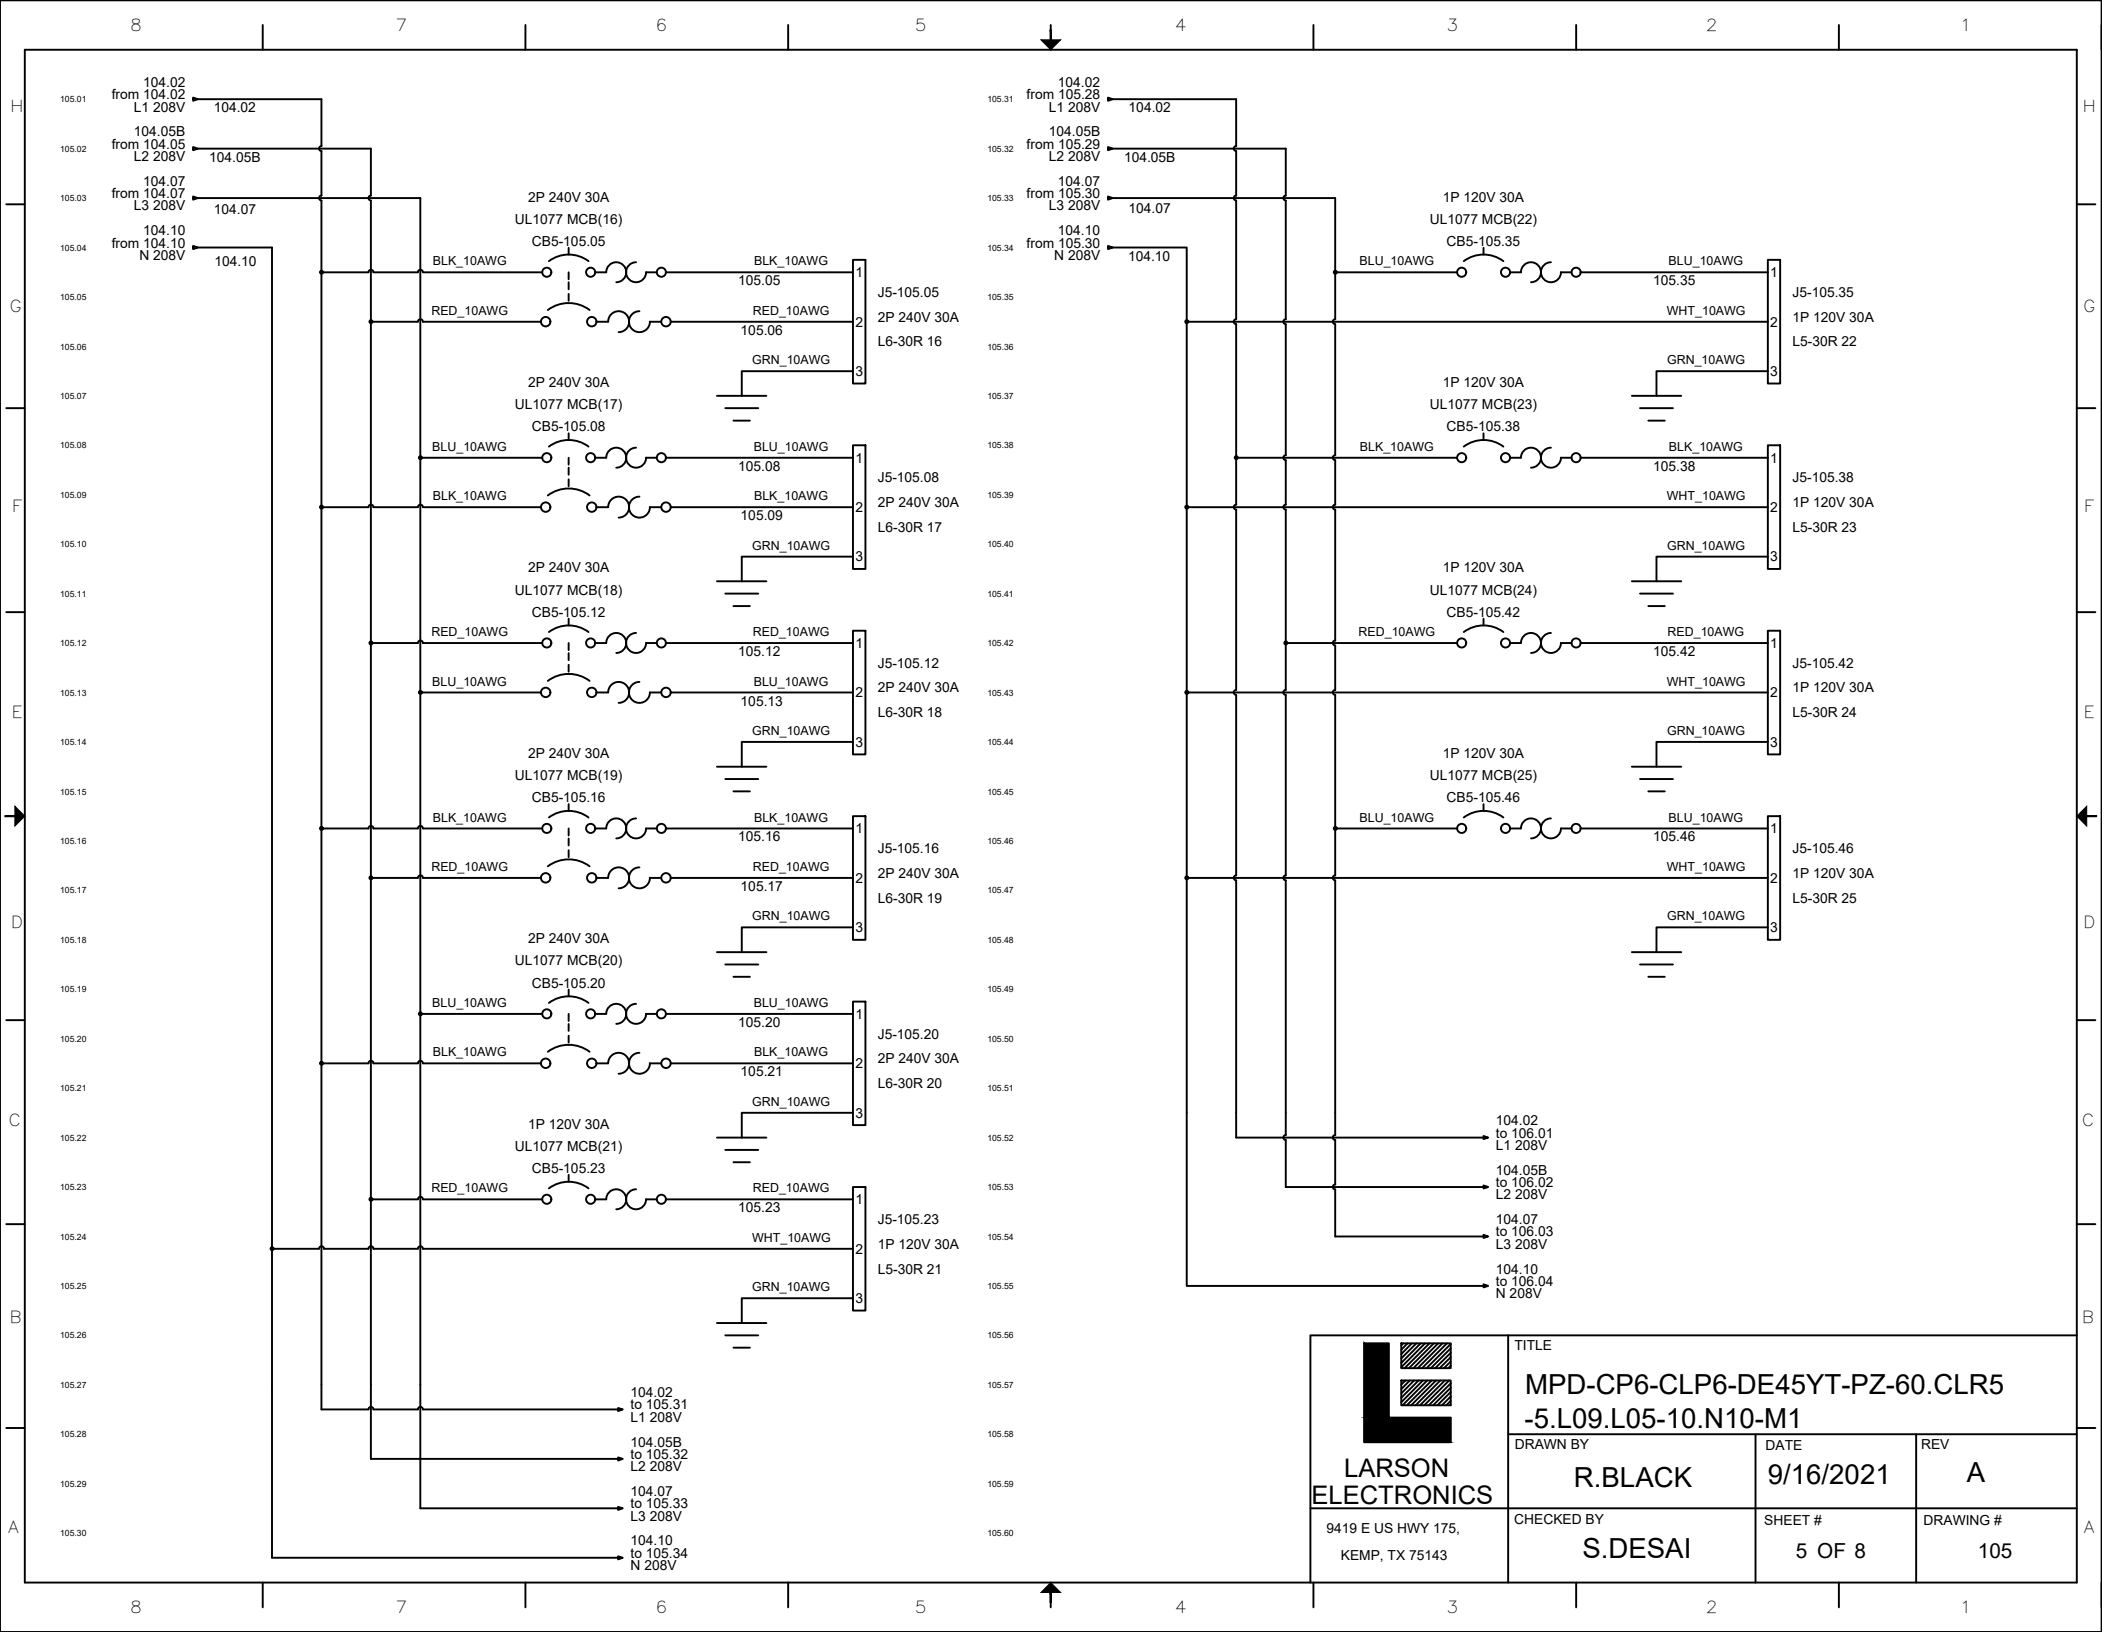

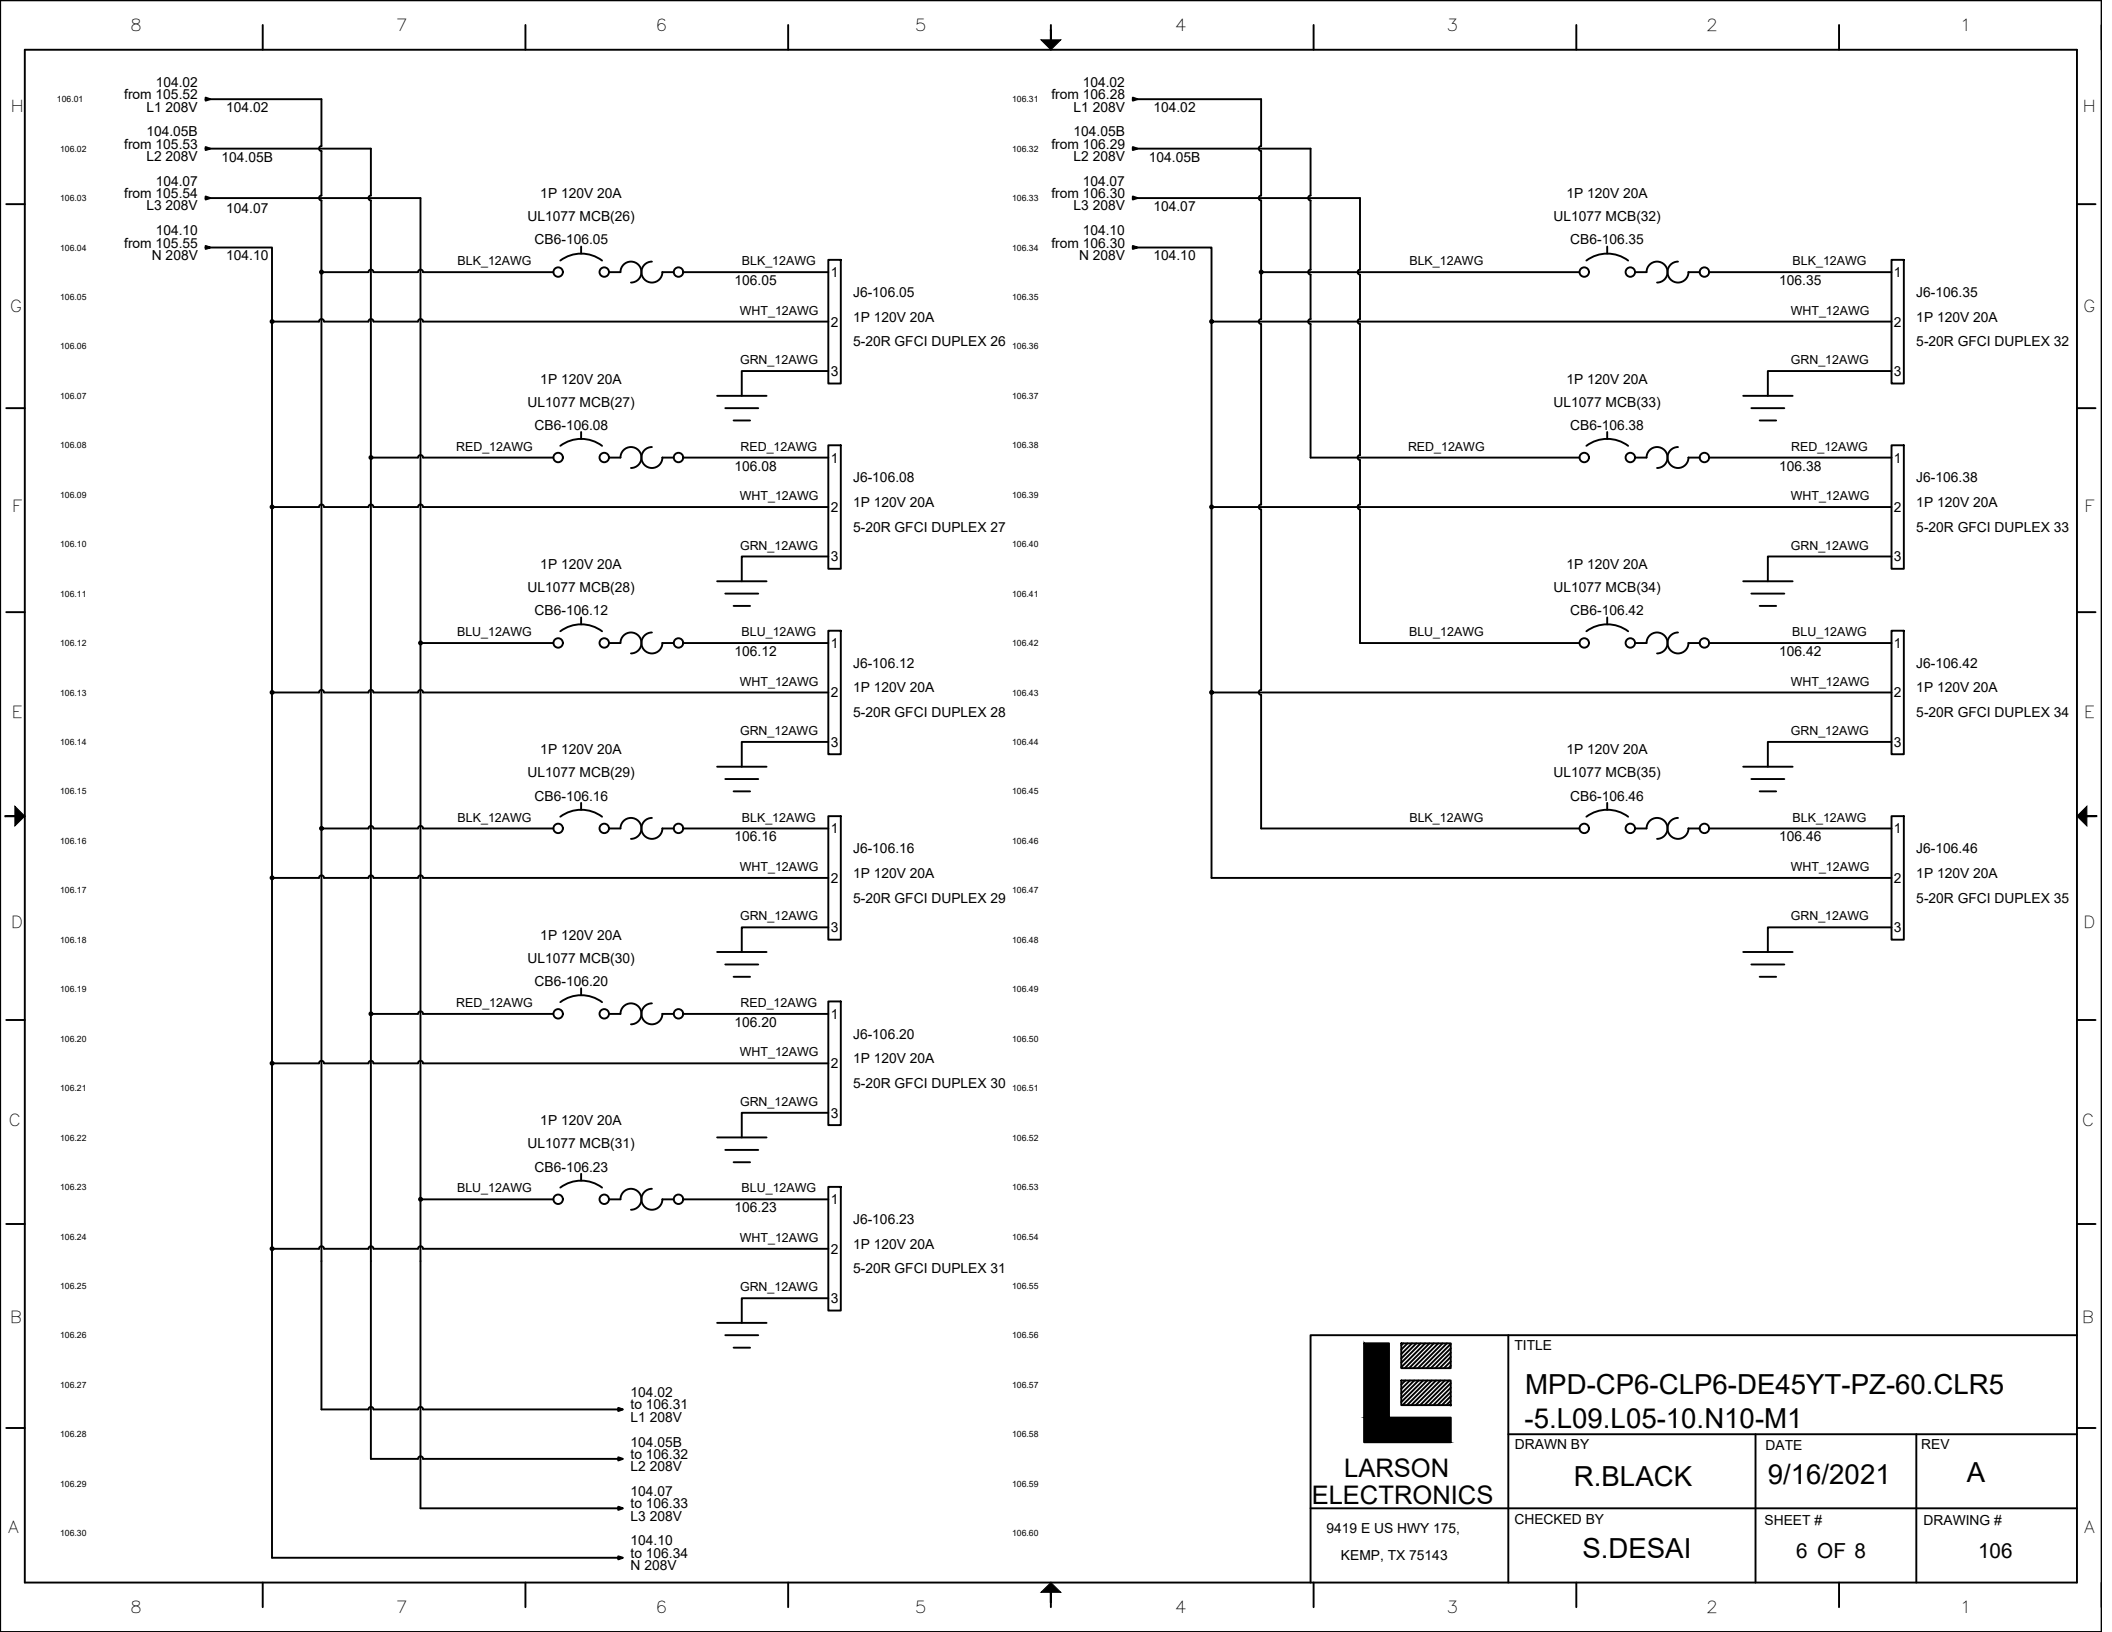

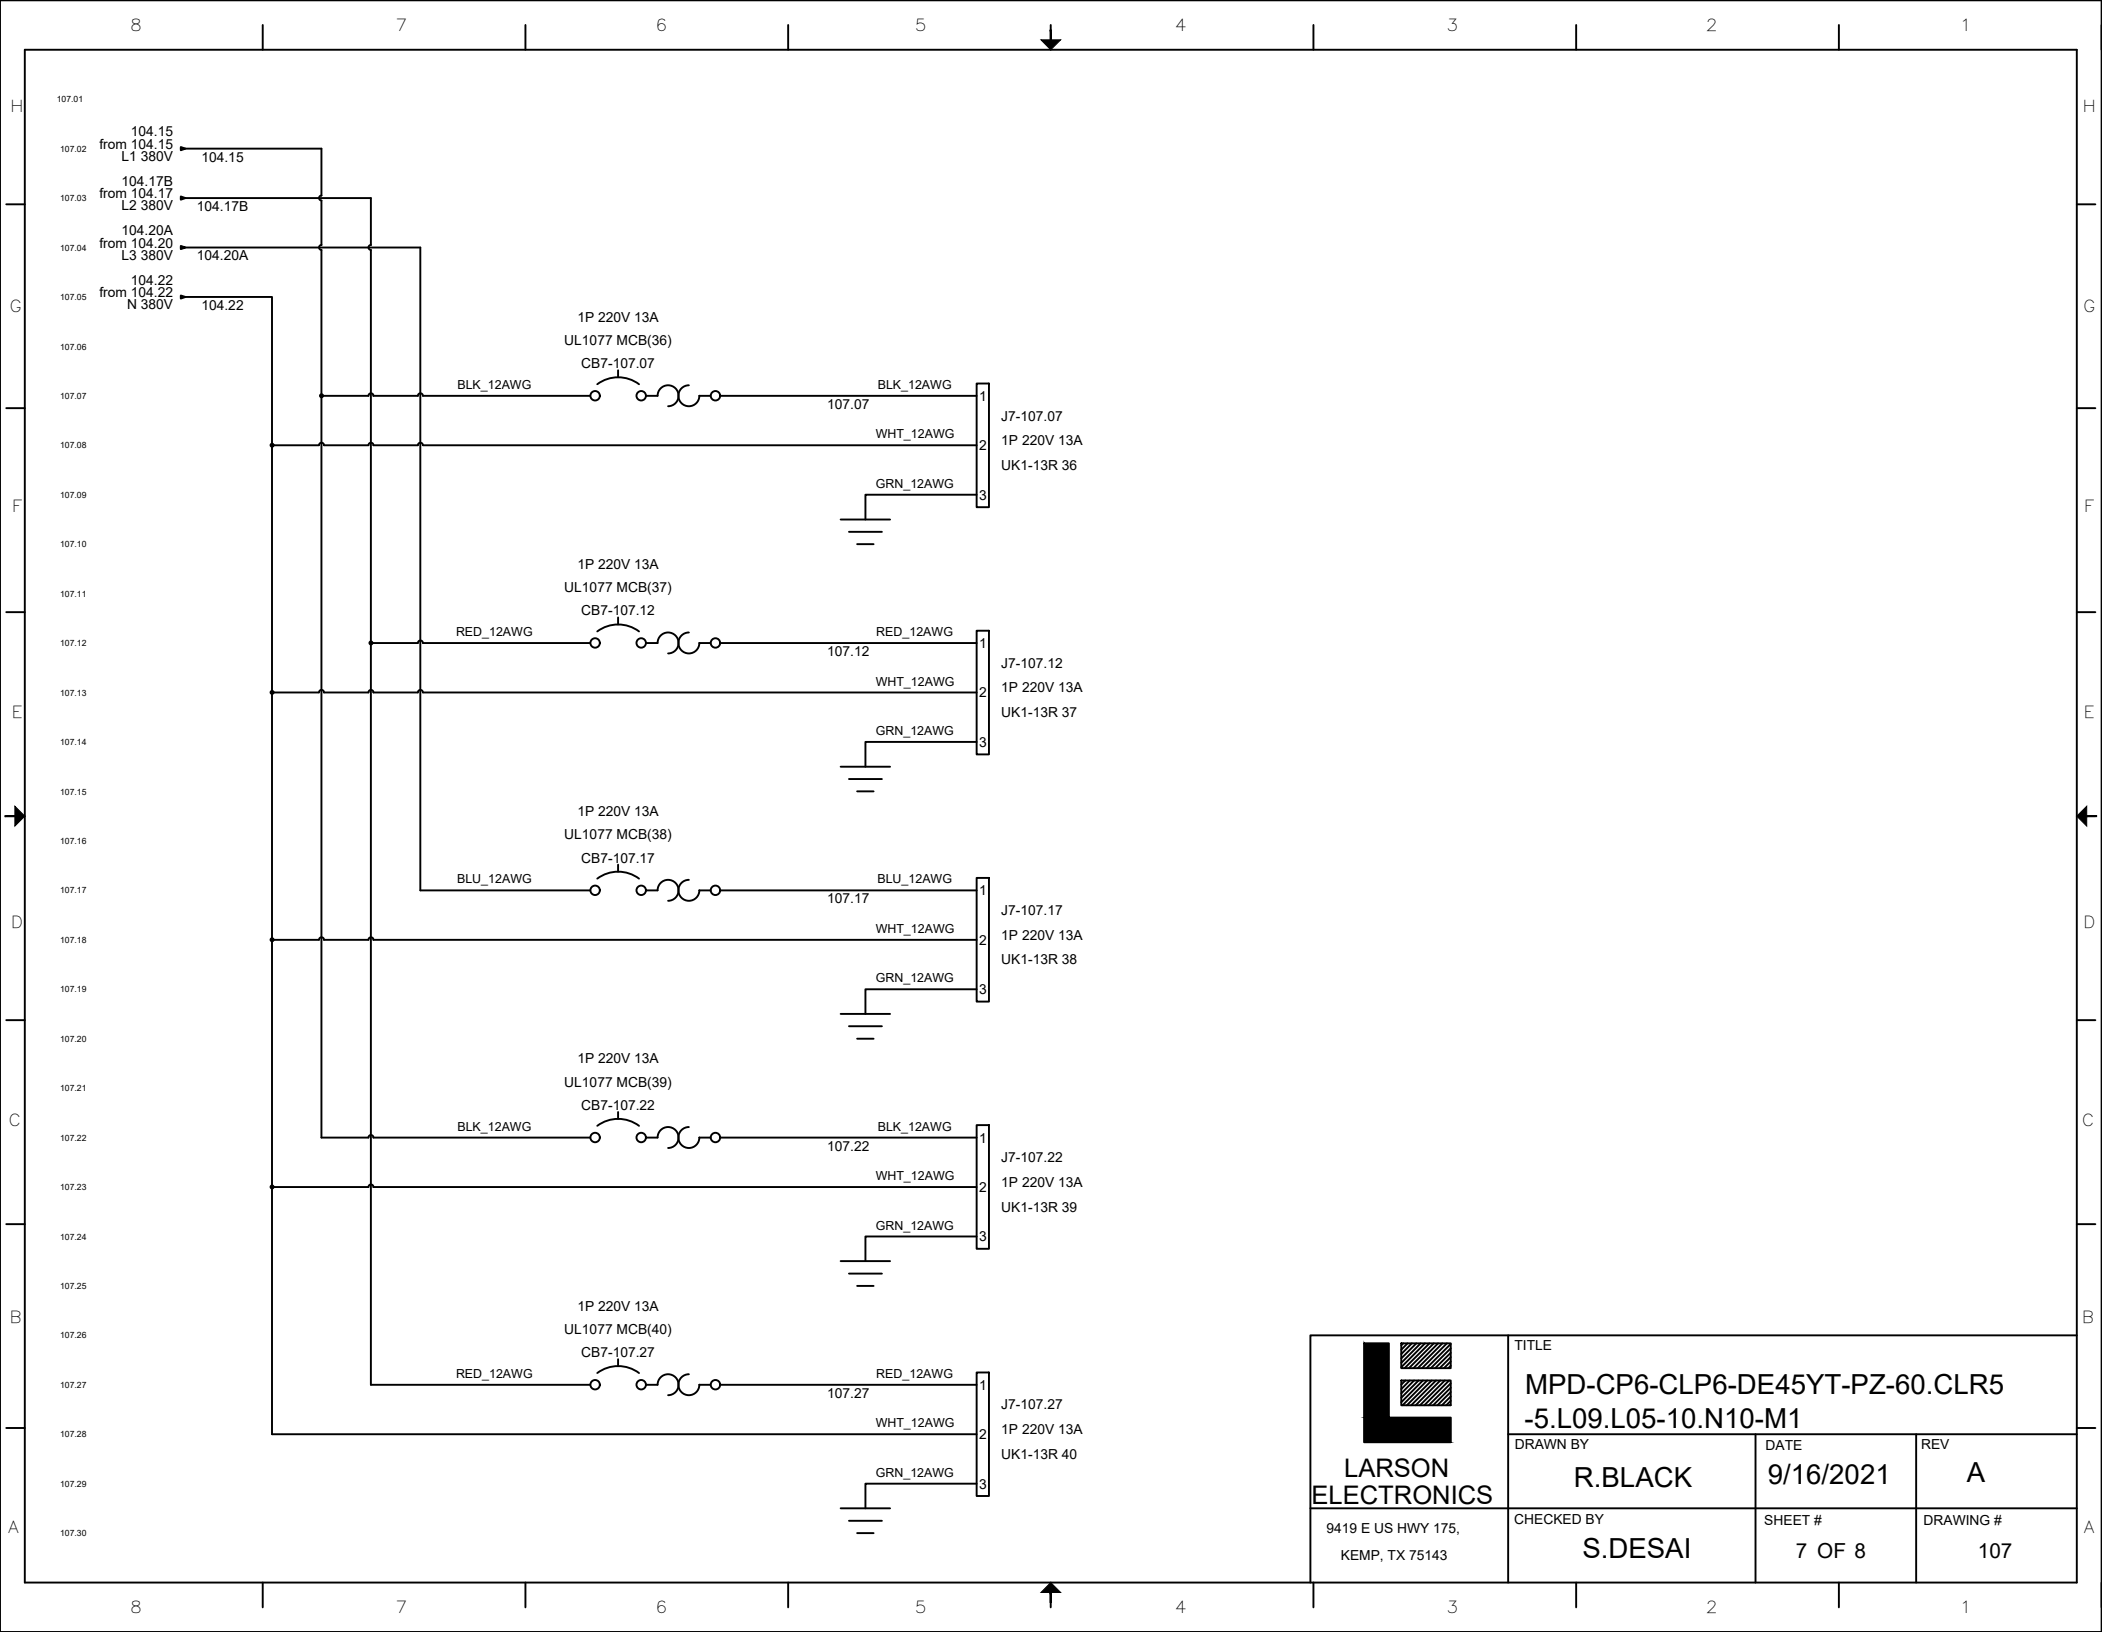

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-CP6-CLP6-DE45YT-PZ-60.CLR5 -5.L09.L05-10.N10-M1		
	DRAWN BY R.BLACK	DATE 9/16/2021	REV A
	CHECKED BY S.DESAI	SHEET # 7 OF 8	DRAWING # 107

	8	7	6	5	4	3	2	1	
H									H
G									G
F									F
E									E
D									D
C									C
B									B
A									A
	8	7	6	5	4	3	2	1	

TAGS	QTY	CATALOG	DESCRIPTION
J1-101.15 J1-101.25	2	UNV00002830	2-CONDUCTOR GROUND LUG 6-250MCM 3/8IN
J2-102.25 J2-102.34 J2-102.38 J2-102.42 J2-102.46 J2-102.51 J3-103.08 J3-103.13 J3-103.17	10	UNV00007118	L16-30R RECEPTACLE
P1-101.07 P1-101.15 P1-101.23	3	UNV00008712	400A MALE PANEL RECEPTACLE CAM LOCKS (GREEN)
P1-101.03 P1-101.11 P1-101.19	3	UNV00008713	400A MALE PANEL RECEPTACLE CAM LOCKS (BROWN)
P1-101.04 P1-101.12 P1-101.20	3	UNV00008714	400A MALE PANEL RECEPTACLE CAM LOCKS (ORANGE)
P1-101.06 P1-101.14 P1-101.22	3	UNV00008716	400A MALE PANEL RECEPTACLE CAM LOCKS (YELLOW)
J2-102.04 J2-102.08 J2-102.12 J2-102.16 J2-102.21	5	UNV00008902	CS8169 50A RECEPTACLE
J6-106.05 J6-106.08 J6-106.12 J6-106.16 J6-106.20 J6-106.23 J6-106.35 J6-106.38 J6-106.42 J6-106.46	10	UNV00014533	5-20R GFCI DUPLEX, 125/250V, 20A
J7-107.07 J7-107.12 J7-107.17 J7-107.22 J7-107.27	5	UK1-13R	UK 13 AMPERE-250 VOLT PANEL MOUNT OUTLET
J5-105.05 J5-105.08 J5-105.12 J5-105.16 J5-105.20	5	UNV00006736	L6-30 RECEPTACLE
J5-105.23 J5-105.35 J5-105.38 J5-105.42 J5-105.46	5	UNV00007122	L5-30 RECEPTACLE

TAGS	QTY	CATALOG	DESCRIPTION
CB1-101.03 CB1-101.11 CB1-101.19	3	UNV00014726	3P 480V 200A UL489
CB4-104.04	1	UNV00014728	3P 480V 60A UL489
CB5-105.05 CB5-105.08 CB5-105.12 CB5-105.16 CB5-105.20	5	UNV00014733	2P 250V 30A UL1077
CB7-107.07 CB7-107.12 CB7-107.17 CB7-107.22 CB7-107.27	5	UNV00015143	1P 277V 15A UL1077
CB6-106.05 CB6-106.08 CB6-106.12 CB6-106.16 CB6-106.20 CB6-106.23 CB6-106.35 CB6-106.38 CB6-106.42 CB6-106.46	10	UNV00015144	1P 277V 20A UL1077
CB5-105.23 CB5-105.35 CB5-105.38 CB5-105.42 CB5-105.46	5	UNV00015145	1P 277V 30A UL1077
CB4-104.16	1	UNV00015170	3P 480V 25A UL489
CB2-102.25 CB2-102.34 CB2-102.38 CB2-102.42 CB2-102.46 CB2-102.51 CB3-103.04 CB3-103.08 CB3-103.13 CB3-103.17	10	UNV00015172	3P 480V 30A UL489
CB2-102.04 CB2-102.08 CB2-102.12 CB2-102.16 CB2-102.21	5	UNV00015176	3P 480V 50A UL489
PD1-101.04 PD1-101.12 PD1-101.20	3	UNV00014768	Bus Bar 22 Holes, 10 in L, 4 in W 1/4 in T CU
PD4-103.15 PD4-103.17 PD4-103.20 PD4-103.22	4	UNV00015084	POWER DISTRIBUTION BLOCK 1-4 175A 600V FINGER SAFE
PD4-103.02 PD4-103.05 PD4-103.07 PD4-103.10	4	UNV00015085	POWER DISTRIBUTION BLOCK 2-12 570A 600V FINGER SAFE
XF4-103.16	1	UNV00002139	15KVA 480D TO 380Y/220 N3R
XF4-103.04	1	UNV00009054	45KVA 480D TO 208Y/120 N3R



LARSON
ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE

MPD-CP6-CLP6-DE45YT-PZ-60.CLR5
-5.L09.L05-10.N10-M1

DRAWN BY	DATE	REV
R.BLACK	9/16/2021	A
CHECKED BY	SHEET #	DRAWING #
S.DESAI	8 OF 8	108











Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards

ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the statements(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL Series from Larson Electronics LLC utilize components certified to NEC and CEC standards. Larson Electronics LLC specifies wiring device standard designations (e.g. NEMA 5-20R, NEMA L6-30R, CS8265C) in the electrical diagrams and spec sheet of each product. Unless specified, the brands of components used, which may vary based on availability at the time of build, include but are not limited to: Hubbell, Leviton, Molex, Daniel Woodhead, Legrand, Eaton, Thomas & Betts, Russel Stroll, Meltric, Mennekes, ABB Group, Emerson, Appleton, Crouse Hinds, Killark, R.Stahl, or other certified equipment manufacturers.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



TECHNICAL INFORMATION

POWDURA® POLYESTER TGIC POWDER COATING

PRODUCT DESCRIPTION

PLR2-60002

RAL 5010 GENT BLUE

POWDURA® Polyester TGIC Powder

Coatings are recommended for a broad range of interior/exterior functional and decorative applications.

Advantages:

- Provides excellent overbake resistance
- Good chemical resistance
- Very good outdoor exposure qualities
- Wide range of special effects available
- Available in a broad range of colors

Many applications, including:

Steel Furniture
Refrigeration
Electronic Cabinetry
Scaffolding
Electrical Equipment
Instrument Housings

Appliances
Sporting Goods

Storage: Powdura® Powder Coatings should be kept in a dry and cool area at temperatures below 80°F (27°C). When not in use, store powder in sealed containers: fine powders are hygroscopic.

Substrate Preparation: Substrate should be free of grease, oil, dirt, fingerprints, drawing compounds, any contamination, and surface preparation treatments to ensure optimum adhesion and coating performance properties. The use of a chemical conversion coating prior to the application of a powder coating is strongly recommended.

Testing: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full-scale application.

CAUTIONS

Thoroughly review product SDS prior to using this product. Please consult your local sales representative or your local Sherwin-Williams facility for additional information.

Special Advisory: River texture type finishes are unique finishes that may vary with application, film thickness and cure conditions. Light colors and very dark colors may occasionally show colored specks that appear as contamination.

This is the nature of this type of finish and cannot be predicted or controlled. Thorough cleaning is required when switching to a normal smooth powder coating to prevent craters in the smooth finish.

APPLICATION

Cure Schedule: 10 MIN @ 400F

Film Thickness Range(mils): 3.0-5.0

ATTRIBUTES

Specific Gravity(g/ml): 1.72

Coverage at 1.0 Mil(ft²/lb): 112.4

60° Gloss: 15-30
(ASTM D-523)

Adhesion: 5B
(ASTM D-3359)

Flexibility: Pass 1/8"
(ASTM D-522)

Pencil Hardness: H-2H
(ASTM D-3363)

Impact Resistance(in.lb): Dir 100 in-lbs
(ASTM D-2794) Rev 100 in-lbs

Note: Performance measured using 24-gauge Bonderite® 1000 test panels.

Shelf Life: 12 Months

Sherwin-Williams recommends that all material be used in FIFO order (first in - first out). Materials that exceed the recommended shelf life should be tested prior to use.

Note:

Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating and opinions stated above pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application, which are not known, or under our control, The Sherwin-Williams Company cannot make any warranties or guaranties as to the end results.

08 00

Grove City Product Mod

24-Mar-2020



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MGL, MPD, MGS, WAL Series industrial line of portable power distribution systems are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

[<- Back](#)

Product Description

Title: STAGE & STUDIO PORTABLE WIRING COMPARTMENTS
Company: LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information: Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

[Intertek Home](#)
[Product Directories](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: INDUSTRIAL CONTROL EQUIPMENT

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Industrial Control Panels For General Use.

Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.

Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Evaluated Standards:

AISC: Structural steel skid design

NFPA 70: National Electrical Code

ASTM A36: Standard Specification for Carbon Structural Steel

ASTM A123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM A489: Standard Specification for Carbon Steel Lifting Eyes

ASTM A502: Standard Specification for Rivets, Steel, Structural

ASTM A563: Standard Specification for Carbon and Alloy Steel Nuts

ASTM A500: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes

ASTM B172: Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors

ASTM D7803: Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Powder Coating

SAE J429: Mechanical and Material Requirements for Externally Threaded Fasteners

AWS D1.1: Structural Welding – Steel

ICEA S-58-679: Standard for Control, Instrumentation and Thermocouple Extension Conductor Identification

ICEA S-75-381: Portable and Power Feeder Cables for Use in Mines and Similar Applications

NEMA OFP 1-2017: Protection of Receptacle Outlets in Wet Locations According to the National Electrical Code



NEMA PB 1-2011: Panelboards

NEMA ST 20-2014: Dry Type Transformers for General Applications

NEMA WD 1-1999 (R2015): General Color Requirements for Wiring Devices

ANSI C80.1-2015: American National Standard for Electric Rigid Steel Conduit

ANSI C119.4-2016: American National Standard for Electric Connectors

ANSI Z535.4-2011: American National Standard for Product Safety Signs and Labels

ANSI/IEC 60529-2004 (R2011): American National Standard for Degrees of Protection
Provided by Enclosures (IP Code)

Signed for and on behalf of: Larson Electronics, LLC

Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas

Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The MGL, MPD, MGS, WAL series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager

Frequently Asked Questions (FAQ)