Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1

10 kVA Transformer - 480V to 120/240V Portable MiniPDU - (2) 30A and (4) 20A Outlets - 30' Cord w/ 330P7W IEC 60309 Pin & Sleeve Plug

Product ID: 280001



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 Mini PDU

Primary Voltage: 480V AC 1P 60 Hz
Line-In Cable: 30' 10/3 SOOW Cable
Line-In Cord Cap: 330P7W IEC 60309 Pin & Sleeve Plug [480 V]
Primary Breakers: (1) 25A 2P MCB [480 V]
Transformer: 10KVA 480 V to 120/240 V 1PH N3R
Secondary Voltage: 120/240 V AC 1P 60 Hz
Secondary Panel: 120/240 V 1PH 41.7A MLO Hinged N3R
Secondary Breakers: (2) 30A 2P MCB [250 V]; (4) 20A 1P MCB [125 V]
Secondary Outlets: (2) L6-30R NEMA Standard Receptacle [250 V]; (4) 5-20R NEMA DPLX GFCI [125 V]
Secondary Protection: MCB Circuit Breakers; GFCI's; Weatherproof Covers
Dimensions: 40"-L x 40"-W x 48"-H (*Please note that dimensions are approximate and subject to change*)
Weight: 350 lb (*Please note that weight is approximate and subject to change*)
Form Factor: Blue Powder Coated MGL w/ No Flat Tires
Cart Material: Steel
Cart Finish: High-strength TGIC Polyester Powder Coated Blue
All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Ratings/Features

NRTL Certified to UL 1640
NEMA 3R Weatherproof
GFCI Outlets
Portable Casters
Top Mounted Push Handle for Portability
Top Located Cord Management
Max Primary OCP: 25 A @ 480 V
Max Secondary OCP: 41.7 A @ 240 V

Special Orders - Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-214-616-6180
Fax:1-903-498-3364
E-mail: sales@larsonelectronics.com

Made in Texas


The MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 from Larson Electronics is a Portable Power Distribution System that steps down 480 V AC 50/60 Hz input voltage to 120/240 V AC output voltage. This weatherproof portable power distribution unit allows operators to plug into 480 V generators and welding outlets via a 330P7W IEC 60309 Pin &

Sleeve Plug [480 V].
The MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 portable wheeled mini PDU from Larson Electronics is built to provide operators with a reliable source of 120/240 V power. This compact mini PDU is designed for portability and convenience as well as durability. Featuring an elevated base platform for protection from standing water and weatherproof construction, the MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 is ideal for powering 120 V and 240 V equipment and lighting in construction, entertainment, job-site, marine, and outdoor locations where 480V generators are providing the power.

Operation:

- Primary Voltage: 1-phase 480 V AC
- Primary Receptacles: N/A
- Transformer: 10KVA 480 V to 120/240 V 1PH N3R
- Secondary Panel: 120/240 V 1PH 41.7A MLO Hinged N3R
- Secondary Voltage: 1-phase 120/240 V AC
- Secondary Breakers: (2) 30A 2P MCB [250 V]; (4) 20A 1P MCB [125 V]
- Secondary Outlets: (2) L6-30R NEMA Standard Receptacle [250 V]; (4) 5-20R NEMA DPLX GFCI [125 V]

*See specification table at the top of the page for more information about the power distribution system.
The housing on the MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 is constructed from powder coated steel with a NEMA 3R enclosure rating. The angled base and low center of gravity ensure this low voltage transform does not tip over when in the field. The entire unit is powder coated with glossy blue finish for corrosion resistances and aesthetics. The assembly is mounted atop four swivel polyurethane casters, two standard swivel and two locking swivel, aiding in transportation within the job site. A top located adjustable push handle allows operators to guide this unit through the workspace.
The MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1 portable mini PDU system primary voltage is brought in via 30` of 10/3 chemical and abrasion resistant SOOW cable that is fitted with a 330P7W IEC 60309 Pin & Sleeve Plug [480 V]. A top located cord management system allows operators to roll up line-in cord when not in use, and roll up the extra slack in the power cable during use. A primary voltage indicator light illuminates when the primary side of the transformer is connected to live voltage.
Larson Electronics is a manufacturer and as such can build transformers to your specifications. Although we carry several models of power distribution systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com

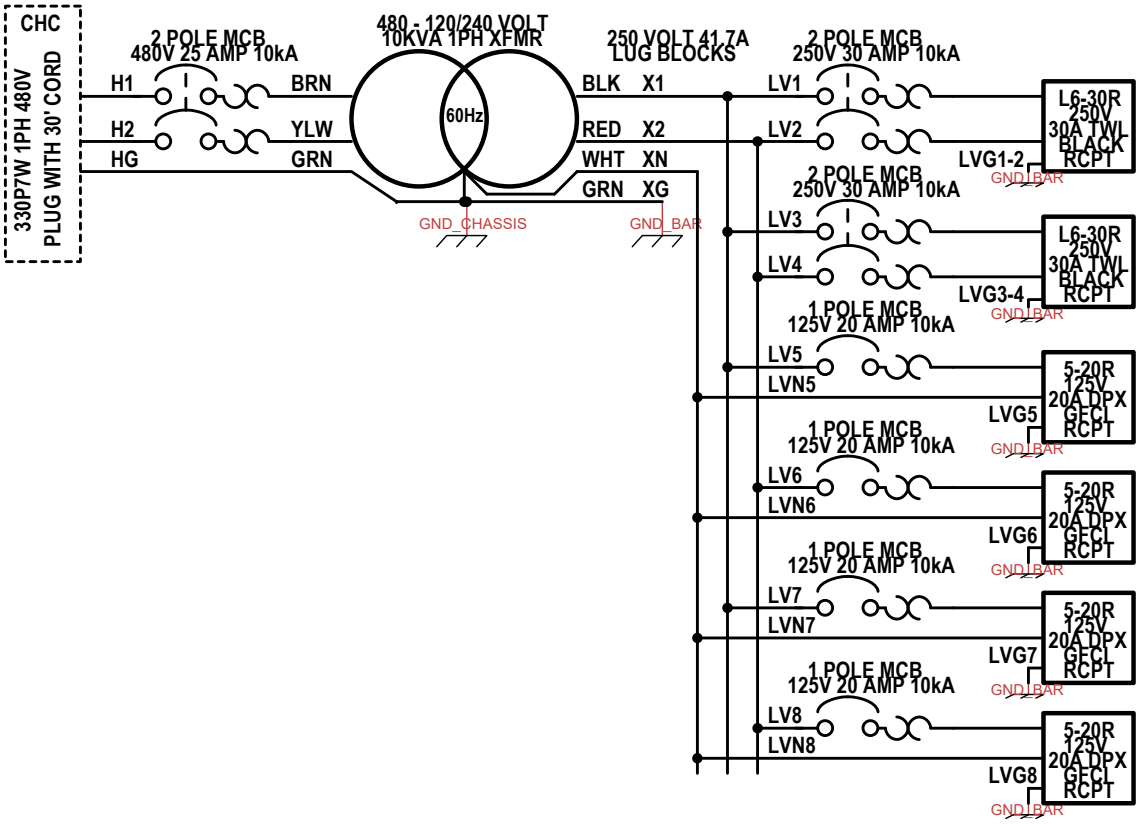

WIRE LEGEND


ID	TYPE	DESCRIPTION	WIRE SIZE
CHC	CORD	600V TYPE SOOW	#10/3 AWG cu
H1	CABLE	600V THHN BROWN	#10 AWG cu
H2	CABLE	600V THHN YELLOW	#10 AWG cu
HG	CABLE	600V THHN GREEN	#10 AWG cu
X1	CABLE	600V THHN BLACK	#8 AWG cu
X2	CABLE	600V THHN RED	#8 AWG cu
XN	CABLE	600V THHN WHITE	#8 AWG cu
XG	CABLE	600V THHN GREEN	#10 AWG cu
LV1	CABLE	600V THHN BLACK	#10 AWG cu
LV2	CABLE	600V THHN RED	#10 AWG cu
LV3	CABLE	600V THHN BLACK	#10 AWG cu
LV4	CABLE	600V THHN RED	#10 AWG cu
LV5	CABLE	600V THHN BLACK	#12 AWG cu
LV6	CABLE	600V THHN RED	#12 AWG cu
LV7	CABLE	600V THHN BLACK	#12 AWG cu
LV8	CABLE	600V THHN RED	#12 AWG cu
LVG1-2	CABLE	600V THHN GREEN	#10 AWG cu
LVG3-4	CABLE	600V THHN GREEN	#10 AWG cu
LVG5	CABLE	600V THHN GREEN	#12 AWG cu
LVG6	CABLE	600V THHN GREEN	#12 AWG cu
LVG7	CABLE	600V THHN GREEN	#12 AWG cu
LVG8	CABLE	600V THHN GREEN	#12 AWG cu
LVN5	CABLE	600V THHN WHITE	#12 AWG cu
LVN6	CABLE	600V THHN WHITE	#12 AWG cu
LVN7	CABLE	600V THHN WHITE	#12 AWG cu
LVN8	CABLE	600V THHN WHITE	#12 AWG cu

Title: MPD-CD1-309.30A-SE10SZ-CZ-2.L09-4.N10-M1		
Author: David Downs		
File: 1PH 10KVA 120-240V 41.7A 1PH MLO 2xL6-30R		Document
Revision: 1.0	Date: 06/08/2021	Sheets: 1 of 1

REV	DESCRIPTION	DATE
A	PRODUCTION RELEASE	8/28/2023


MPD-CD1-309.30A-SE10SZ-CZ -2.L09-4.N10-M1

LARSON ELECTRONICS®

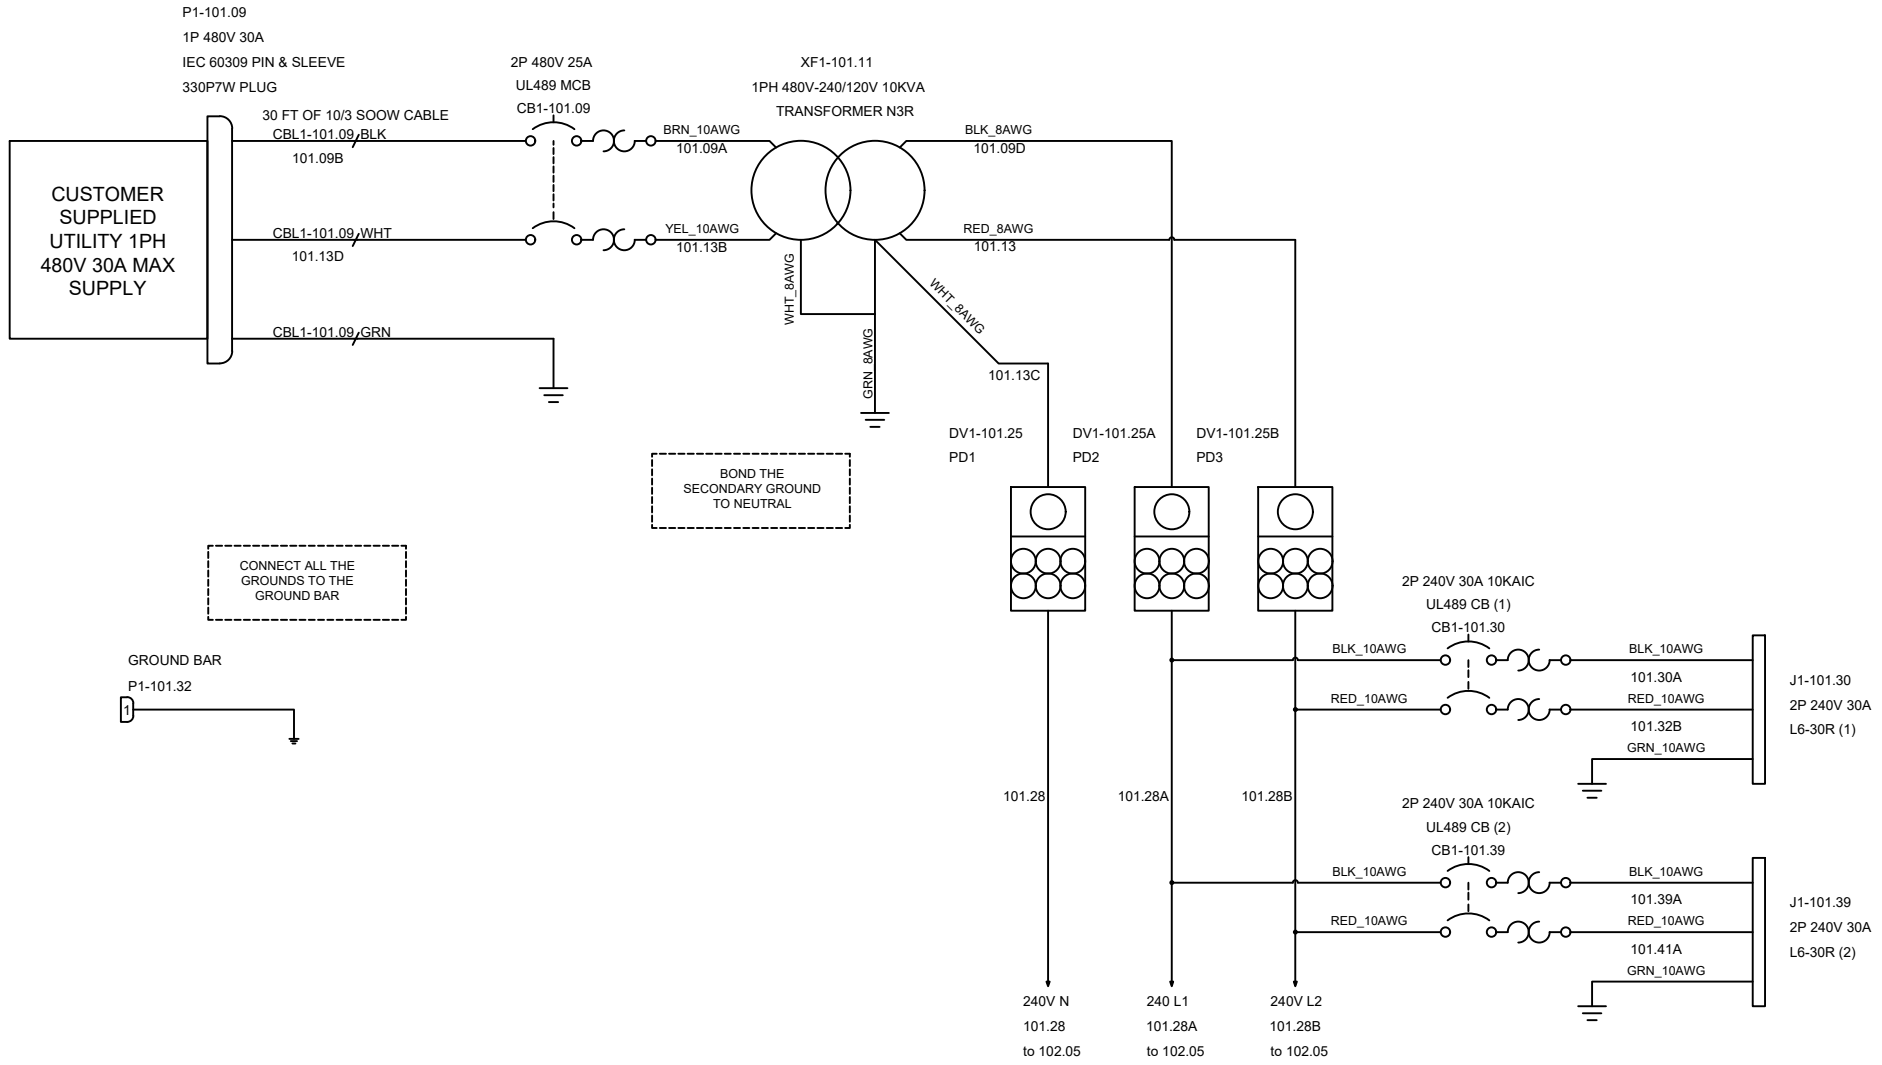

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE			
MPD-CD1-309.30A-SE10SZ-CZ -2.L09-4.N10-M1			
DRAWN BY	DATE	REV	
S.Desai	8/29/2023	A	
CHECKED BY	SHEET #	DRAWING #	
J.Maldonado	1 OF 2	101	

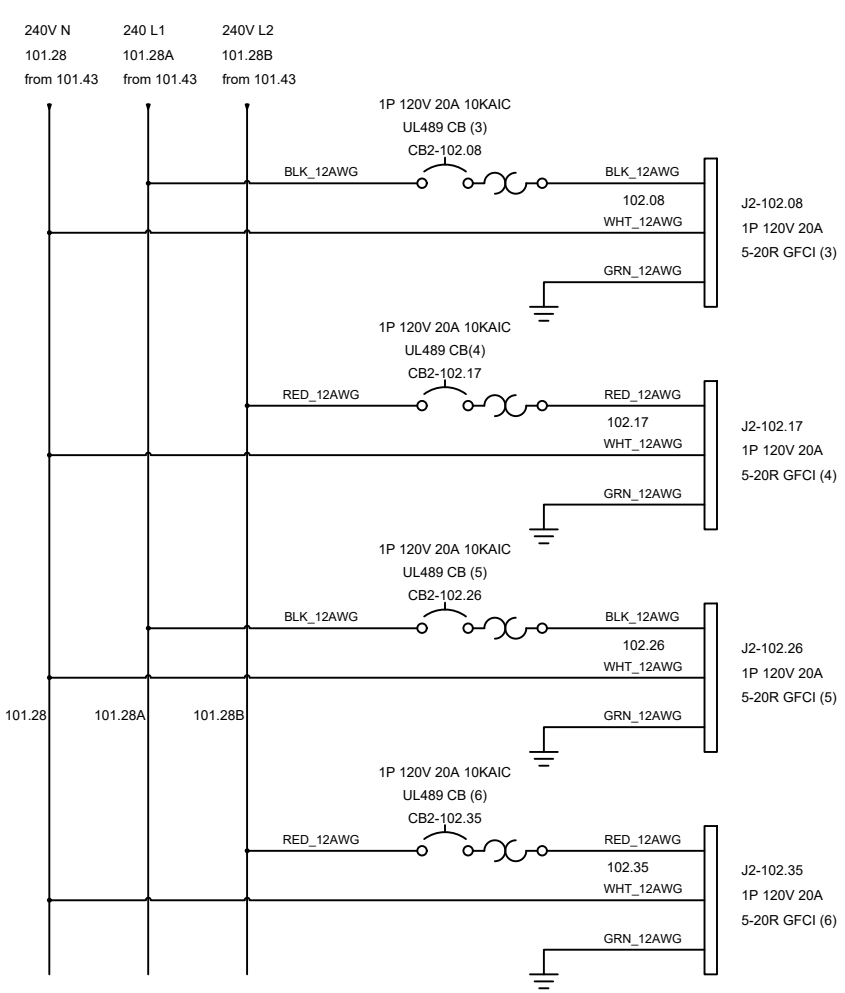

TAGS	QTY	CATALOG	DESCRIPTION
J1-101.30 J1-101.39	2	UNV00006736	2P 250V 30A L6-30R LOCKING RECEPTACLE
P1-101.09	1	UNV00013695	2P 3W 480V 30A IEC 60309 PIN AND SLEEVE 330P7W PLUG
P1-101.32	1	UNV00013942C	GROUN BAR KIT
J2-102.08 J2-102.17 J2-102.26 J2-102.35	4	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
CB1-101.09	1	UNV00015170	Din Rail Breaker 25A 3P 480V 489
CB2-102.08 CB2-102.17 CB2-102.26 CB2-102.35	4	UNV00017491	1P 125V 20A 10KA UL489 DIN RAIL MOUNT BREAKER
CB1-101.30 CB1-101.39	2	UNV00017628	2P 240V 30A UL489 CIRCUIT BREAKER
DV1-101.25 DV1-101.25A DV1-101.25B	3	UNV00015084	POWER DISTRIBUTION BLOCK 175 A 600V 1-4 OPENING
CBL1-101.09	1	UNV00007526	10/3 SOOW CABLE
XF1-101.11	1	UNV00013878	240-120V1PH 10KVA TRANSOFRMER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE: MPD-CD1-309.30A-SE10SZ-CZ -2.L09-4.N10-M1

DRAWN BY	DATE	REV
S.Desai	8/29/2023	A
CHECKED BY	SHEET #	DRAWING #
J.Maldonado	2 OF 2	102


CAUTION
ON / OFF
WARNING
CAUTION
ON / OFF
WARNING
LARSON


CAUTION
ON / OFF
WARNING
CAUTION
ON / OFF
WARNING
LARSON
ELECTRONICS




LARSON ELECTRONICS
Temporary Power Distribution Substation
Instruction Manual
Safety Warnings
1
2
3
4
5
240 V
30 AMP
120 V
20 AMP

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards
ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the statements(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL Series from Larson Electronics LLC utilize components certified to NEC and CEC standards. Larson Electronics LLC specifies wiring device standard designations (e.g. NEMA 5-20R, NEMA L6-30R, CS8265C) in the electrical diagrams and spec sheet of each product. Unless specified, the brands of components used, which may vary based on availability at the time of build, include but are not limited to: Hubbell, Leviton, Molex, Daniel Woodhead, Legrand, Eaton, Thomas & Betts, Russel Stroll, Meltric, Mennekes, ABB Group, Emerson, Appleton, Crouse Hinds, Killark, R.Stahl, or other certified equipment manufacturers.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

TECHNICAL INFORMATION

POWDURA® POLYESTER TGIC
POWDER COATING

PRODUCT DESCRIPTION

PLR2-60002
RAL 5010 GENT BLUE

POWDURA® Polyester TGIC Powder Coatings are recommended for a broad range of interior/exterior functional and decorative applications.

Advantages:

- Provides excellent overbake resistance
- Good chemical resistance
- Very good outdoor exposure qualities
- Wide range of special effects available
- Available in a broad range of colors

Many applications, including:
Steel Furniture
Refrigeration
Electronic Cabinetry
Scaffolding
Electrical Equipment
Instrument Housings

Appliances
Sporting Goods

Storage: Powdura® Powder Coatings should be kept in a dry and cool area at temperatures below 80°F (27°C). When not in use, store powder in sealed containers: fine powders are hygroscopic.

Substrate Preparation: Substrate should be free of grease, oil, dirt, fingerprints, drawing compounds, any contamination, and surface preparation treatments to ensure optimum adhesion and coating performance properties. The use of a chemical conversion coating prior to the application of a powder coating is strongly recommended.

Testing: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full-scale application.

CAUTIONS

Thoroughly review product SDS prior to using this product. Please consult your local sales representative or your local Sherwin-Williams facility for additional information.

Special Advisory: River texture type finishes are unique finishes that may vary with application, film thickness and cure conditions. Light colors and very dark colors may occasionally show colored specks that appear as contamination. This is the nature of this type of finish and cannot be predicted or controlled. Thorough cleaning is required when switching to a normal smooth powder coating to prevent craters in the smooth finish.

APPLICATION

Cure Schedule:	10 MIN @ 400F
Film Thickness Range(mils):	3.0-5.0

ATTRIBUTES

Specific Gravity(g/ml):	1.72
Coverage at 1.0 Mil(ft^2/lb):	112.4
60° Gloss: (ASTM D-523)	15-30
Adhesion: (ASTM D-3359)	5B
Flexibility: (ASTM D-522)	Pass 1/8"
Pencil Hardness: (ASTM D-3363)	H-2H
Impact Resistance(in.lb): (ASTM D-2794)	Dir 100 in-lbs Rev 100 in-lbs

Note: Performance measured using 24-gauge Bonderite® 1000 test panels.

Shelf Life:	12 Months

Sherwin-Williams recommends that all material be used in FIFO order (first in - first out). Materials that exceed the recommended shelf life should be tested prior to use.

Note:
Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating and opinions stated above pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application, which are not known, or under our control, The Sherwin-Williams Company cannot make any warranties or guaranties as to the end results.

08 00

Grove City Product Mod

24-Mar-2020

Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MGL, MPD, MGS, WAL Series industrial line of portable power distribution systems are considered "ARTICLES" under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

i. Which is formed to a specific shape or design during manufacture;
ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

<- Back

Product Description

Title:	STAGE & STUDIO PORTABLE WIRING COMPARTMENTS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

<- Back

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

intertek
Total Quality. Assured.



<- Back

Product Description

Title:	INDUSTRIAL CONTROL EQUIPMENT
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Industrial Control Panels For General Use. Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

<- Back

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478 (or +1-847-660-7407)
Email
etldirectory@intertek.com

Intertek Home
Product Directories
DLP on mobile devices

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Evaluated Standards:

AISC: Structural steel skid design
NFPA 70: National Electrical Code
ASTM A36: Standard Specification for Carbon Structural Steel
ASTM A123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A489: Standard Specification for Carbon Steel Lifting Eyes
ASTM A502: Standard Specification for Rivets, Steel, Structural
ASTM A563: Standard Specification for Carbon and Alloy Steel Nuts
ASTM A500: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM B172: Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors
ASTM D7803: Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Powder Coating
SAE J429: Mechanical and Material Requirements for Externally Threaded Fasteners
AWS D1.1: Structural Welding – Steel
ICEA S-58-679: Standard for Control, Instrumentation and Thermocouple Extension Conductor Identification
ICEA S-75-381: Portable and Power Feeder Cables for Use in Mines and Similar Applications
NEMA OFP 1-2017: Protection of Receptacle Outlets in Wet Locations According to the National Electrical Code

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

NEMA PB 1-2011: Panelboards
NEMA ST 20-2014: Dry Type Transformers for General Applications
NEMA WD 1-1999 (R2015): General Color Requirements for Wiring Devices
ANSI C80.1-2015: American National Standard for Electric Rigid Steel Conduit
ANSI C119.4-2016: American National Standard for Electric Connectors
ANSI Z535.4-2011: American National Standard for Product Safety Signs and Labels
ANSI/IEC 60529-2004 (R2011): American National Standard for Degrees of Protection Provided by Enclosures (IP Code)

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The MGL, MPD, MGS, WAL series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union (“EU”) Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances (“REACH”).

REACH does not apply to manufactured products which are referred to as “completed articles”. Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Frequently Asked Questions (FAQ)