

EPSW-6A

Explosion Proof Switch for EPL-48-2L Series

Product ID: 284796



Image: EPSW-6A

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPSW-6A Explosion Proof Tumbler Switch

Switch Voltage Rating: 120-277 VAC

Switch Current Rating: 6 Amps- 1 HP @120 Vac & 2 HP @ 240 Vac

Grounding: Single Internal Housing Ground Screw

Configuration: Feed Through, Front Switch

Hub Qty: (2) Feed Through or (1) Dead End

Hub Size:) Feed Through or (1) Dead End

Unit Materials: Box/Receptacle- Malleable Aluminum, Sealing Chamber-Aluminum

Finish: Triple-coat—Zinc Electroplate, Chromate, Epoxy powder coat

Insulation: Integral Bushings in Conductor Openings

Mounting: External Mounting Lugs on Body

Unit Dimensions: 3.00"-W X 4.69"-D X 6.13 "-L

Switch Type: Single Pole

Ambient Operating Temp: -20°C to +50°C

Certifications - Compliance

Class 1 Division 1 & 2 Groups C, D

Class 2 Division 1 & 2 Groups E, F, G

Class 3

NEMA 7 Groups C & D

NEMA 9 Groups E, F, G

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Fax: 1-903-765-7664


E-mail: sales@larsonelectronics.com

The Larson Electronics EPSW-6A Explosion Proof Feed Through Tumbler Switch is UL Listed Class 1 Division 1 & 2 and Class 2 Division 1 & 2 and provides a safe and secure method for operators to interrupt power before connecting and disconnecting portable or stationary electrical devices and equipment in hazardous locations.

This explosion proof tumbler switch is ideal for operators seeking a high quality explosion proof switch rated for use in hazardous areas designated Class 1 Division 1 and Class 2

8	7	6	5	4	3	2	1	
H	REV	DESCRIPTION						DATE
	A	PRODUCTION RELEASE						07/22/2022
G	EPSW-6A-0.75IN-FT-1P 							
F								
E								
D								
C								
B								
A								
8								7



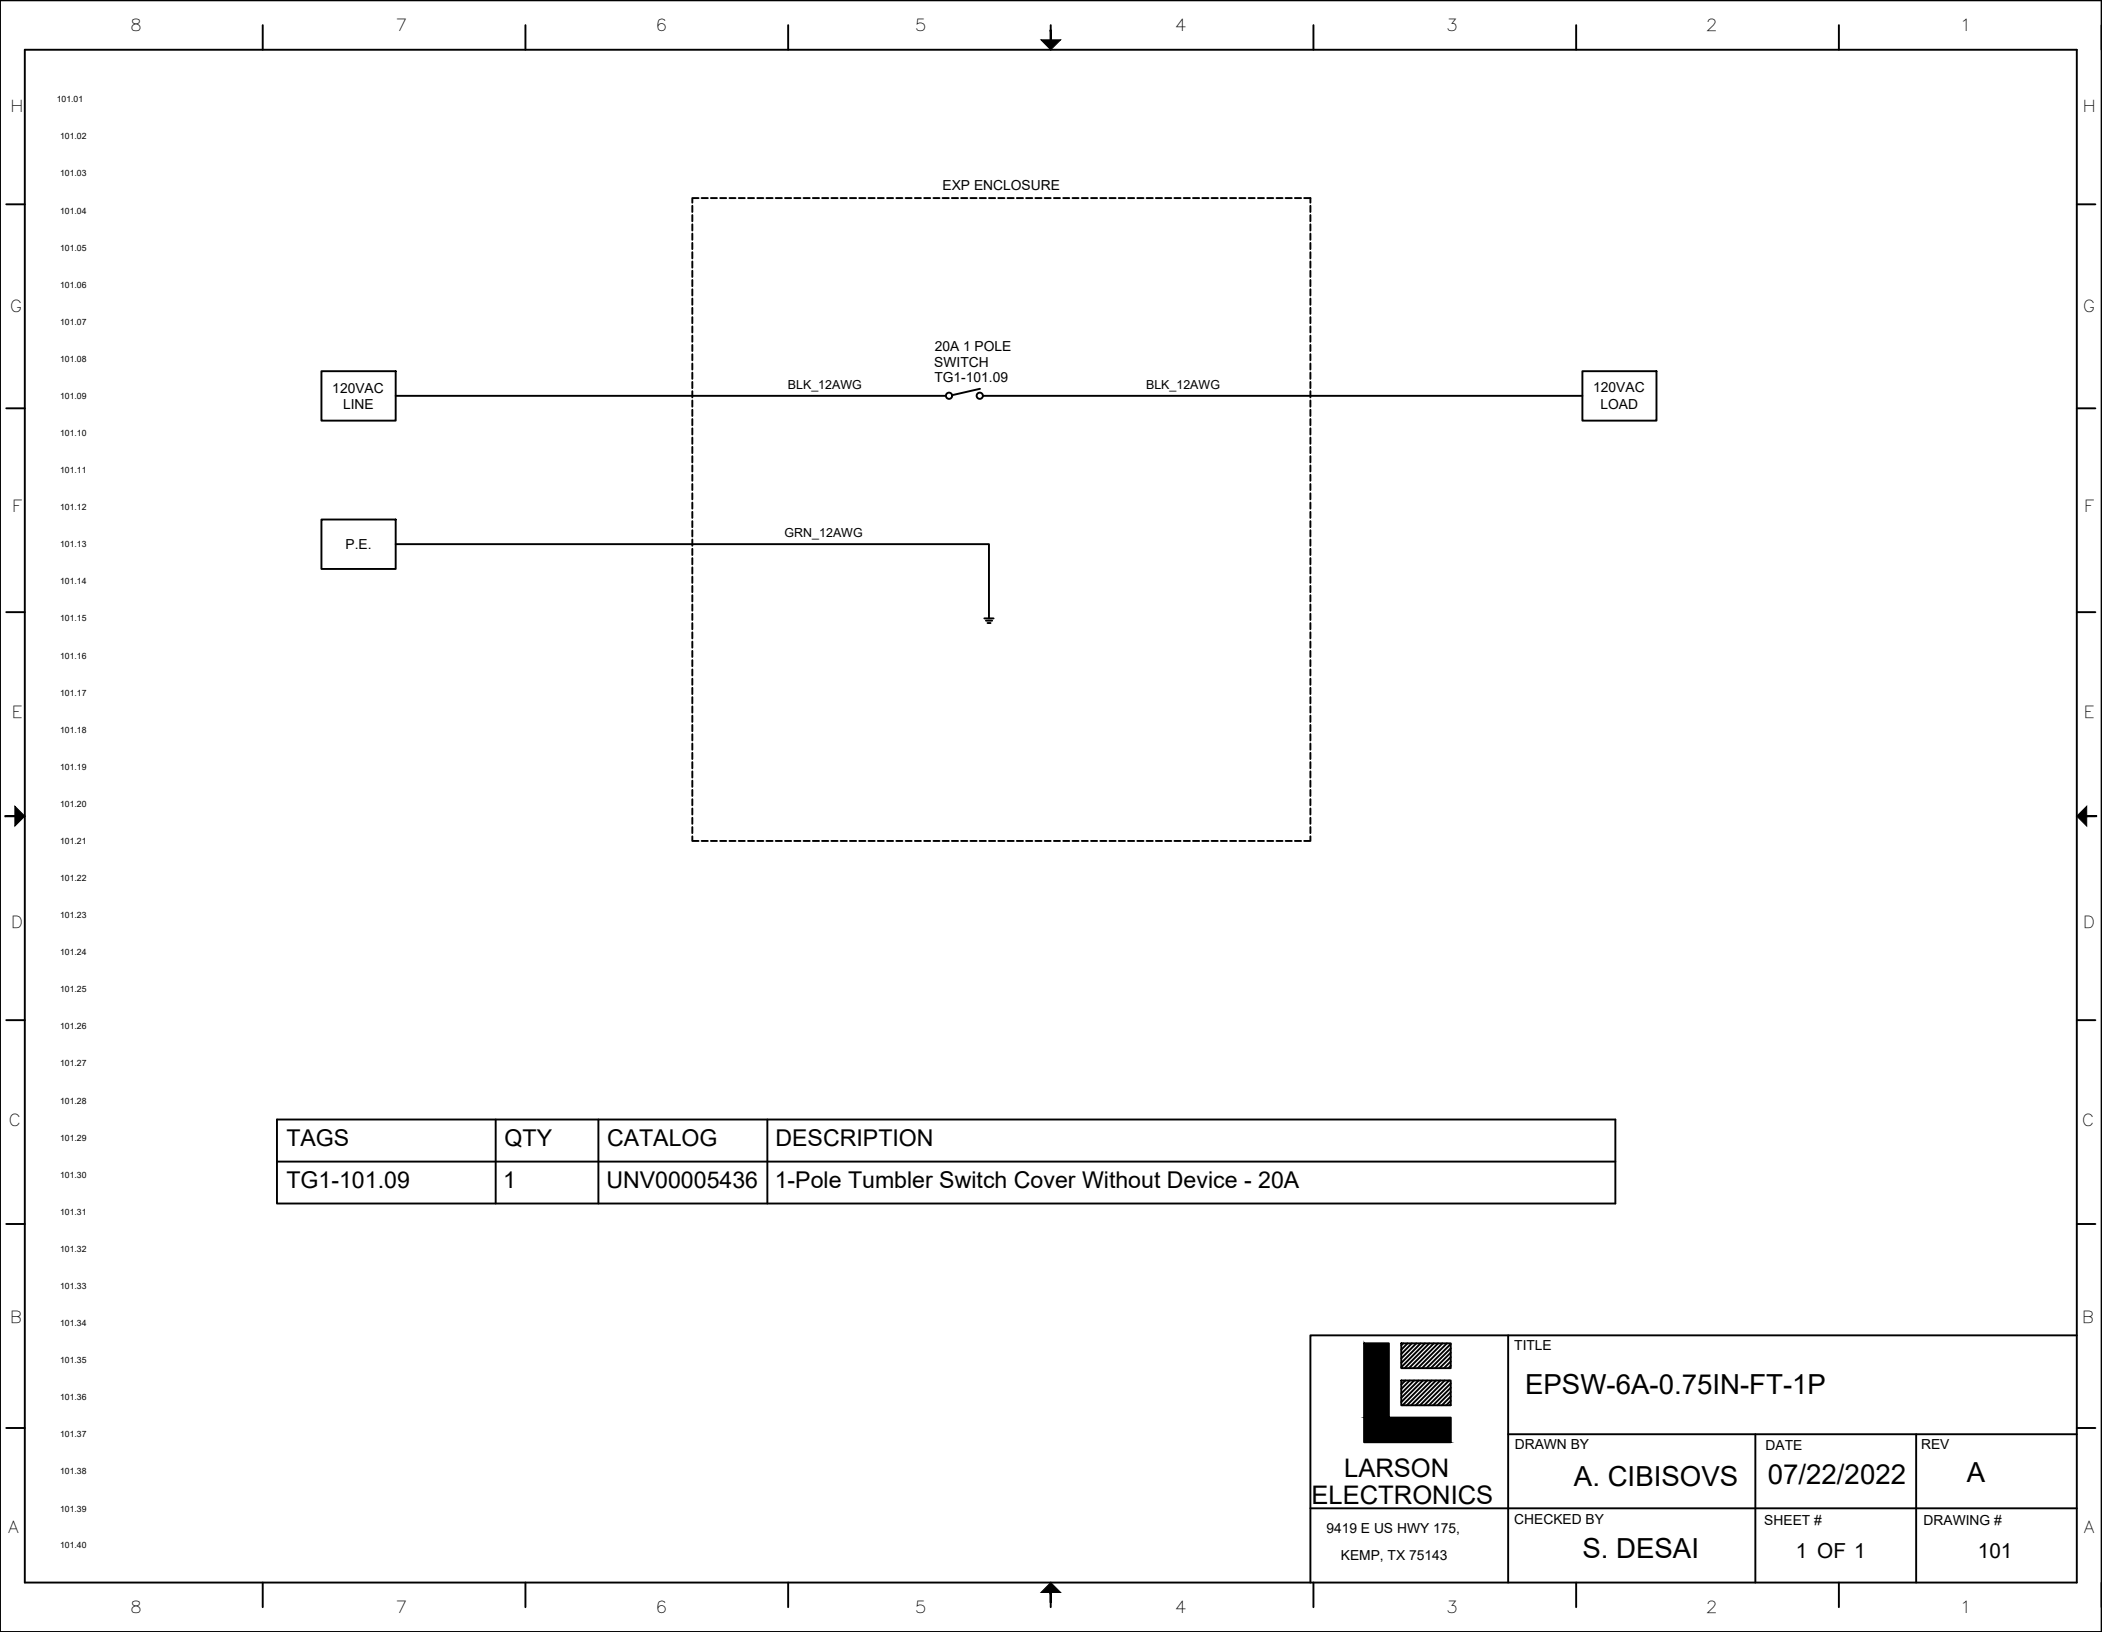

TAGS	QTY	CATALOG	DESCRIPTION
TG1-101.09	1	UNV00005436	1-Pole Tumbler Switch Cover Without Device - 20A


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE EPSW-6A-0.75IN-FT-1P		
	DRAWN BY A. CIBISOVS	DATE 07/22/2022	REV A
	CHECKED BY S. DESAI	SHEET # 1 OF 1	DRAWING # 101




Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

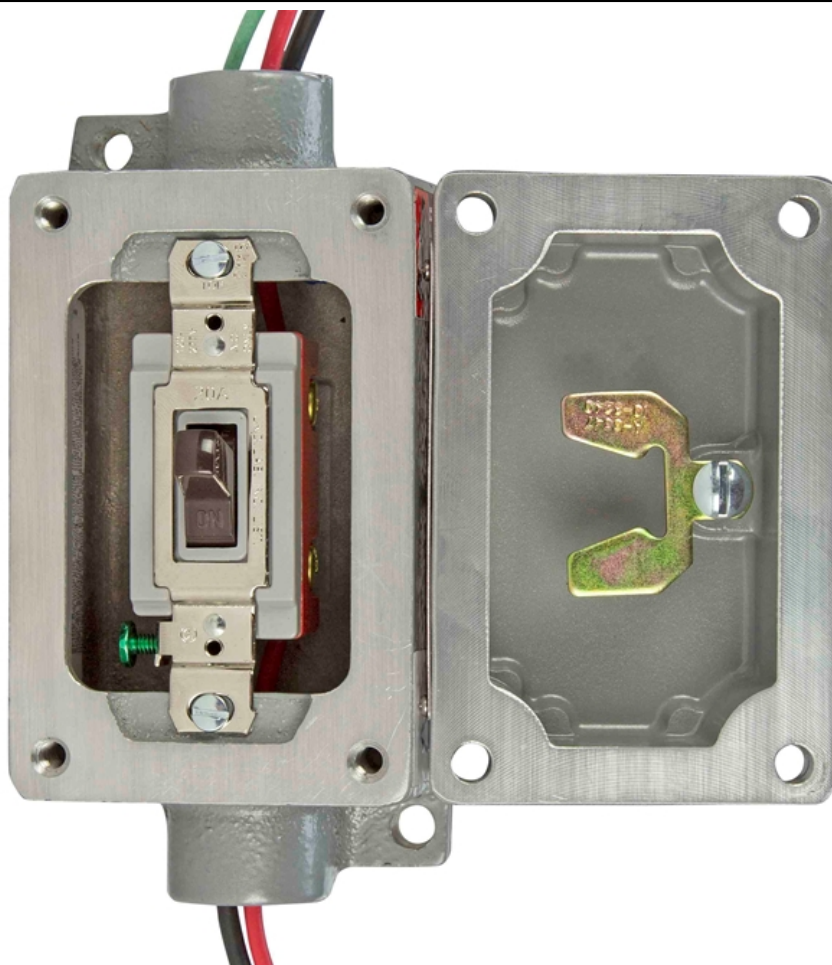



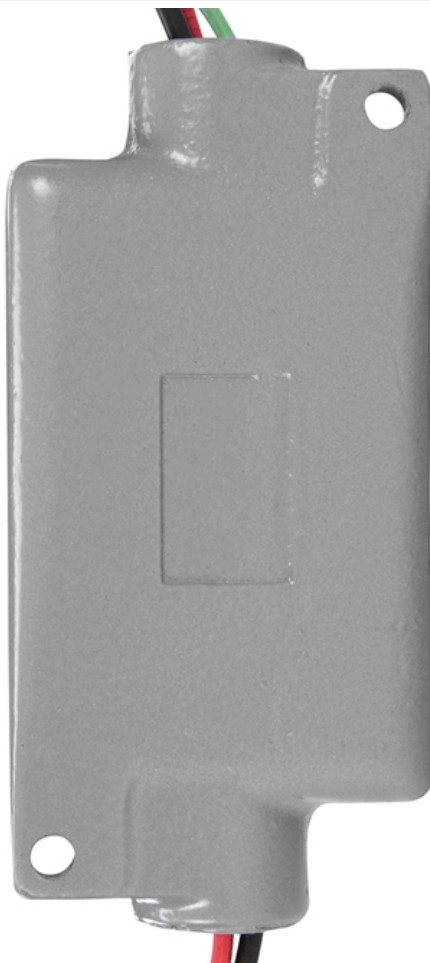



Frequently Asked Questions (FAQ)

There are no Faqs