Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10

0.5 kVA Rack Mounted Isolation Transformer, 220V Primary - 110V Secondary. 50/60Hz, Flange Mounted Plug/Receptacle

Product ID: 286030



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 Rack Mounted Isolation Transformer

Transformer Type: Isolation
Phase: Single Phase
Frequency: 50/60 Hz
Input Voltage: 208 V AC
Primary Configuration: Two Winding
kVA: 4.15
Output Voltage: 240 V AC
Winding Material: Copper
Inlet Plug: Flange Mounted NEMA L6-20 Plug
Outlet Receptacle: Surface Munted NEMA L6-20R Receptacle
Protection: (1) 20-Amp, 2-Pole Breaker
Max Capacity: 500 Watts Max
Cooling: Air / Dry Type
Insulation: 130°C
Temperature Rise: 80°C
Sound Level: 36 dB
Enclosure Rating: NEMA 3R
Encapsulation: Silica Sand & Resin Compounds
Enclosure Material: Steel
Finish: Powder Coated - Black
Mounting: 19" Standard Server Rack (6U Unit)
Dimensions: 19"-W x 14"-D x 10.5"-H (482.6mm-W x 355mm-D 265mm-H)
Weight: 45 lb

Ratings

NRTL Listed for United States
NRTL Certified for Canada
Black Powder Coated Steel Enclosure
Meets or Exceeds NEMA ST-20 Standards
Isolation Transformer
Low Profile Front Mounted Handles

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 from Larson Electronics is a Single Phase Rack Mounted Isolation Transformer

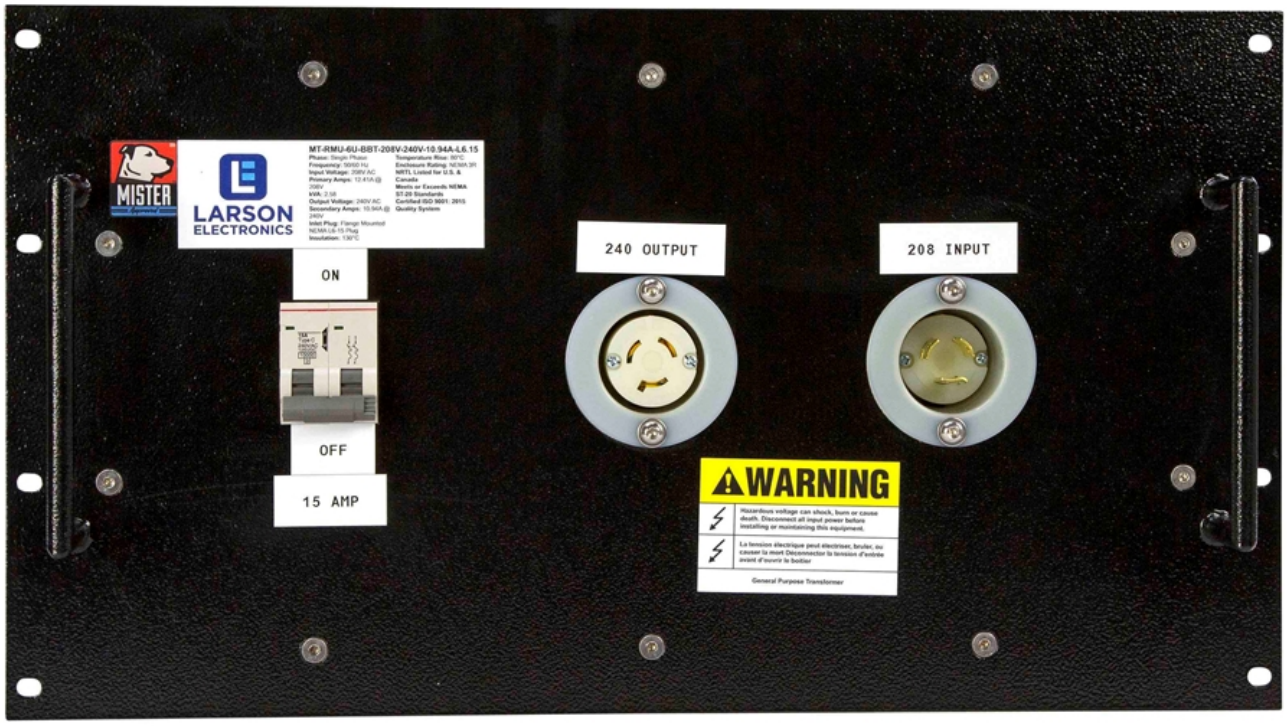
that is powerful, reliable, and designed with the environment in mind. Suitable for server rack applications, the MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 provides increased reliability, higher efficiency, protection against critical equipment failures, and an extra level of protection by isolating the power source from the connected device. The lower operating costs, lower heat emissions, and lower cost of ownership make this transformer ideal for a wide range of applications and businesses. The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 is a 6 rack units (6U) tall and is for a 19-inch standard rack mount.
PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*
Transformer Features: With a transformer rating of 500 VA, the MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 isolation transformer is a single phase unit with a primary voltage of 220 V. This rack mounted transformer has a secondary voltage of 110 V AC. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.
This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The black powder coated steel enclosure makes the unit suitable for mounting in a 19" standard rack mount. A pair of low profile handles on the front of the enclosure make installation and removal a simple task while still allowing server rack doors to close. The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 features a 130°C insulation with a 80°C temperature rise.
Construction: The windings in the MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 are formed from high quaility magnetic copper wire help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations. Buck and boost transformers are designed to maximize the performance and life of electrical equipment. The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 is encapsulated in silica sand and resin, and cased in a black powder coated steel enclosure. NEMA 4, NEMA 4X, and NEMA 12 enclosures are available upon request.



Click Image to Enlarge

Benefits: The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 buck/boost step-up transformer offers many benefits to the consumer. Buck/boost transformers pass the majority of the load voltage directly through the transformer, only transforming a small percentage of the load. Due to this technology, a smaller and quieter step-up transformer is manufactured and uses less materials. This provides owners with significant energy savings as well as offering environmental benefits.
Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Installation and maintenance costs are reduced due to the smaller form factor, and less overall space requirements are decreased. In addition, these step-up transformers operate quieter than a standard autotransformer of the same capacity.
Mounting: This rack mounted transformer is designed to be mounted inside

server racks. The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 is a 6U unit which allows it to fit in a 19" standard rack mount. The front located handles assist in inserting and removing the transformer while having a low enough profile to allow server rack doors to close.
Wiring/Connections: The MPD-MT-RMU-6U-NTL.L09-220V-500VA-110V-L6.30-2.N10 features a flange mounted inlet plug and two surface mount outlet receptacles. The inlet plug is a NEMA L6-30B plug and the outlet receptacles are 5-20R GFCI duplex receptacles. The plug and receptacle are protected by a 20 amp 2 pole breaker.
Applications: Server rack buck/boost applications.
Limitations: While there are many benefits to a buck/boost transformer, there are some limitations to consider. This transformer will only transformer voltage, it will not convert phases, it will not create even legs between line 1 and line 2 (L1 and L2 WILL be UNEVEN), has no circuit isolation, and does not create a neutral for applications where a neutral is not already present. If any of these limitations apply to you, you will need a standard transformer. Please see below link for our standard line of industrial transformers or our line of phase converters.
Note on Phases: This buck/boost transformer is a single phase step-up transformers. For three phase transformers, click on the following links:
Three Phase Delta Buck/Boost Transformers
Three Phase Wye Buck/Boost Transformers
Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


MISTER
LARSON ELECTRONICS
MT-RMU-6U-BBT-208V-240V-10.94A-L6.15
ON
OFF
15 AMP
240 OUTPUT
208 INPUT
WARNING
Hazardous voltage can shock, burn or cause death. Disconnect all input power before installing or maintaining this equipment.
Le tension électrique peut électriser, brûler, ou causer la mort Déconnecter la tension d'entrée avant d'ouvrir le boîtier
General Purpose Transformer


LARSON
ELECTRONICS
ON
OFF
15 AMP
240 OUTPUT
208 INPUT
WARNING




MT-RMU-6U-BBT-208V-240V-10.94A-L6.15
Phase: Single Phase
Frequency: 50/60 Hz
Input Voltage: 208V AC
Primary Amps: 12.41A @ 208V
kVA: 2.58
Output Voltage: 240V AC
Secondary Amps: 10.94A @ 240V
Inlet Plug: Flange Mounted NEMA L6-15 Plug
Insulation: 130°C
Temperature Rise: 80°C
Enclosure Rating: NEMA 3R
NRTL Listed for U.S. & Canada
Meets or Exceeds NEMA ST-20 Standards
Certified ISO 9001 : 2015 Quality System
LARSON ELECTRONICS
A46

Frequently Asked Questions (FAQ)