Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

EXPCMR-NDAA-IP-POE-DPTZ-SFC

6MP Explosion Proof Digital Pan Tilt Zoom Security Camera - 360° - PTZ- C1D1 - Surface Mount Bracket - NDAA Compliant

Product ID: 287237



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EXPCMR-NDAA-IP-POE-DPTZ-SFC Explosion Proof Digital PTZ

Unit Type: Explosion Proof Camera
Dimensions: 9.13"L x 15.63"W x 7.18"H
Total Watts: 12W Max
Voltage: 12V DC
PoE: 802.3af
Image Sensor: Progressive Scan CMOS
Camera Resolution: 3072 x 2048
Megapixel: 6
Compression Type: H.264, MJPEG
Frame Rate: High-frame Mode- 1 Fisheye 25fps @ 2048 x 1536, 30fps @ 2048 x 2048, 4x ePTZ 30fps @ 1024 x 768; Multi-channel Mode- 1 x Fisheye 15fps @ 1280 x 1280, 1x Panoramic 15fps @ 2048 x 1536, 3x ePTZ 15fps @ 1024 x 768
Day/Night Function: True D/N w/Mechanical Cut Filter
IR Wavelength/Range: 850 nm/49 Feet
Relative Aperture (F-stop): 2.8
FOV (Degrees): 360°
Audio Compression: 64Kbps (G.711)/16Kbps (G.726)/MP2L2
Audio Streaming: Two-way Audio Streaming w/ Built-in Mic
Ethernet Interface: RJ-45
Ethernet Ports/Speed: 1, 10/100
Networking Protocols: TCP/IP, HTTP, HTTPS, DHCP, UDP, RTP, RTSP
Recording: Email Notification, Event Log, Event Notification, Event Search, Motion Detection, Pre/Post Alarm Recording, Privacy Video Block, Video Analytics Capable
Storage Capacity: 64 GB max via SD card slot
Connectors: Sensor Inputs (1), Alarm Output (1), Audio In (1), Audio Out (1)

Ambient Temperature Range: -22°F ~ 140°F
Material: Copper-free Aluminum
Finish: Electrostatically Applied Powder Epoxy/Polyester Finish

Quick Summary

National Defense Authorization Act (NDAA) Compliant
Class I, Div. 1 & 2, Groups B, C, D
Class I, Zones 1 & 2, Groups IIB+H2, IIA
Class II, Div. 1 & 2, Groups E, F, G
Class III, Div. 1 & 2
NEMA 3, 4, 4X, 7 (B, C, D), 9 (E, F, G)
ATEX/IEC Ex
Ex d IIC T6 or T5
Motion Detection

Day/Night Operation

Special Orders - Special Requirements

Contact us for special requirements

Lens Cover Material: Tempered Soda Lime Glass

Wiring Hub: (2) 3/4" - 14 NPT Drilled and Tapped Conduit Openings

Mount: Flat Surface/Trunnion Mount

Camera Weight: 13.1 lb

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The EXPCMR-NDAA-IP-POE-DPTZ-SFC from Larson Electronics is an Explosion Proof Digital Pan Tilt Zoom Camera that is designed for security and remote observation in both indoor and outdoor hazardous environments. This high resolution day/night camera features a mechanical infrared cut filter, motion detection and up to 64GB internal storage. The security device comes with the following explosion proof ratings: Class I, Div. 1 & 2, Groups B, C, D; Class I, Zone 1 and Class II, Div. 1 & 2, Groups E, F, G. Constructed of heavy duty aluminum, the NDAA compliant unit supports 360° fisheye panoramic surround views and up to five independent camera views at once on-screen.

Camera Features: The EXPCMR-NDAA-IP-POE-DPTZ-SFC digital PTZ camera provides operators in hazardous areas with crisp high resolution images. Equipped with a 1.27 mm optical lens, this 12W unit produces up to 6.0 megapixel (3072 x 2048) resolution while operating at 12V DC. Operators may choose from the following viewing modes: fisheye, horizontal panoramic and ePTZ quad view. A 360° fisheye panoramic surround view offers wider coverage and eliminates blind spots, while a 180° panoramic view provides end-to-end horizontal coverage. For operation in dark hazardous locations, Infrared (IR) LEDs may be enabled for coverage up to 49 feet. Smart IR technology reduces over-exposure of the IR LEDs at the center of the image.

This device features two-way audio using a built-in speaker and microphone. The EXPCMR-NDAA-IP-POE-DPTZ-SFC security camera is designed to perform under harsh and rugged conditions. For use in extreme environments, the IP66 rated waterproof unit resists the corrosive effects of weather, dust, dirt, and humidity. With a copper-free aluminum housing, the camera is capable of operating in hazardous locations with temperatures ranging between -22°F and 140°F, as well as 0% to 95% non-condensing, humid environments.

This outdoor security camera complies with the 2019 National Defense Authorization Act (NDAA). The regulation bans federal governments, their contractors and businesses with national security interests from buying and using surveillance equipment made by specific major China-based manufacturers, including Hikvision, Dahua and their OEMs. Security products sold by Honeywell, Bosch, Panasonic, ADT, Flir and many more are affected by the ban. NDAA compliance also includes a ban on ZTE, Huawei and Hytera telecommunication equipment.

Wiring: This unit is designed to operate on 12V DC, consuming a maximum of 12W per system. Two 3/4" - 14 NPT drilled and tapped conduit openings (one top and one bottom) are available for wiring.

Our explosion proof cameras with Power over Ethernet (PoE) features enable data transfers and power to be passed through a single Ethernet cable that is usually a Cat 3/Cat 5 cable or better. There are several types of PoE, which come with their own respective standard and maximum power to port capabilities. The IEEE 802.3af PoE standard, with a voltage range of 44.0 - 57.0V, offers 15.4W of DC power for each port. The IEEE 802.3at PoE standard, with a voltage range of 50.0 – 57.0V, provides up to 30W of DC power per port, which is ideal for surveillance cameras, antennas and network access points. The IEEE 802.3bt PoE standard, with a voltage range of 50.0 – 57.0V, provides 60W of DC power for each port. In order to utilize PoE properly, the components, such as the receiving unit and sending device, must be PoE compliant.

Mounting: The EXPCMR-NDAA-IP-POE-DPTZ-SFC explosion proof security camera can be mounted on flat surfaces via an adjustable trunnion mount.


Applications: Vessel, tank and reactor monitoring, remote observation of external facilities, offshore and land based rigs, indoor and outdoor security, commercial buildings, service garages, oil refineries and other applicable

hazardous locations.
At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

REV	DESCRIPTION	DATE
A	PRODUCTION RELEASE	11-25-2024

EXPCMR-NDAA-IP-POE-DPTZ-SFC

LARSON ELECTRONICS®

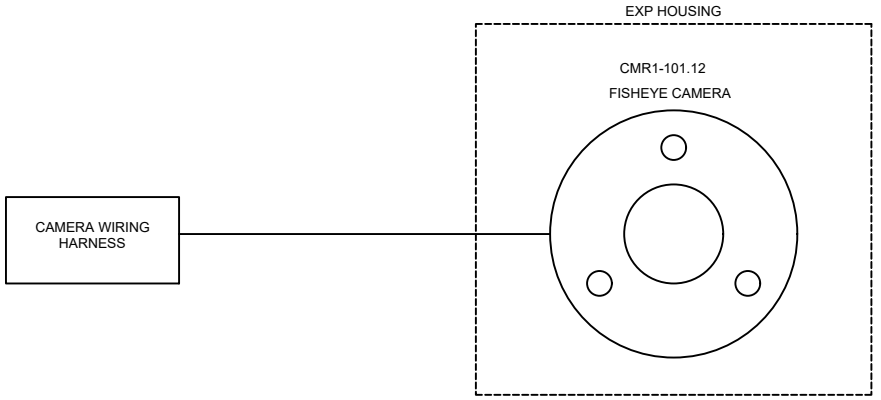



TAGS	QTY	CATALOG	DESCRIPTION
CMR1-101.12	1		5MP IP NDAA Fisheye Camera with Built-in Alarm/Audio


LARSON ELECTRONICS


9419 E US HWY 175,
KEMP, TX 75143

TITLE			
EXPCMR-NDAA-IP-POE-DPTZ-SFC			
DRAWN BY	DATE	REV	
J.Maldonado	11-25-2024	A	
CHECKED BY	SHEET #	DRAWING #	
	1 OF 1	101	

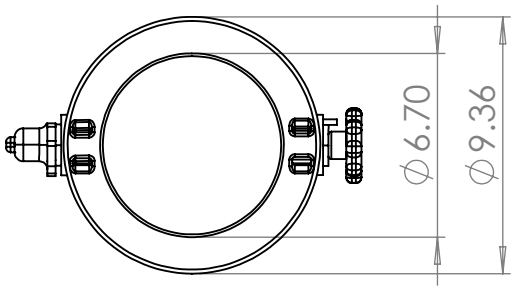

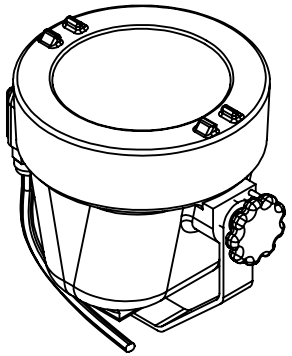

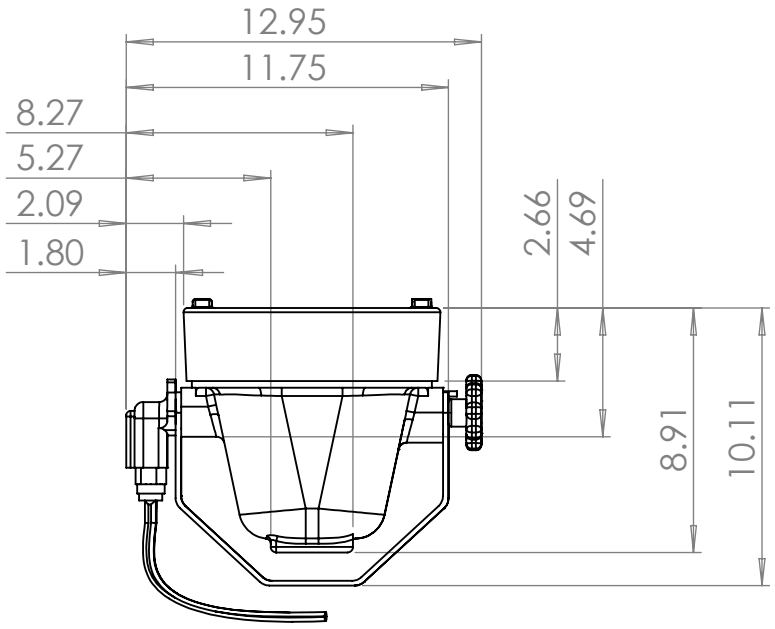

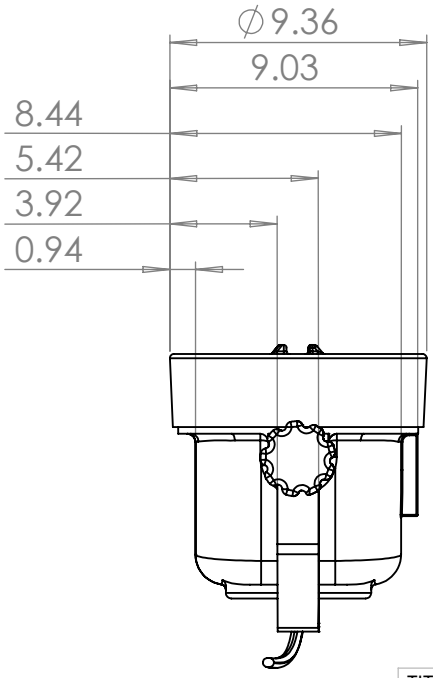

LARSON ELECTRONICS

TITLE:

EXPCMR-IP-POE-DPTZ

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

UNLESS OTHERWISE NOTED:
ANGLE: +/- .5
.X +/- .02
.XX +/- .01
.XXX +/- .005

DIMENSIONS ARE IN INCHES			NAME
Quantity	1	DRAWN	Luis Martinez
MATERIAL		CHECKED	N/A
DO NOT SCALE DRAWING		DATE	1

SIZE	DWG. NO.	REV
A		00

SCALE: NTS SHEET 1 OF 1

5 4 3 2 1




CAUTION
LARSON
ELECTRONICS


LARSON
ELECTRONICS



Frequently Asked Questions (FAQ)