

MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1

5 MVA Conservator Substation - 34500V Delta Primary, 600Y/347 Wye Secondary - KNAN, Grey
Product ID: 296452



Image: MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 Conservator Transformer

Transformer Type: Distribution Transformer, Conservator-Type

Transformer Configuration: Liquid Filled Substation

Transformer Feed Type: Radial Feed

Operation: N/A

Phase: Three Phase

Capacity: 5 MVA (5,000 KVA)

Vector Group: DYN11

Primary Voltage: 34500V Delta

Primary Voltage Switch: N/A

Primary Voltage Class: 35 kV Class

Primary Phasor: Delta

Primary BIL: 150 kV

Secondary Voltage: 600Y/347

Secondary Voltage Class: 1.2 kV Class

Secondary Phasor: Wye

Secondary BIL: 30 kV

Frequency: 50 Hz

Temperature Rise: 50°C

Insulation Rating: N/A

Cooling Class: ONAN; Self-Cooled

Forced Air (Fans): None

Tap Changer: 5-position Tap Changer, Manual Off

Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps

Ratings

Meets/Exceeds IEC 60076 Ratings

Non-PCB Insulating Fluid

Tamper Proof Housing

Class A Insulation

No Power Factor Efficiency @ 100% Load: 99.04%

No Power Factor Efficiency @ 75% Load: 99.23%

No Power Factor Efficiency @ 50% Load: 99.41%

No Power Factor Efficiency @ 25% Load: 99.49%

0.8 Power Factor Efficiency @ 100% Load: 98.80%

0.8 Power Factor Efficiency @ 75% Load: 99.04%

0.8 Power Factor Efficiency @ 50% Load: 99.26%

0.8 Power Factor Efficiency @ 25% Load: 99.36%

No Load Loss: 4320W, 10% Tolerance

Full Load Loss: 31300W, 10% Tolerance

Note: Losses offered are typical only, not guaranteed

Tap %: 2.5%

Tap Changer Switch Rating: N/A

Tap Changer Switch Location: High Voltage (HV) Front Compartment

Impedance (Typical): 6%

Primary Connection Type: Dead Front

Primary Termination Arrangement: N/A

Primary Termination: Cable Boxes in Highly Contaminated Area

Primary Connection Qty: (3)

Primary Bushing Rating: N/A

Primary Neutral Connection: N/A

Primary Surge Arrestors: Included on Primary Side

Primary Surge Arrestor Voltage Rating: N/A

Primary Surge Arrestor MCOV Rating: N/A

Primary Over Current Protection (OCP): N/A

Primary Over Current Protection Method: N/A

Primary Over Current Protection Holder: N/A

Primary Grounding Provisions: N/A

Secondary Connection Type: Live Front

Secondary Termination Arrangement: N/A

Secondary Connections: Cable Boxes

Secondary Connection Qty: (4)

Secondary Connection Supports: N/A

Secondary Over Current Protection (OCP): N/A

Secondary Neutral Connection: N/A

Grounding Provisions: (1) Grounding lug, accepts #2 copper

Metering Current Transformer (CT): N/A

Metering Panel: Provision for DGA Analyzer and Doble Test terminals

Control Panel: Buchholz Relay (alarm and trip), Pressure Relief Device (alarm and trip), Oil Level Indicator (alarm and trip), Dehydrating Breather, Oil Temp (alarm and trip), Coil Winding Control Panel Temp (alarm and trip)

Load Break Switch: N/A

Load Break Switch Qty: N/A

Load Break Switch Rating: N/A

Load Break Switch Location: N/A

Efficiency Standard(s): Meets ANSI/IEEE Standards

K-Factor Rating (Harmonic Mitigation): K-1 (Standard)

Pulse Drive Rating: N/A

Insulation Fluid: Biodegradable Natural Vegetable Oil Ester Insulating Fluid - Insulation Fluid Non-PCB Fluid

Fluid (Oil) Capacity*: N/A

Fluid (Oil) Weight*: N/A

Liquid Level Indicator: Analog Dial Gauge

Temperature Indicator: Analog Dial Gauge - Measuring Oil and Coil Temperature

Pressure/Vacuum Indicator: Analog Dial Gauge

Pressure Relief Device: Included, Automatic Action

Fault Indicator: N/A

Gas Sampler Valve: N/A

Fill Valve: Removable Bolt

Fill Valve Location: Front Compartment
Drain Valve: Included w/ Sampler
Drain Valve Location: Front Compartment
Winding Material: Copper
Ambient Temperature Rating: 55°C
Ambient Operating Temperature Range: N/A
Sound Level: N/A
Elevation (Altitude): 3300ft (1000 meters) Above Sea Level
Core Material: Iron
Tank Material: Coated Steel
Cabinet Material: Coated Steel
Base Platform Material: Coated Steel
Portability: N/A
Housing Type: Cable Box w/ Doors, HV Compartment Right, LV Compartment Housing Type Left
Enclosure Rating: N/A
Seismic Rating: N/A
Paint Type: Weatherproof and UV Resistant Epoxy Coating and Paint Type Undercoating
Finish Color: Grey
Mounting: Supporting Structures
Conduit Opening: Bottom Feed Underground Entry/Exit
Tank Cover Access Handhole: N/A
Dimensions*: N/A
Dry Weight (w/o Oil)*: N/A
Total Weight (Liquid Filled)*: N/A

*Please note that numbers are approximate and subject to change

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 Conservator Substation from Larson Electronics offers powerful, reliable and efficient power distribution in outdoor locations. The low operating costs, low heat emissions, and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. This transformer ensures extra space for storing oil and is equipped with breathers to facilitate air flow. The conservator transformer should be installed on supporting structures.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

Transformer Features: The industrial transformer features a primary voltage of three-phase 34500V Delta and a secondary voltage of three-phase 600Y/347 Wye. This system is rated for 5 MVA (5,000 KVA). We offer systems with loop or radial feed, as well as dead front or live front primary connections. This transformer features a 5-position tap changer with two, +/- 2.5% taps above and two, +/- 2.5% taps below to allow small changes for voltage. There are no rapid rise relays or protection fuses present on the system.

The system features copper windings for high strength and thermal/electrical conductivity. This transformer consists of rectangular coil and five-legged wound core design with three coils and four core loops (this is for three-phase transformers only; single-phase units have one coil and two core loops).

The MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 does not have fans for forced air cooling.

Temperature Rise: This unit features 50°C temperature rise for reduced heat waste, increased reliability and longer life. At 50°C temperature rise, the transformer offers 5 MVA (5,000 KVA). The transformer meets standard efficiency requirements. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults, and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 features biodegradable fluid (ONAN). We offer transformers with mineral oil or FR-3 fluid, if needed.

Biodegradable Fluid: Biodegradable cooling fluid (vegetable oil) has a higher heat capacity compared to mineral oil, making the liquid safer to use and more reliable during operations. Vegetable oil has a higher flash point and fire point than mineral oil, hydrocarbon oil, silicone oil and synthetic ester. This cooling fluid is also non-toxic and can tolerate higher breakdown voltages than mineral oil. When operating at high temperatures, biodegradable cooling liquid sustains up to 120% load conditions, which helps preserve the transformer's lifespan and performance.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature, and pressure/vacuum gauges are analog, manual reading types. These gauges do not have alarm contacts.

Pressure Relief Devices: The pressure relief device on the system features automatic action.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system come with surge arresters on the primary side.

Load Break Switch: The transformer is not equipped with a load break switch.

Valves: The MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 is equipped with a pressure relief valve, fill valve, and drain valve with sampler port.

Protection Fuses: This transformer does not have bayonet protection fuses on the primary side. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.

Mount: This conservator substation should be installed on supporting structures, such as the roof of the transformer main tank.

Benefits: The MT-PSTC-R6-3P-DMA-5MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1 transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.



Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, and more.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

210



THREE PHASE PAD MOUNTED TRANSFORMER

MT-PSTC-R6-3P-DMA-2MVA-YC-HT-LS-A5-AM-CZ-2ZZ-M1

HIGH VOLTAGE		
TAP POSITION	VOLTAGE (V)	CURRENT (A)
1	36225	
2	35363	
3	34500	83.7
4	33638	
5	32775	
LOW VOLTAGE		
VOLTAGE (V)		CURRENT (A)
600		4811.4

RATED CAPACITY

5000 kVA

H.V

34500 V

L.V

600Y/347 V

IMPEDANCE

6 %

USE CONDITION

OUTDOOR

PHASE

3 PHASE

VECTOR GROUP

Dyn11

RATED FREQUENCY

50 Hz

COOLING TYPE

ONAN

STANDARD

IEC60076

PRODUCT CODE

081921

SERIAL NO.

902ZS5000-C1

HV BIL

150

LV BIL

30

TEMPERATURE RISE

65°C

OIL WEIGHT

970 gal

UNTANKED

11460 lbs


TOTAL WEIGHT

22710 lbs

MANUFACTURE DATE


2023

WIRE CONNECTION



Biodegradable Natural Vegetable Oil--Non PCB

PHASOR DIAGRAM




LARSON MAGNETICS


230

170


150

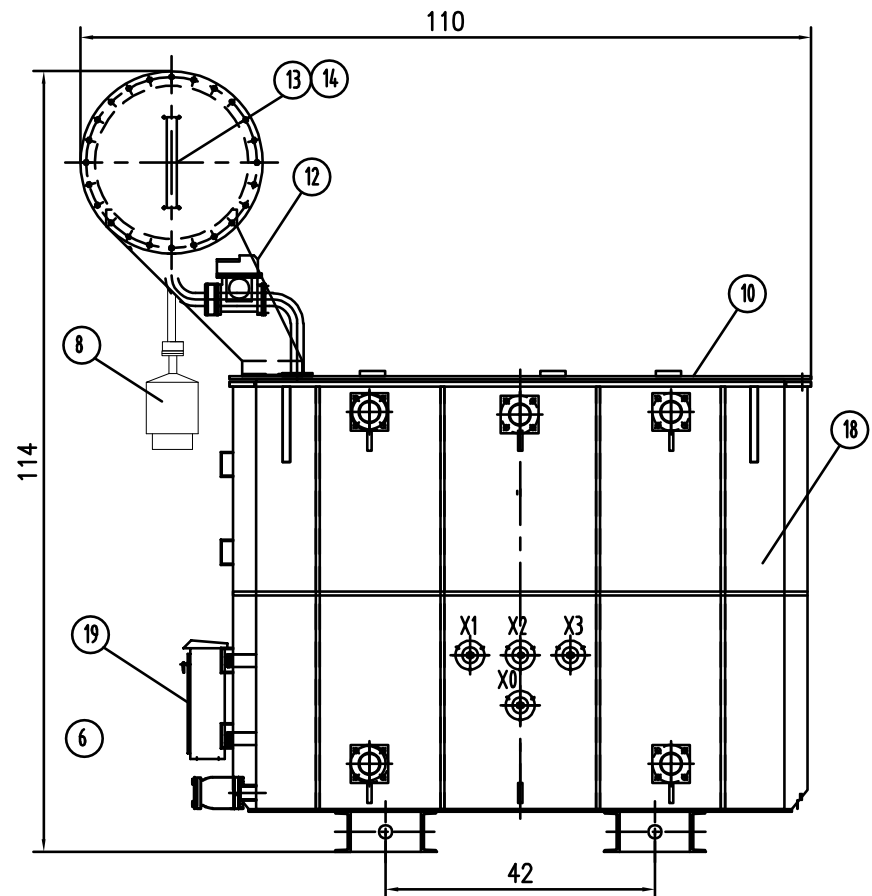


LV SIDE VIEW

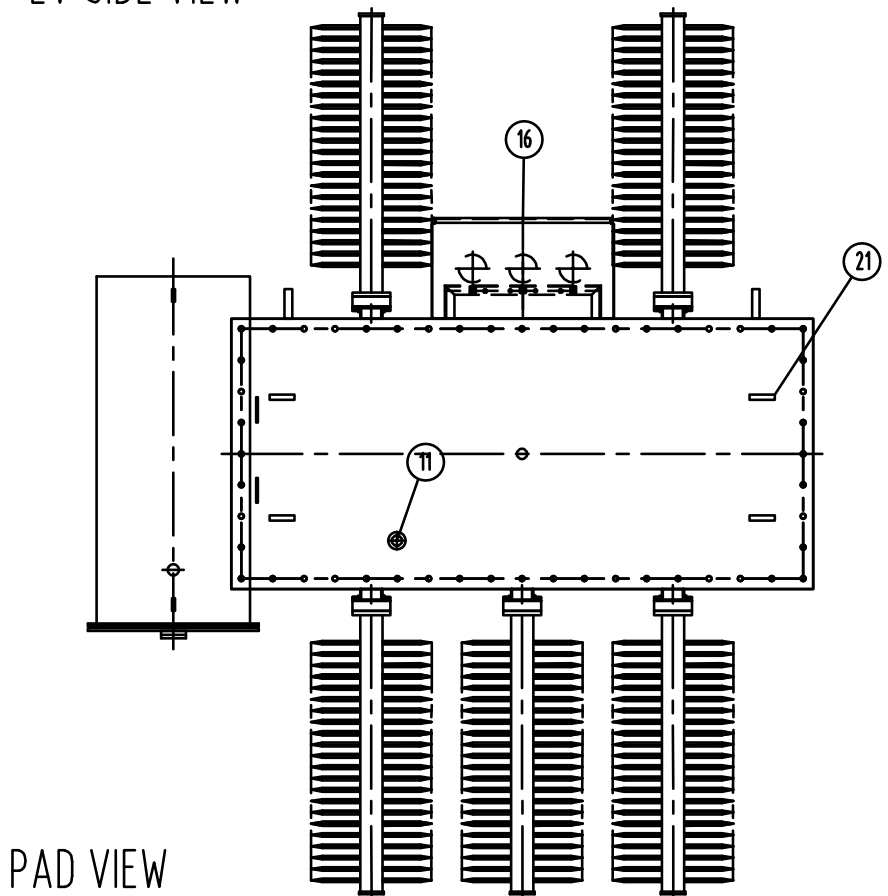


PAD VIEW

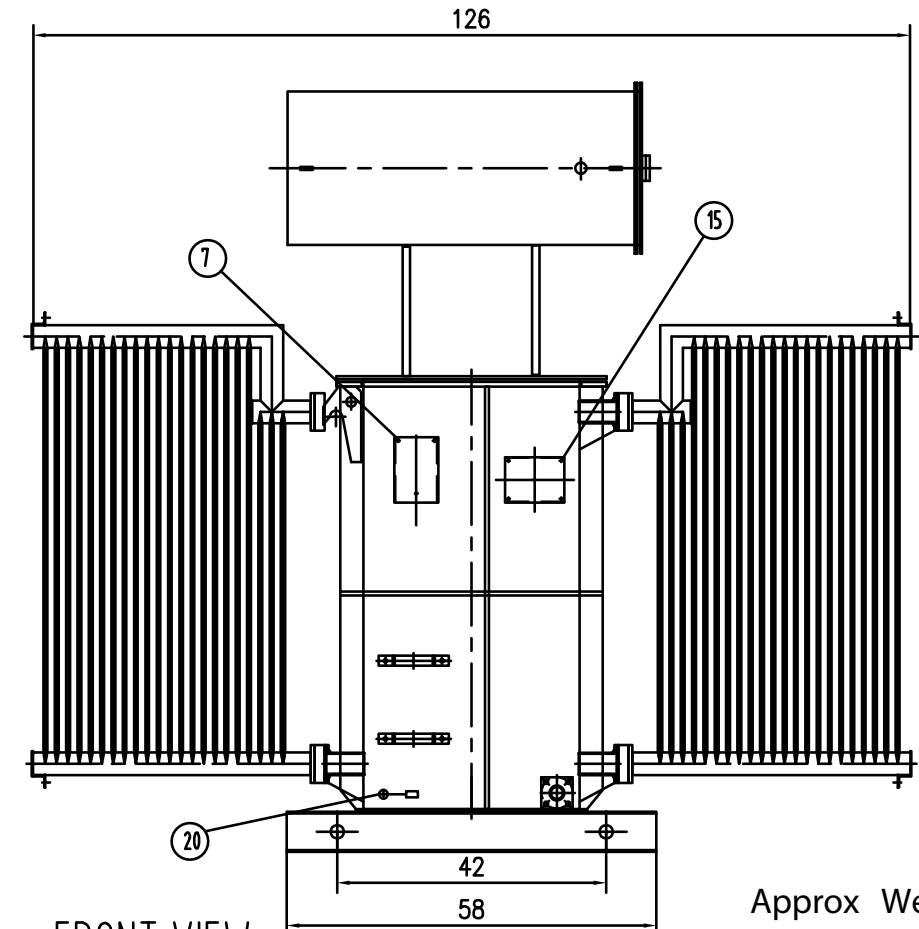


FRONT VIEW

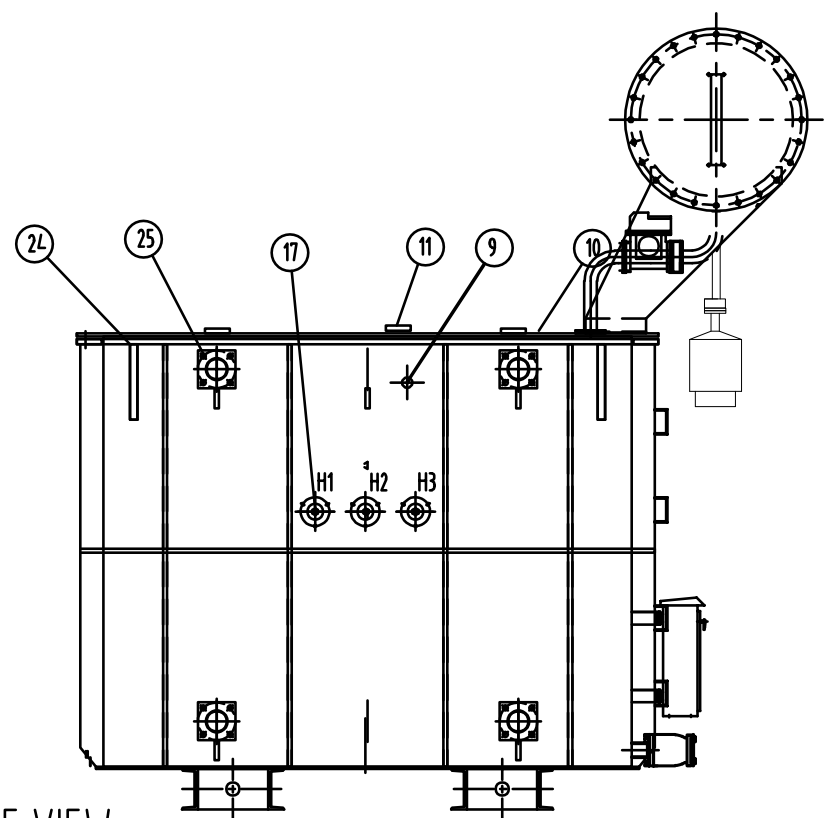

HV SIDE VIEW

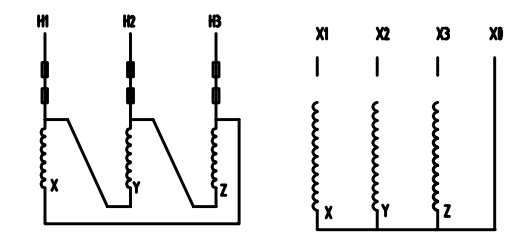

WIRING CONNECTION

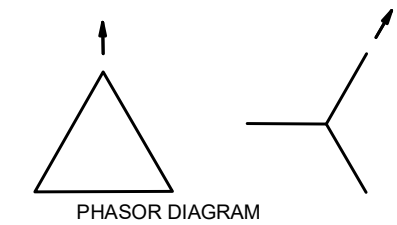

PHASOR DIAGRAM

Approx Weight: 22710 Lbs
Non-PCB Containing Oil

No.	Name	Remarks
25	Butterfly valve	
24	Lifting lug	
23	LV bushing	
22	Radiator	
21	Lifting lug	
20	Grounding bolt	
19	Terminal box	
18	Tank	
17	HV bushing	
16	Cable box	
15	Nameplate	
14	Conservator	
13	Oil level gauge	
12	Buchholz relay	
11	Pressure relief valve	
10	Tank cover	
9	Tap changer	
8	Dehydrating breather	
7	Temperature gauge	
6	Drain valve	
5	LV coil	
4	Active part insulation	
3	HV lead wire	
2	Core assembly	
1	HV coil	

All dimensions are in inches **For approval / preliminary design only. Not for order build specific**

Designed by:	Checked by:	Approved by:	k.V.A:	Votage:	Date:	Scale:	Note! Do not scale copies
			34500V Delta Pri - 600Y/347V Sec, 5000kVA				
			Pad Mounted Transformer				
Drg. No. :			Code:	Paper:	Rev.	Sheet:	



Frequently Asked Questions (FAQ)

There are no Faqs