

MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2

2 MVA Distribution Transformer - 690V Delta Primary - 690D Delta Secondary - NEMA 3R - 60Hz - K-13 - RTD - Taps

Product ID: 306524



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 Distribution Transformer

Transformer Type: Distribution

Phase: Three Phase

Frequency: 60 Hz

Vector Group: DY11

kVA: 2000

Primary Voltage: 690 V Delta

Secondary Voltage: 690 V Delta

Output Taps: 400V Delta [1667A per phase], 480V Delta [1389A per phase], 690V [966A per phase]

Winding Material: Aluminum

Efficiency: DOE 2016 / NRCAN 2019 (Also Meets ON Reg. 404/12)

K-factor: K13

Insulation: 220°C

Temperature Rise: 150°C

Temperature Sensor: RTD Thermostat Sensor

Impedance (Std): 2.5 - 6.5%

Seismic: Yes

Sound Level: Meets NEMA ST-20 Standards

Primary Termination: Front Accessible Terminals

Secondary Termination: Front Accessible Terminals

Enclosure Material: NEMA Type 3R Heavy Duty Ventilated

Finish: ANSI 61 Grey Finish

Dimensions: 94.5"-L x 59.1"-D x 94.5"-H

Weight: 12,566.14 Lbs

Mounting: Floor Mount

Ratings

NRTL Listed for United States and Canada

ANN Cooling

IP14 Rated

Distribution Transformer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 690 V Delta DY11 3 Phase Energy Efficient Distribution Transformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 provides increased reliability and protection against critical equipment failures. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 2000 kVA, the MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 distribution transformer is a three phase unit with a primary voltage of 690 V Delta. It also provides a secondary voltage of 690 V Delta. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard NEMA Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be floor mounted. The unit also features 220°C insulation with a 150°C temperature rise and is rated IP14.






Benefits: The MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 distribution transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.

This distribution transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated mounting brackets make installation fast and easy and the offset outward facing installation holes allow for easy power tool access.

Safety: The MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 is a distribution transformer which means that it provides operators with an increased level of protection against electric shock. A distribution transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-DOE16-3P-690D-2MVA-690D-N3R-K13-RTD-M2 achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: General purposes.



Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

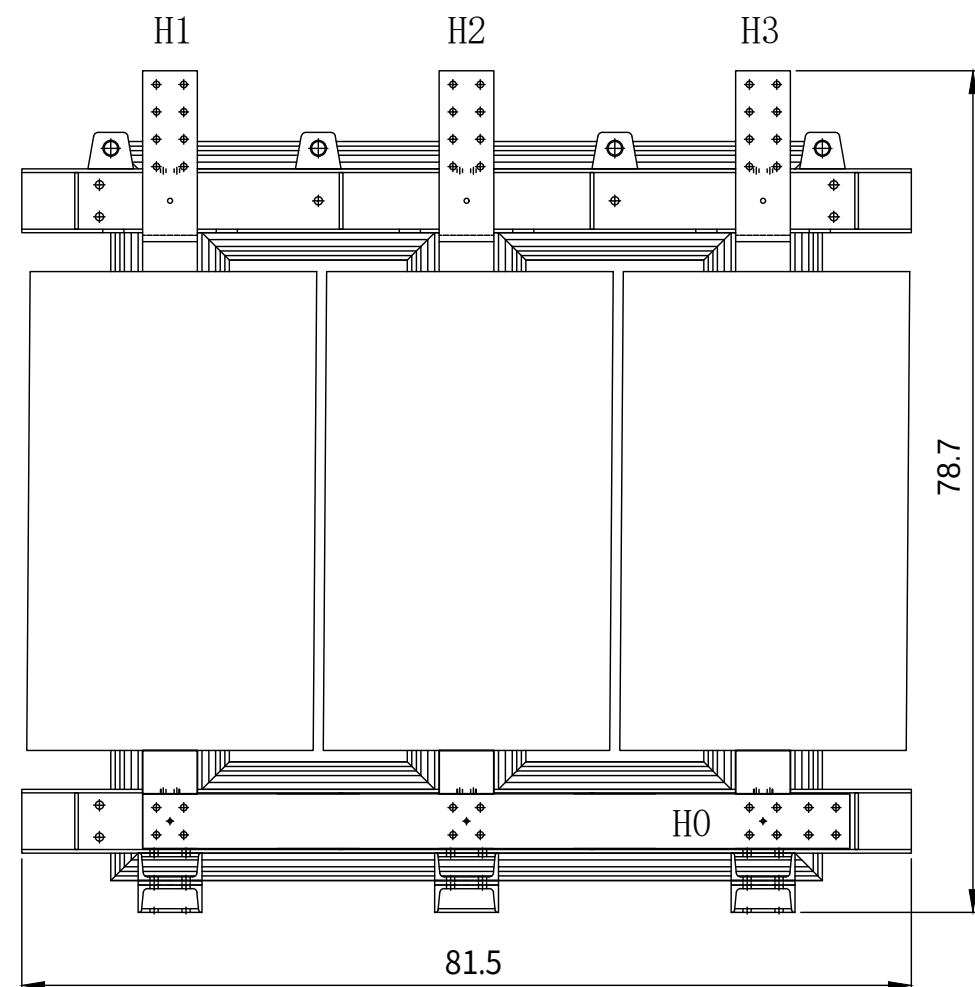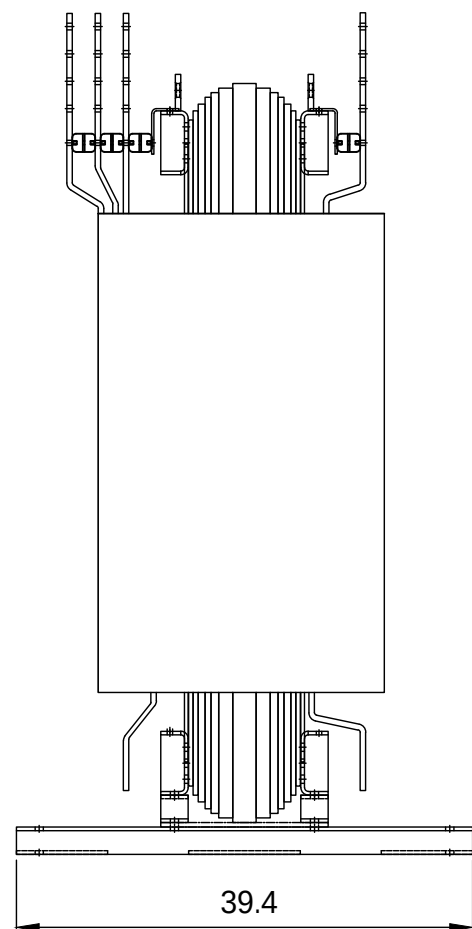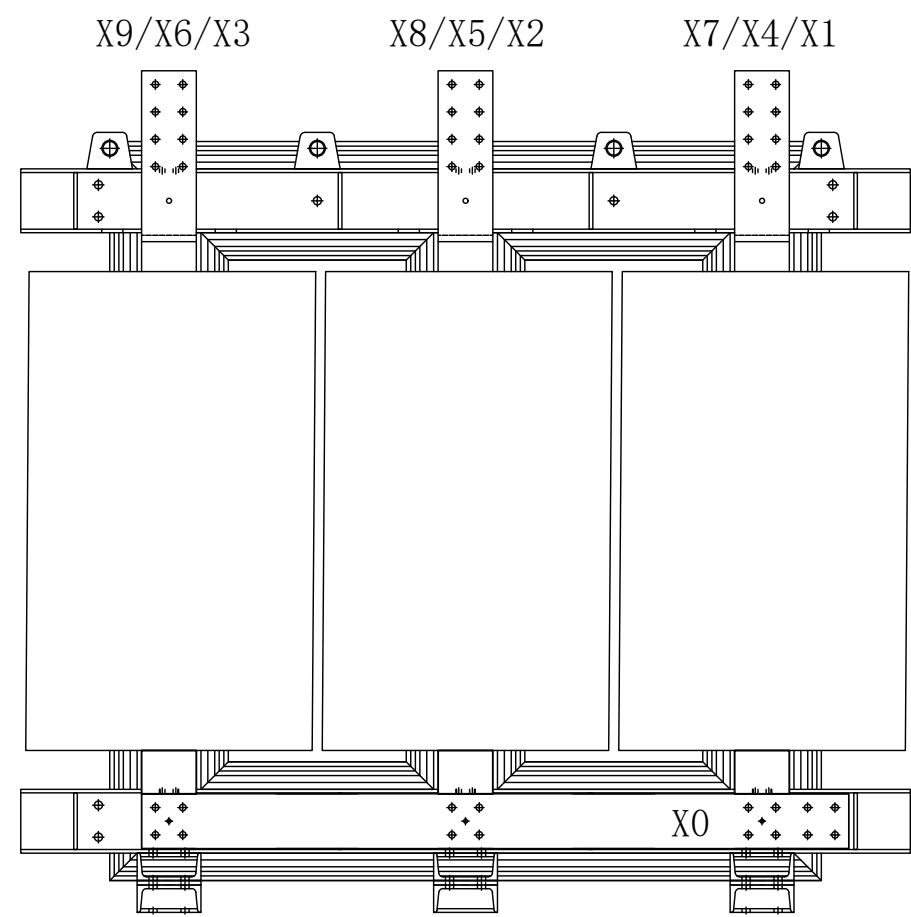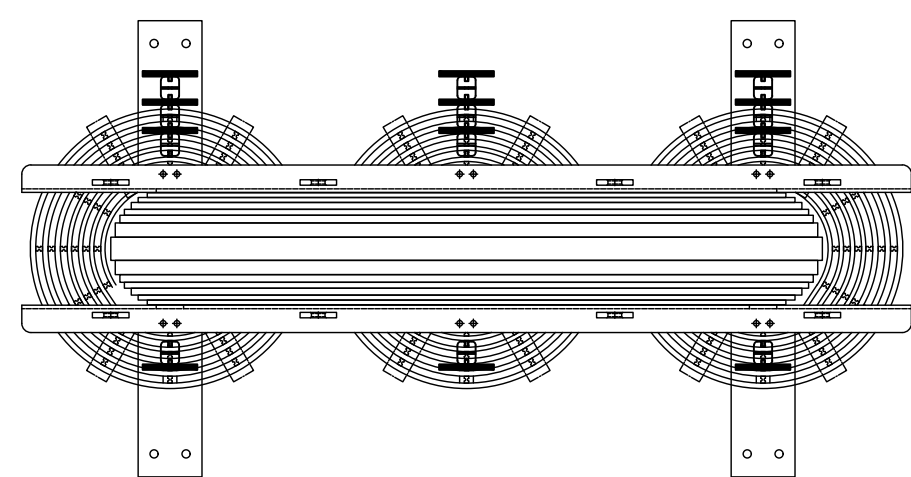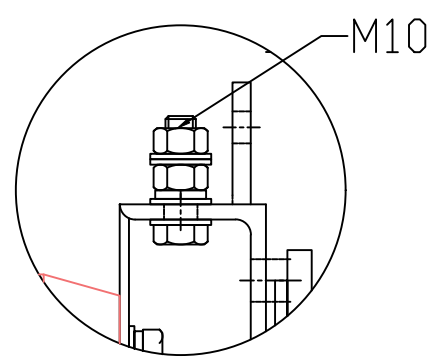


Grounding bolt






Phase	3	Frequency	60Hz
Capacity	2000KVA		
Input	690VAC		
Output	400V 480V 690V		
Vector	Y/y		
Weight	12566.14Lbs		

X1-X2-X3:400V
X1-X2-X3:480V
X1-X2-X3:690V

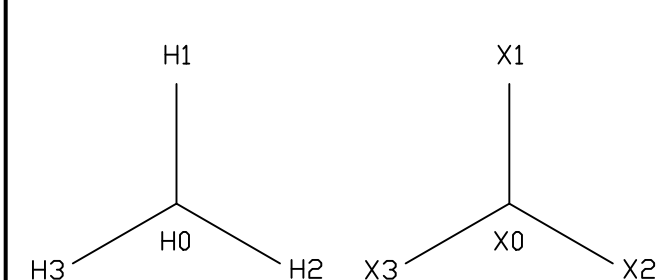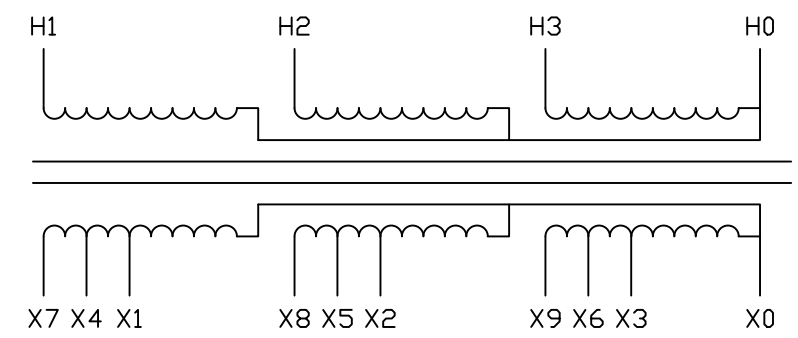

2000KVA 690V-400V 480V 690V DOE	Dry type transformer
K-13 Insulation: 220°C, Temperature Rise: 150°C	


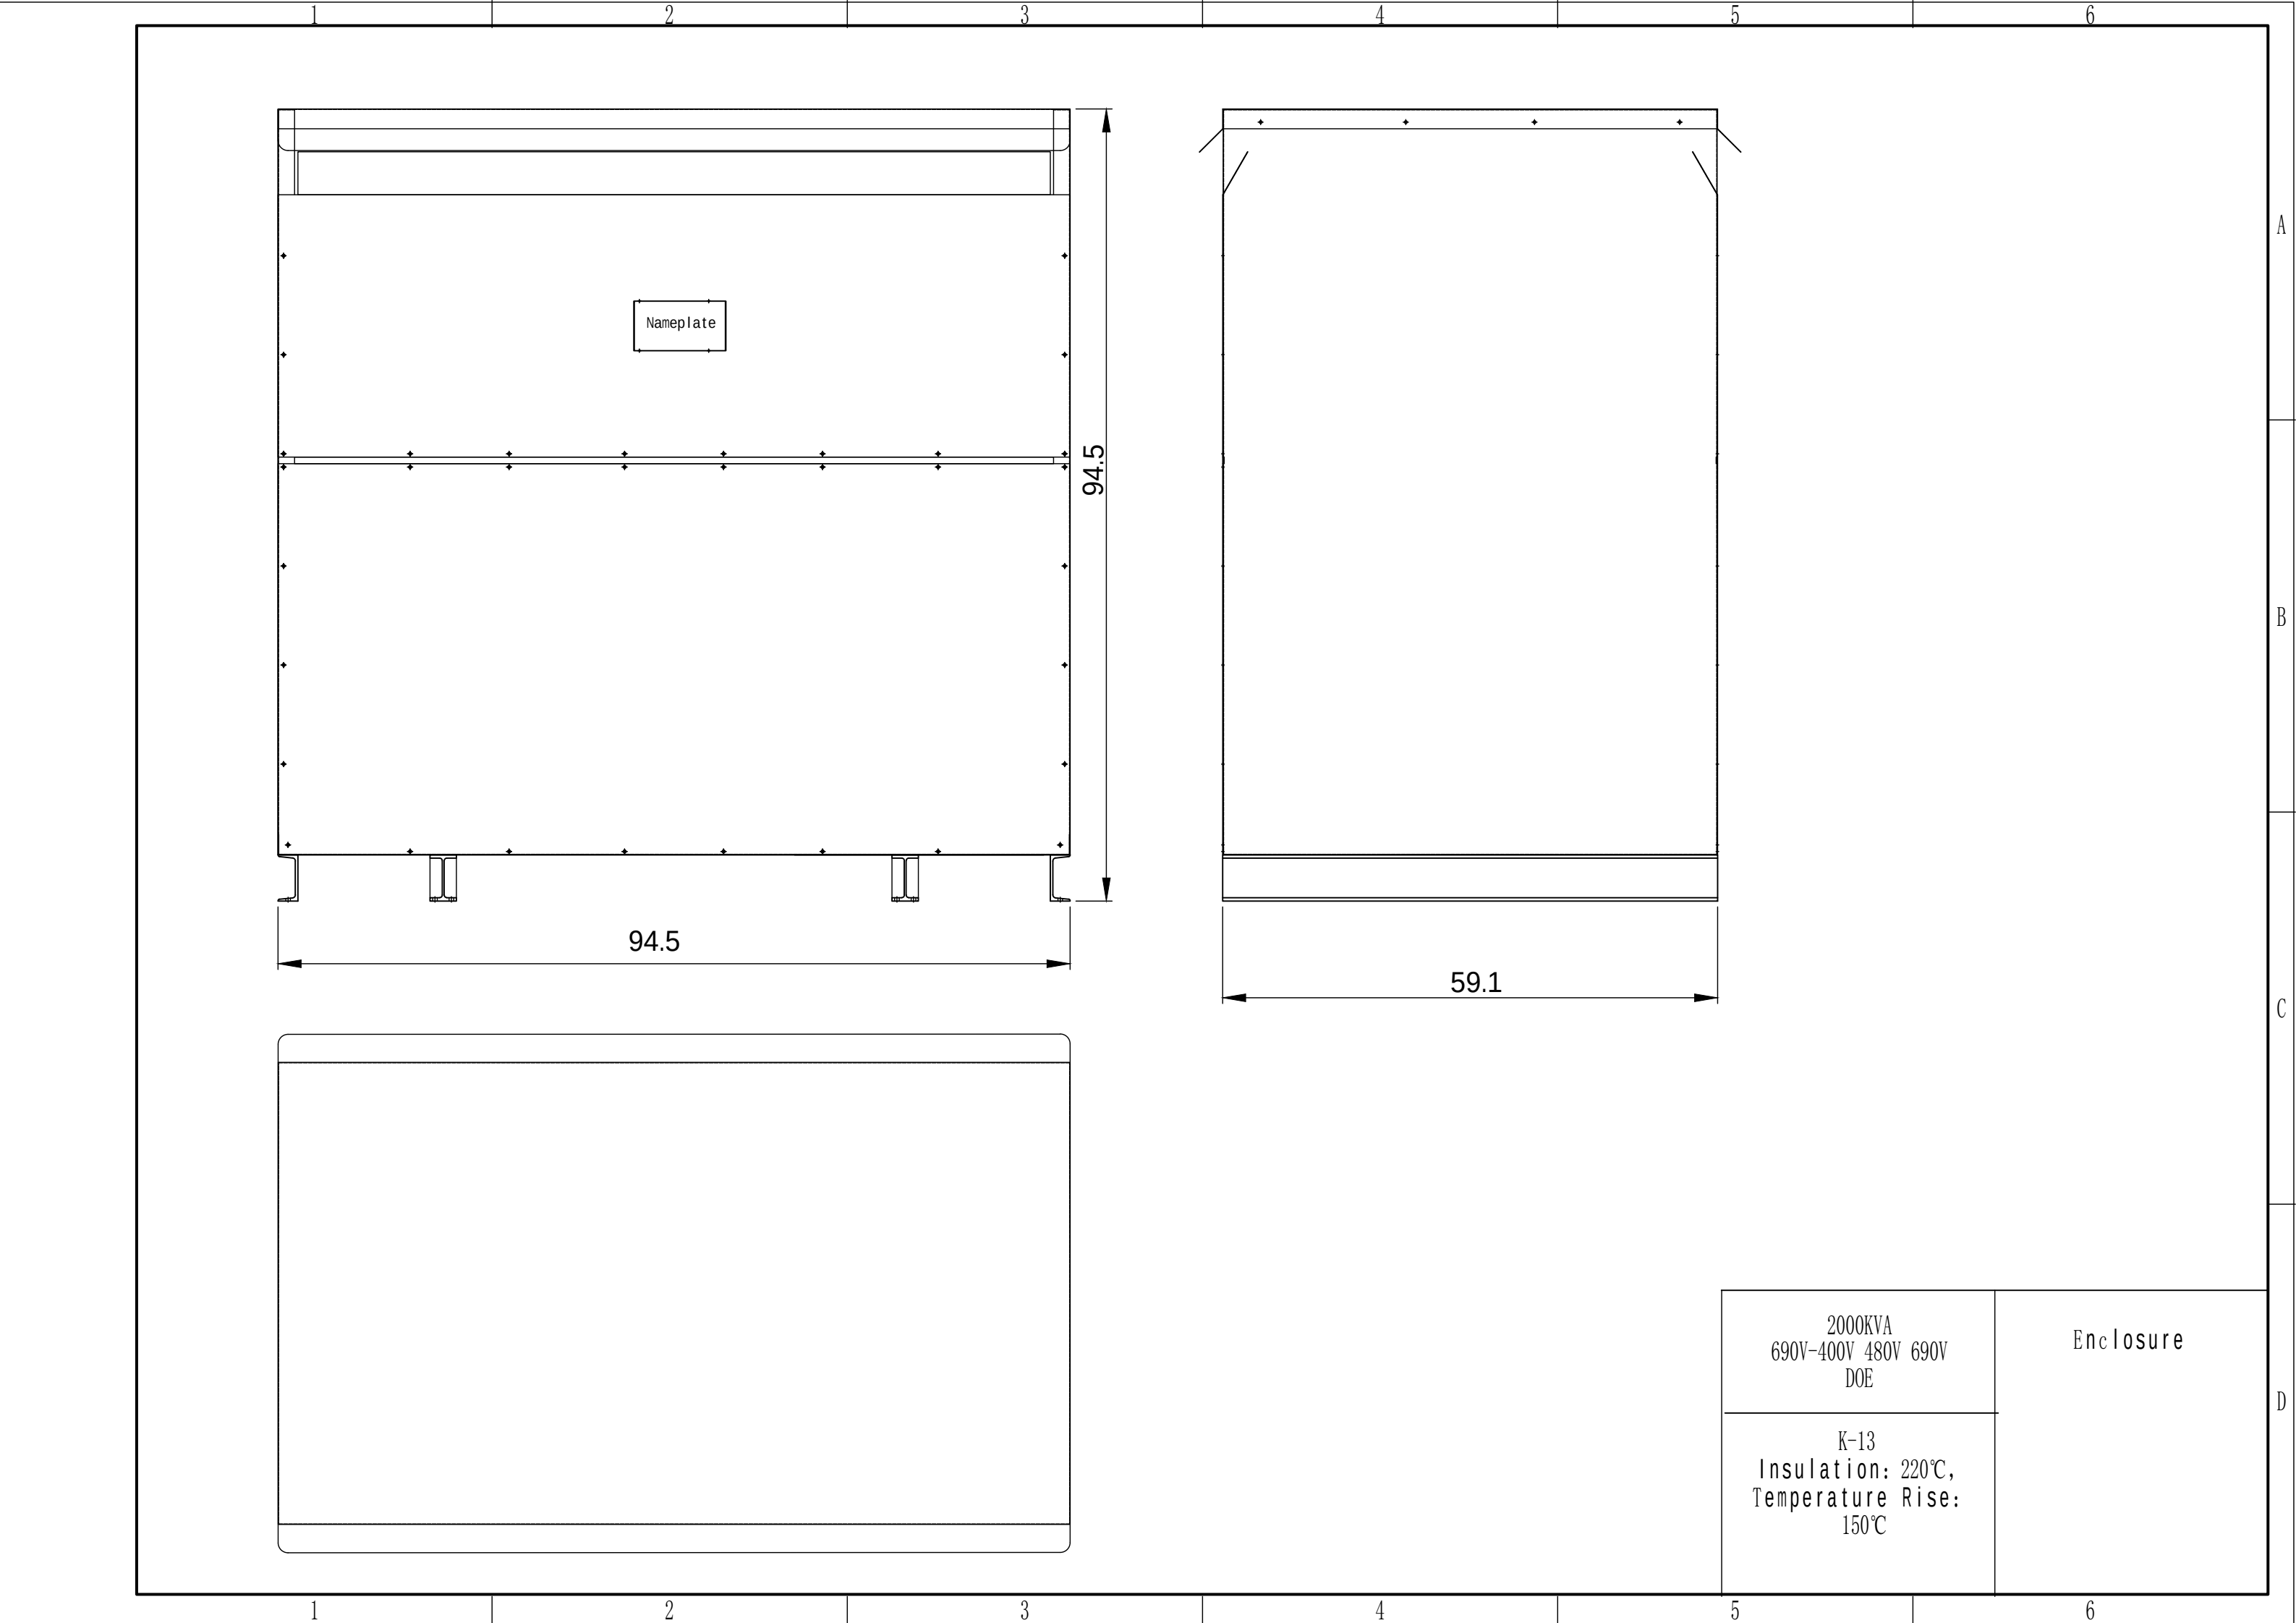


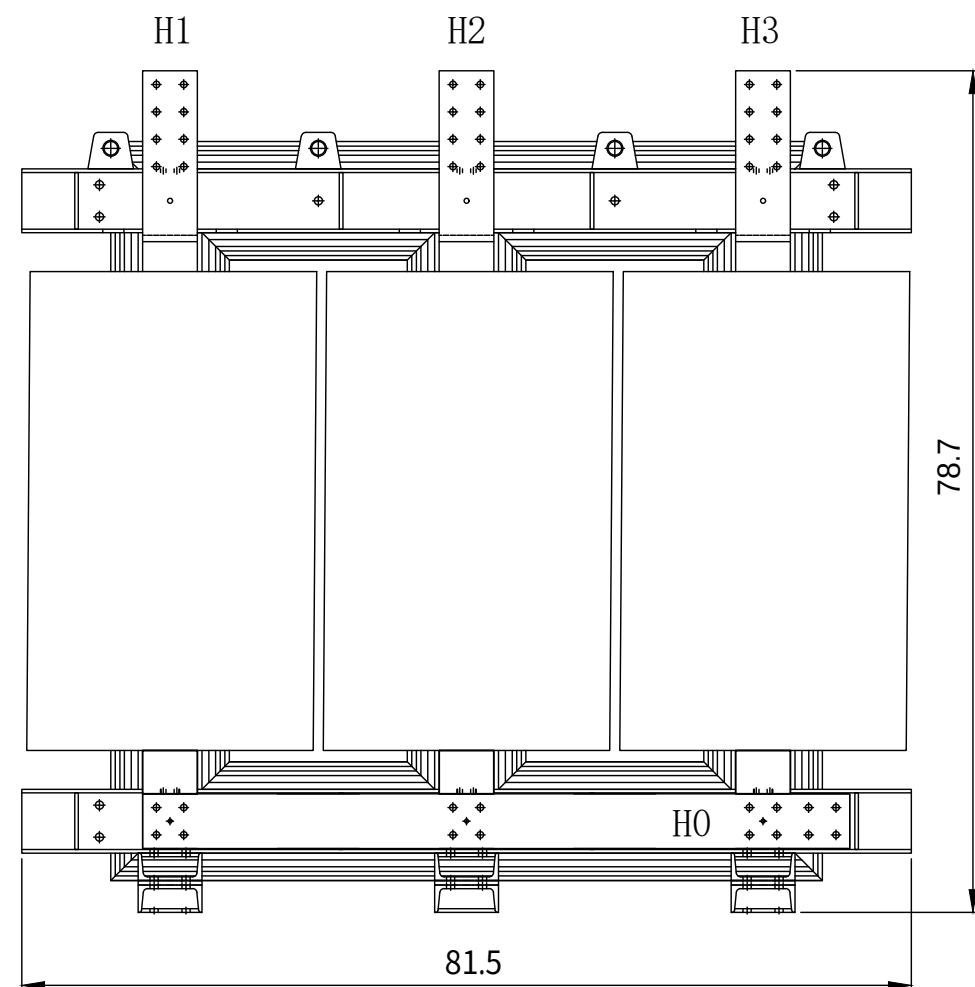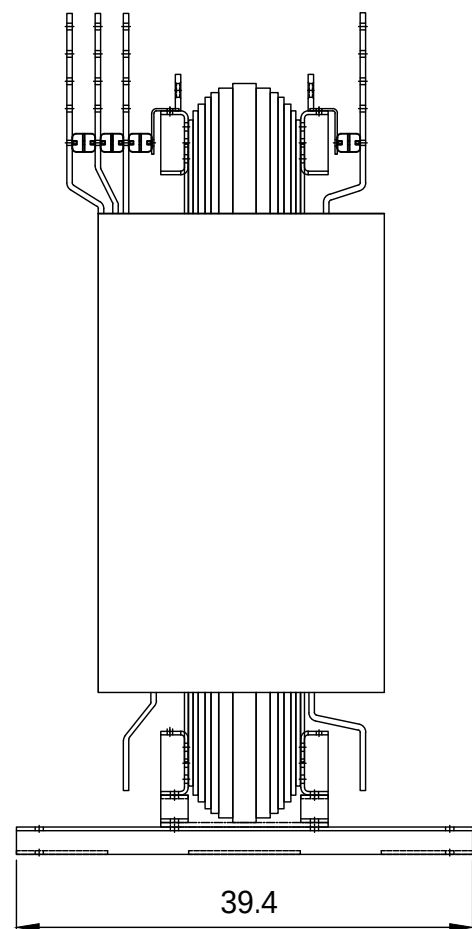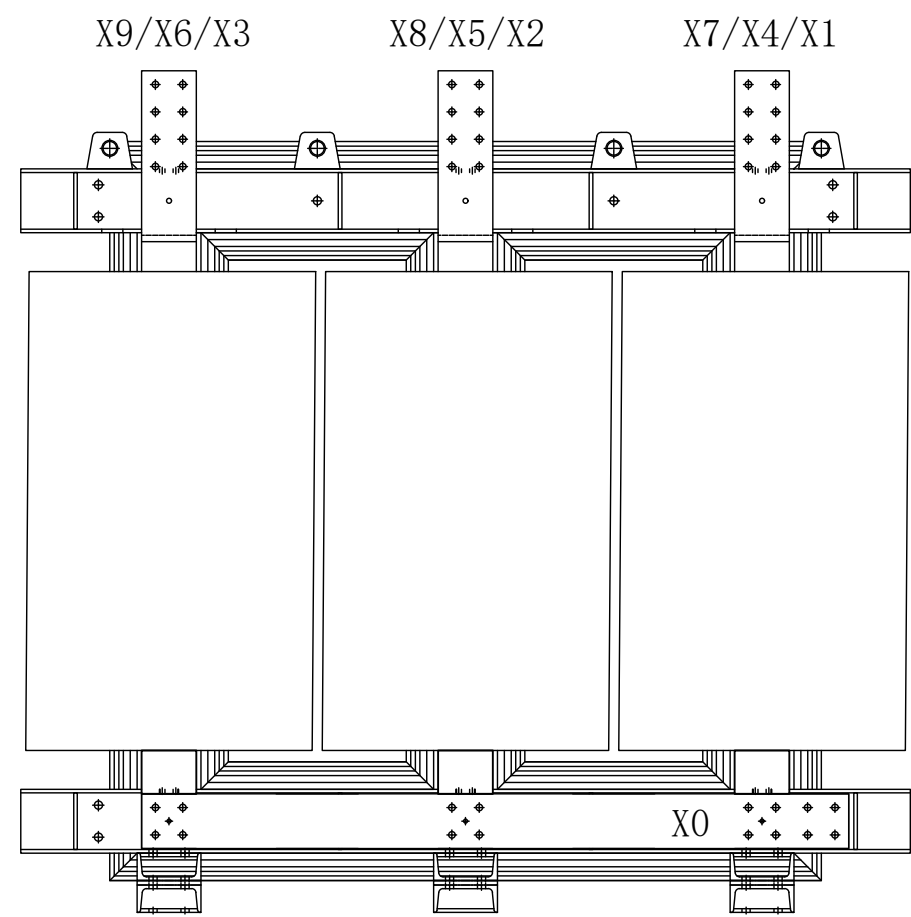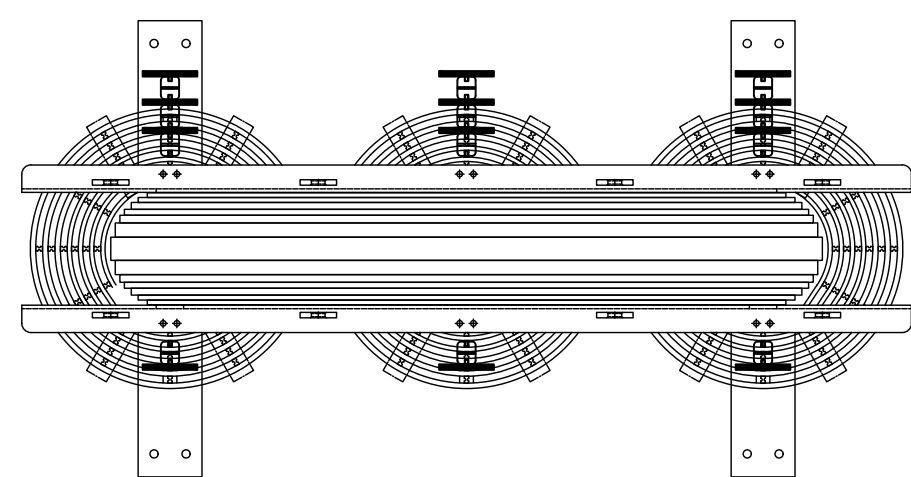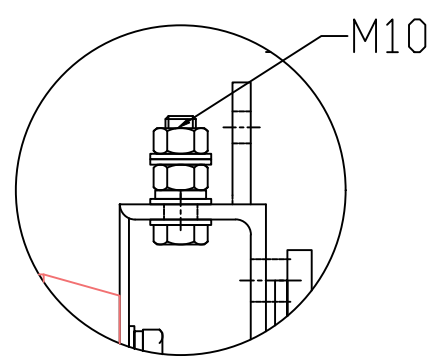


Grounding bolt

Phase	3	Frequency	60Hz
Capacity	2000KVA		
Input	690VAC		
Output	400V 480V 690V		
Vector	Y/y		
Weight	12566.14Lbs		

X1-X2-X3:400V
X1-X2-X3:480V
X1-X2-X3:690V

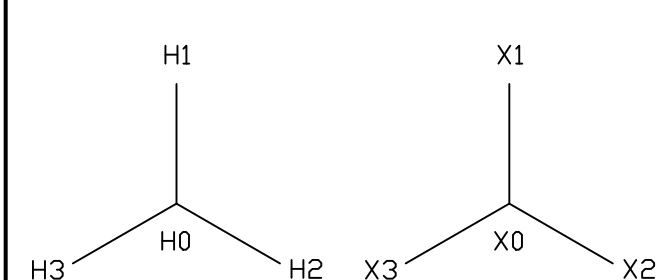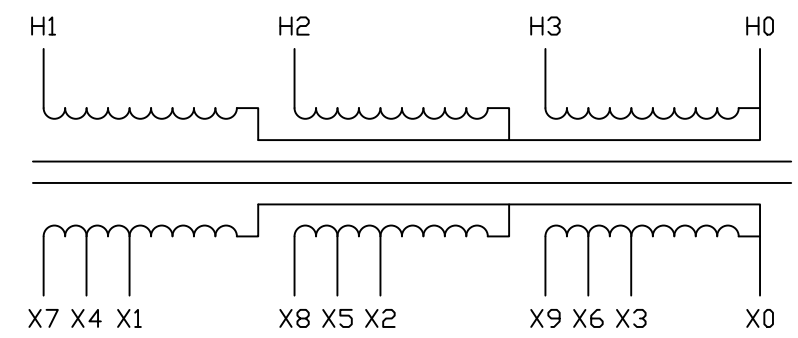

2000KVA 690V-400V 480V 690V DOE	Dry type transformer
K-13 Insulation: 220°C, Temperature Rise: 150°C	

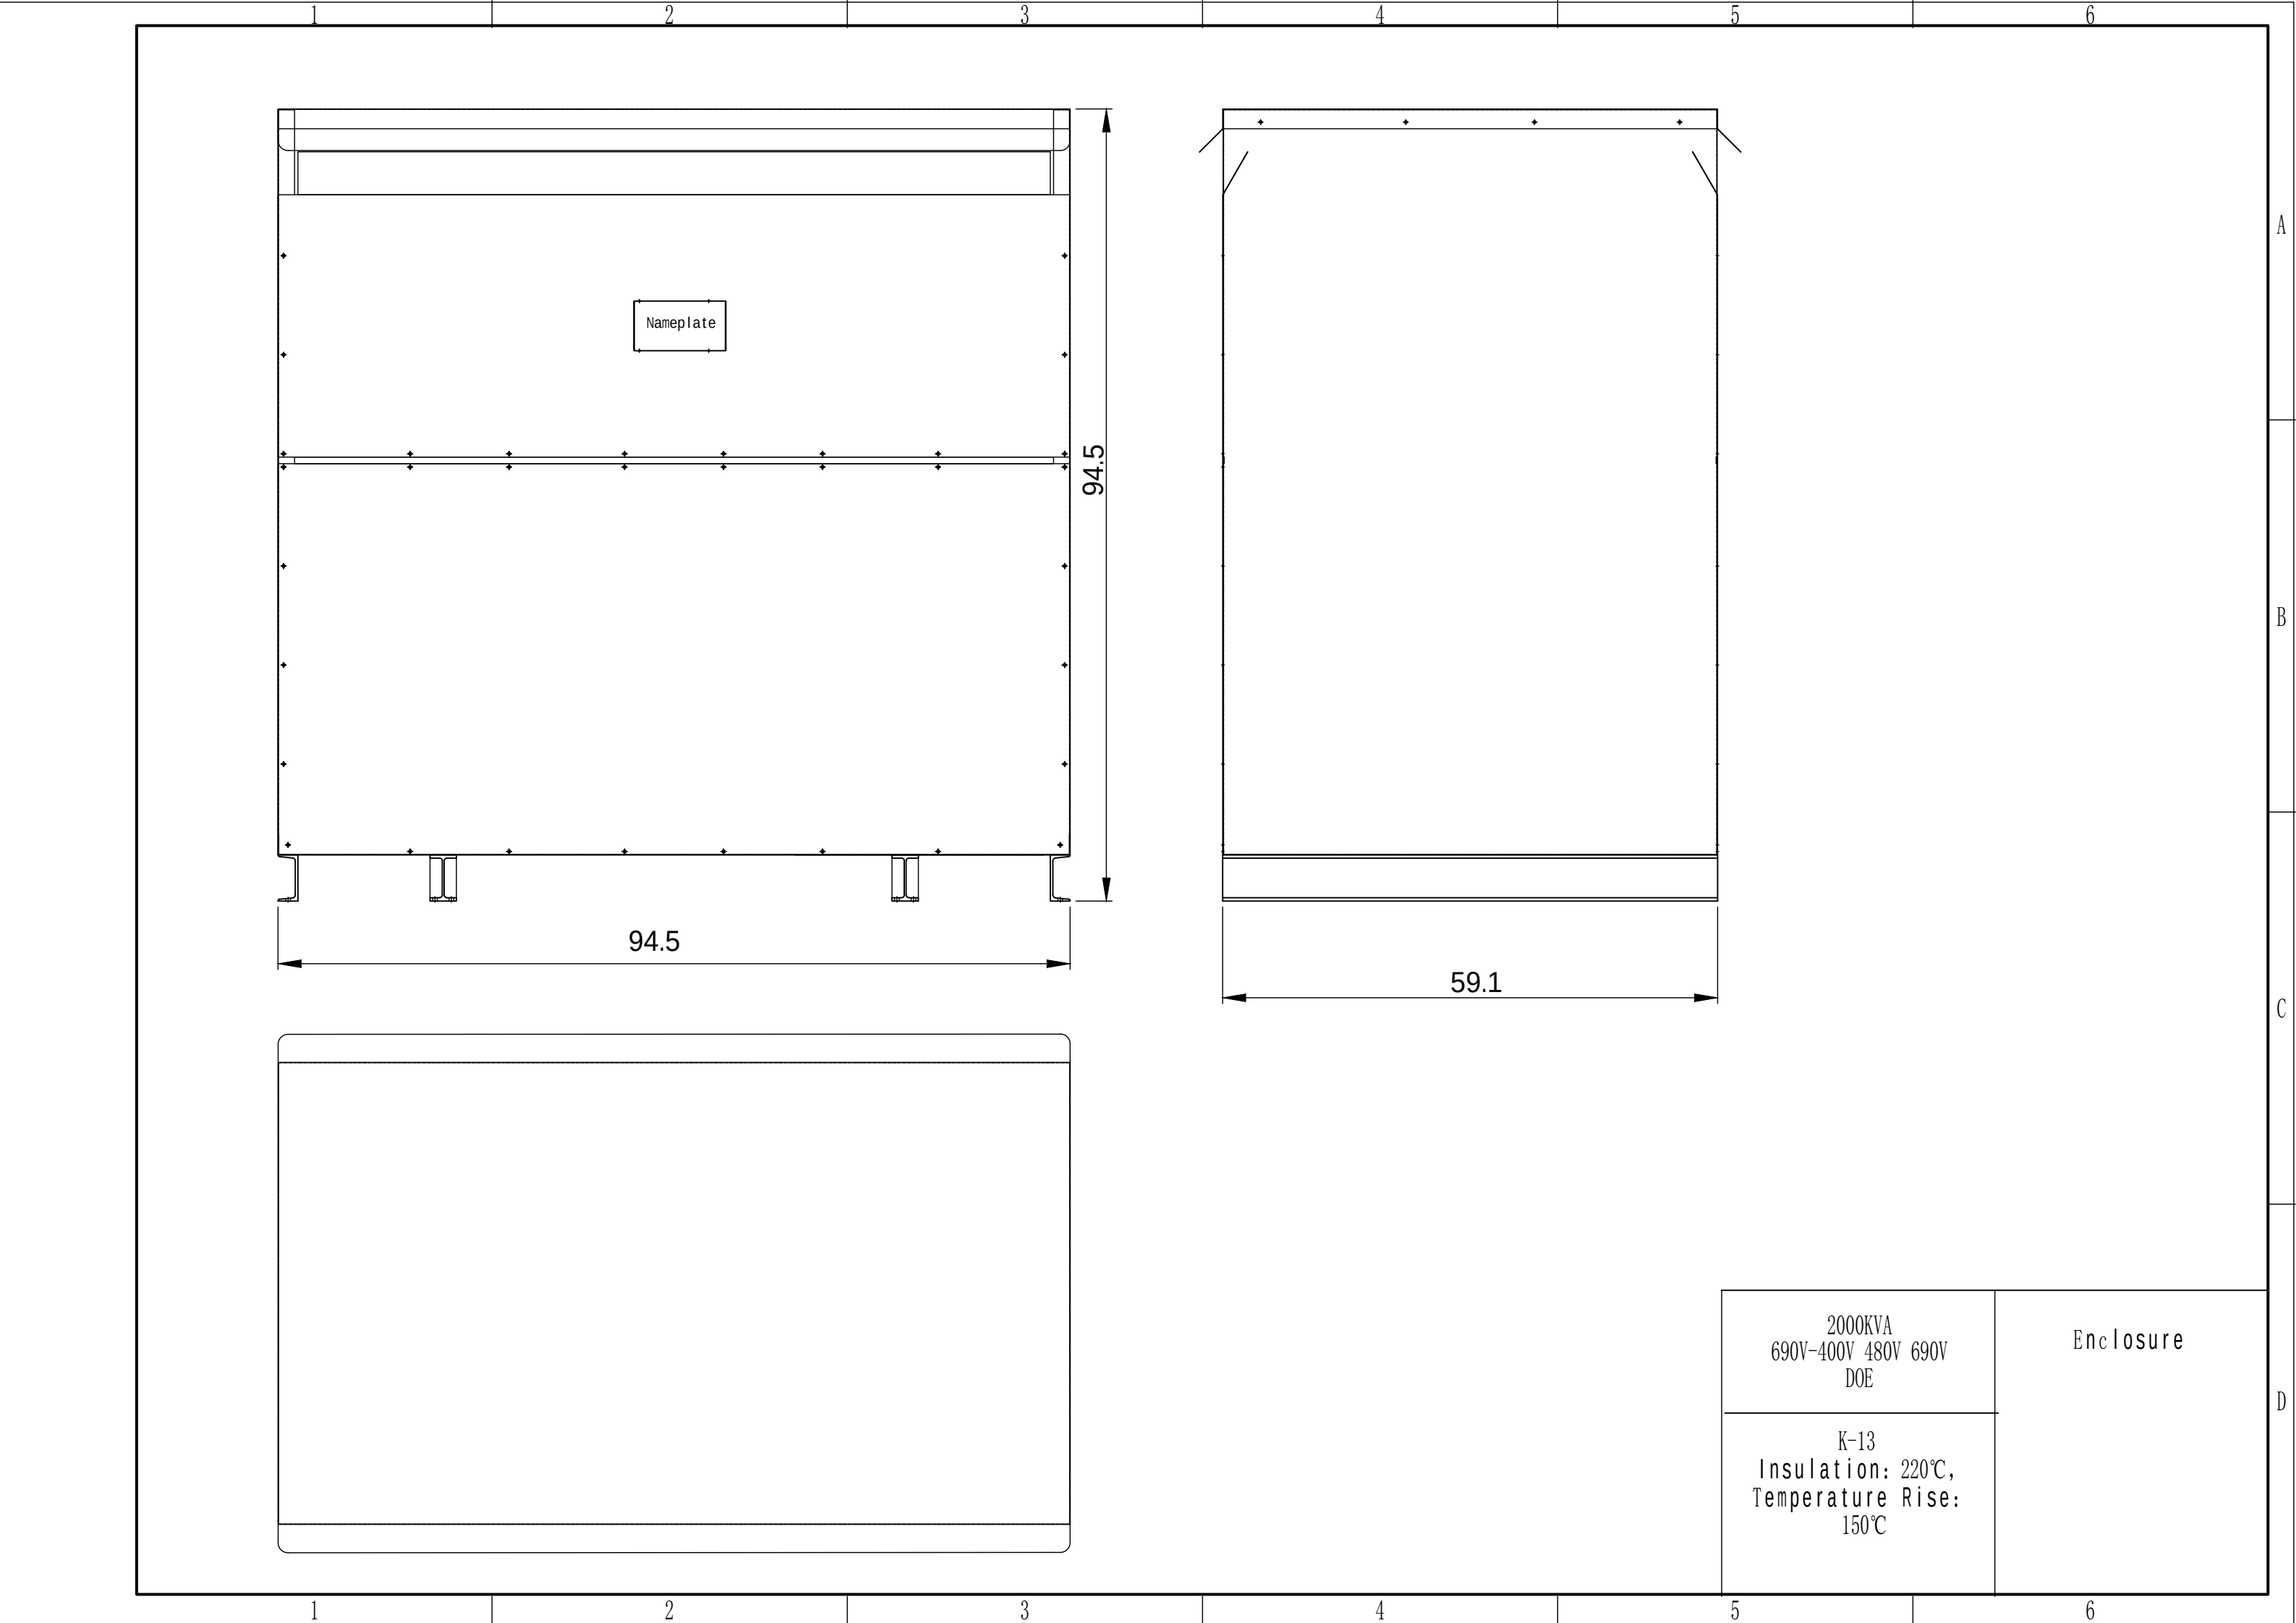







Frequently Asked Questions (FAQ)