Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1

100 KVA Pad Mount Transformer - 12470Y/7200 Grounded Wye Primary, 120/240V Secondary - Mineral Oil Fluid / ONAN - Aluminum Windings

Product ID: 311042



Image: MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 Pad Mount Transformer

Transformer Type: Pad Mounted, Compartmental-Type II
Transformer Configuration: Liquid Filled Pad Mounted
Transformer Feed Type: Loop Feed
Phase: Single Phase
Capacity: 100 KVA
Vector Group: II6
Primary Voltage: 12470Y/7200
Primary Voltage Switch: N/A
Primary Voltage Class: 15 kV Class
Primary Phasor: Grounded Wye
Primary BIL: 95 KV
Secondary Voltage: 120/240V (L-N-L)
Secondary Voltage Class: 1.2 kV Class
Secondary Phasor: Dual Windings, Single Phase

Secondary BIL: 30 KV

Frequency: 60 Hz
Temperature Rise: 65°C
Cooling Class: ONAN; Self-Cooled
Forced Air (Fans): None
Tap Changer: 5-Position Tap Changer
Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps
Tap %: 2.50%
Tap Changer Switch Location: Front Compartment
Impedance: 1.0-4.5% Typical

Ratings

Meets/Exceeds DOE 2016 Efficiency Ratings
Complies with ANSI / IEEE #C57.12.00
Complies with ANSI / IEEE #C57.12.25
Complies with ANSI / IEEE C57 12.28
Complies with ANSI / IEEE C57 12.38
Complies with ANSI / IEEE C57.12.70
Complies with ASTM D3487
Penta-head Entry Assembly
Lift Up Pad lockable Lid
Non-PCB Insulating Fluid
Tamper Proof Housing

Efficiency: 99.00%
Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 85°C Reference Temp.
No Load Loss (in watts)*: +/- 273W
Load Loss (in watts)*: +/- 1,105W
Total Load Loss (in watts)*: +/- 1,378W

Note: *Losses offered are typical only, not guaranteed*

Primary Connection Type: Dead Front
Primary Termination: Cover Mount (Eyebolts), 200A Load Break Elbows w/ Inserts
Primary Connection Qty: (2) Primary Connections w/ (1) Standoff Brackets for Parked Elbows
Primary Surge Arrestors: N/A
Primary Surge Arrestor Voltage Rating: N/A
Primary Surge Arrestor MCOV Rating: N/A
Primary Surge Arrestor Mounting Provision: N/A
Primary Over Current Protection (OCP): Internally Mounted Partial Range Current Limiting Fuse and Bayonet Fuse
Primary Over Current Protection Method: Fused
Primary Over Current Protection Holder: Bayonet Fuse Holder w/ Drip Shield
Primary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Secondary Connection Type: Live Font
Secondary Connections: NEMA Spade Terminals, 8-Hole Spade, Externally Clamped
Secondary Over Current Protection (OCP): N/A
Secondary Connection Qty: (3)
Secondary Grounding Provisions: (1) Grounding lug, accepts #2 copper
Metering Current Transformer (CT): N/A
Metering Panel: N/A
Auxiliary Control Panel : N/A
Load Break Switch: N/A
Load Break Switch Qty: N/A
Load Break Switch Location: N/A
Efficiency Standard(s): Meets DOE 2016 Standards, Meets ANSI/IEEE Standards
K-Factor Rating (Harmonic Mitigation): K-1 (Standard)
Pulse Drive Rating: N/A
Insulation Fluid: Mineral Oil - Non PCB Fluid - Non-PCB Fluid
Fluid Capacity*: 63.56 Gallons
Liquid Level Indicator: Analog Gauge
Temperature Indicator: Analog Gauge
Pressure/Vacuum Indicator: Analog Gauge
Pressure Relief Device: Included, Automatic Action
Fill Valve: Removable Bolt
Fill Valve Location: Front Compartment
Drain Valve: Included, w/ Sampler
Drain Valve Location: Front Compartment
Winding Material: Aluminum
Ambient Temperature Rating: 40°C
Sound Level: 51 dBA
Elevation (Altitude): 3300ft (1000 meters) Above Sea Level or Below
Core Material: Grain Oriented Silicon Steel
Tank Material: Coated Steel
Cabinet Material: Coated Steel
Base Platform Material: Coated Steel
Housing Type: Tamper Resistant w/ Pad-lockable Lift-up Lid
Paint Type: Weatherproof and UV Resistant Epoxy Coating and Undercoating
Finish Color: Munsell™ 7.0 GY 3.29/1.5 Bell Green
Mounting: Pad Mount
Conduit Opening: Bottom Feed Underground Entry/Exit
Dimensions*: 37.4"-W x 44.8"-D x 29.2"-H
Weight*: 1455 Lbs
*Please note that numbers are approximate and subject to change

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 Industrial Pad Mount Transformer from Larson Electronics offers powerful, reliable and efficient power distribution in indoor, outdoor, and public locations. The low operating costs, low heat emissions and low cost of ownership makes this transformer ideal for a wide range of applications and businesses. An enclosed design caters to installations on concrete pads without protective fencing.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 100 kVA, the industrial transformer features a primary voltage of single-phase 12470Y/7200 Grounded Wye and a secondary voltage of single-phase 120/240V (L-N-L). The unit has a primary loop feed and dead-front primary connections. We also offer systems with radial feed and dead front primary/live front secondary connections. This transformer features a 5-position tap changer with (2) +/- 2.5% taps above and (2) +/- 2.5% taps below to allow small changes for voltage. This pad mount transformer features primary well bushings and standard spade connectors on the secondary side. Equipped with aluminum windings, this transformer consists of one coil and two core loops.

The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 is air cooled and does not have fans or mounting provision for fans. This unit features a 65°C temperature rise for reduced heat waste, increased reliability and longer life. The transformer meets DOE 2016 efficiency standards. The combination of low temperature rise and high efficiency makes this unit suitable for use in electrical rooms, air conditioned spaces in buildings, underground vaults and similar locations, in addition to outdoor areas.

Insulation Fluid: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 features mineral oil insulation fluid. We offer transformers with FR-3 oil fluid, if needed.

Gauges: The following gauges are included with the system: liquid level, temperature and pressure/vacuum gauges. Standard liquid level, temperature and pressure/vacuum gauges are analog, manual reading types. These gauges do not have auxiliary contacts.

Fault Pressure Devices: This transformer features an automatic action fault pressure device. Fault pressure devices are used to detect high rates of pressure rise within the tank.

Rapid Rise Relay: There are no rapid rise relays on the unit. This safety component is designed for protection when a rapid increase in tank pressure occurs. The relay is suitable for detecting sudden pressure fluctuations above predetermined safe limits.

Surge arresters: This system doesn't come with surge protection. Mounting provisions for installing customer provided lightning arrestor on the H1 and H2 primary terminal are included for installing arresters in-field.

Load Breaker Switch: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 isn't equipped with a load break switch.

Valves: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 is equipped with a fill valve and drain valve with sampler port.

Protection Fuses: This transformer contains protection fuses on the primary side. For units without protection fuses, up stream protection is provided. We recommend provisions for protection fuses when possible, as blown fuses may require more frequent oil changes.


Mount: The heavy-duty enclosure makes the unit suitable for both indoor and outdoor


applications. This power distribution system can be pad mounted on concrete pads.


Benefits: The MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1 pad mount transformer offers many benefits to consumers. This transformer provides owners with significant energy savings, as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.


Applications: General purposes, industrial sites, electrical rooms, underground vaults, manufacturing facilities, steel plants, offshore, commercial, military, processing plants, electric power distribution, utilities, public locations and more.


Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

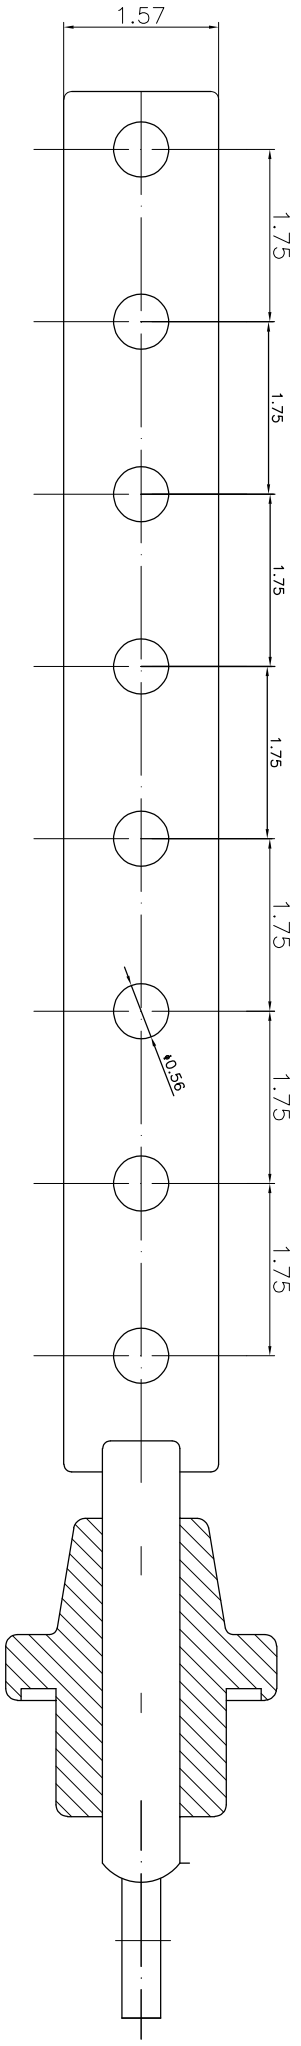

1.57
1.75
1.75
1.75
1.75
1.75
1.75
1.75
ø0.56

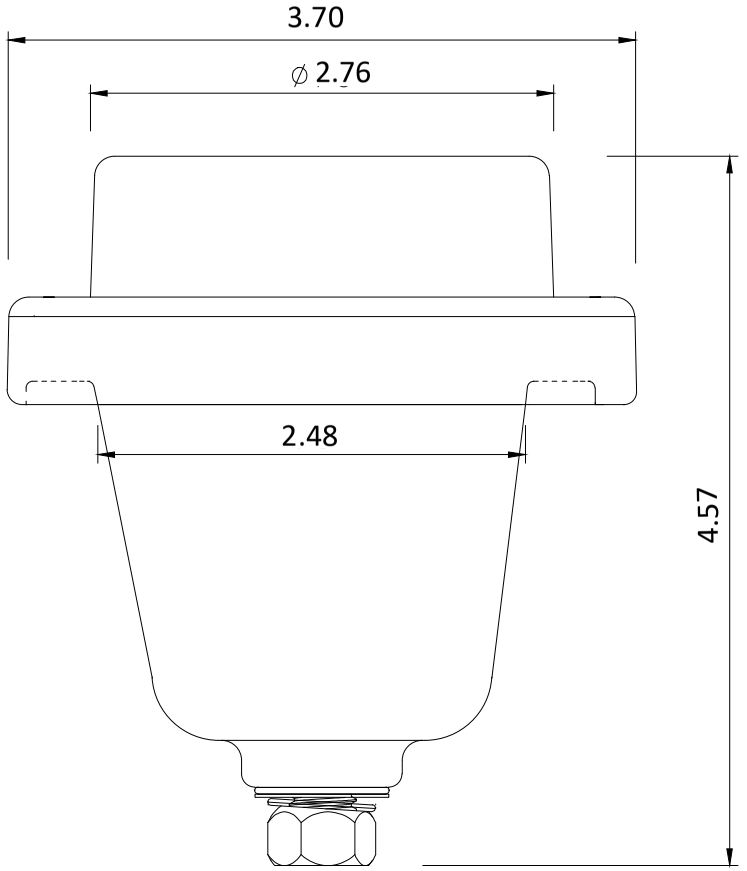

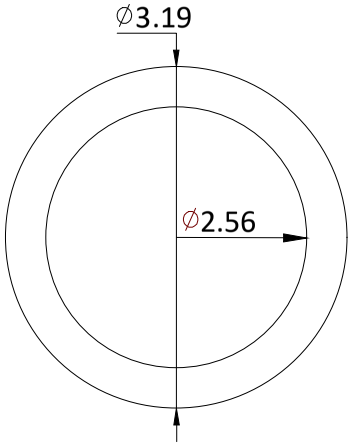

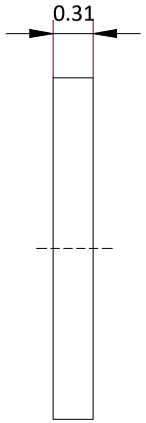

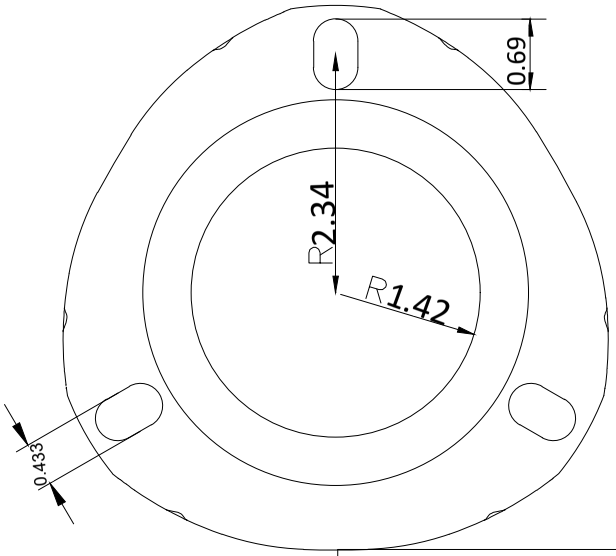

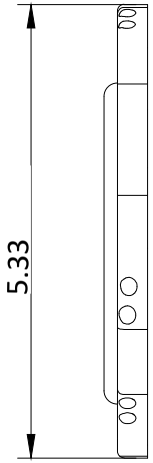



200A Well

Installation hole should be 2.56


Remark: dimensions here are in inches.


Designed			G001	Product Name	200A well
Checked					
		Date	2023.06	Model	

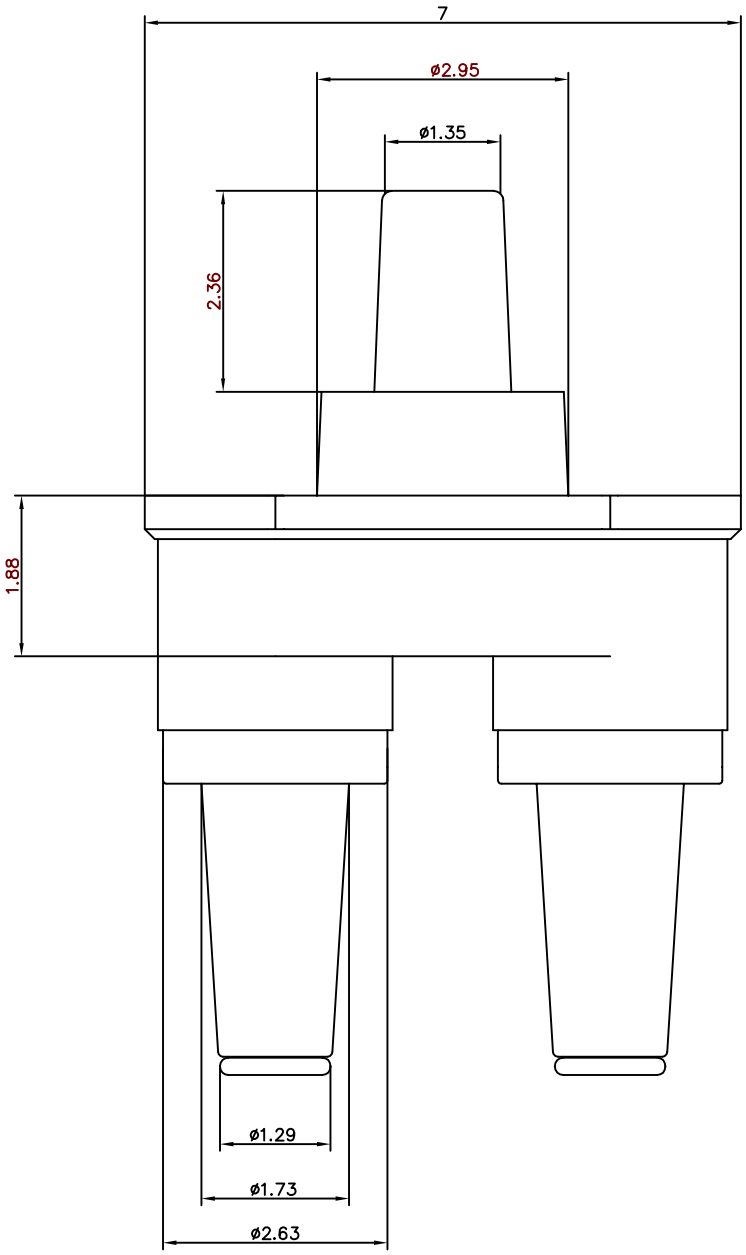

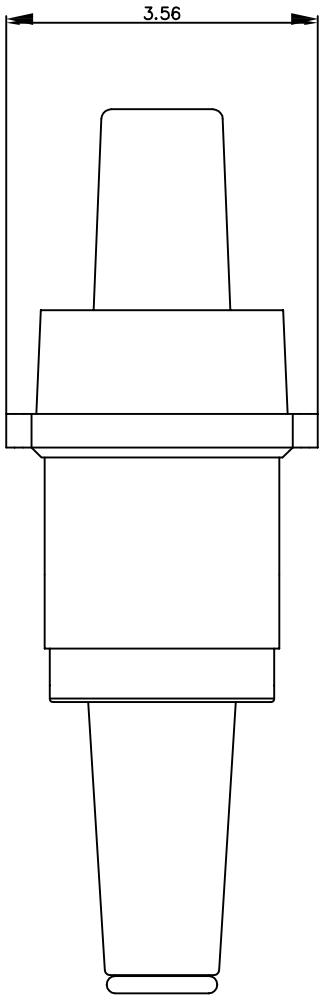

Designed		No.	G002	Name	200A Rotatable feedthru insert
Audited		Scale			
Standard	GB/T12706.4-2008 IEEEstd386-2006	Date	July 2013	Model	

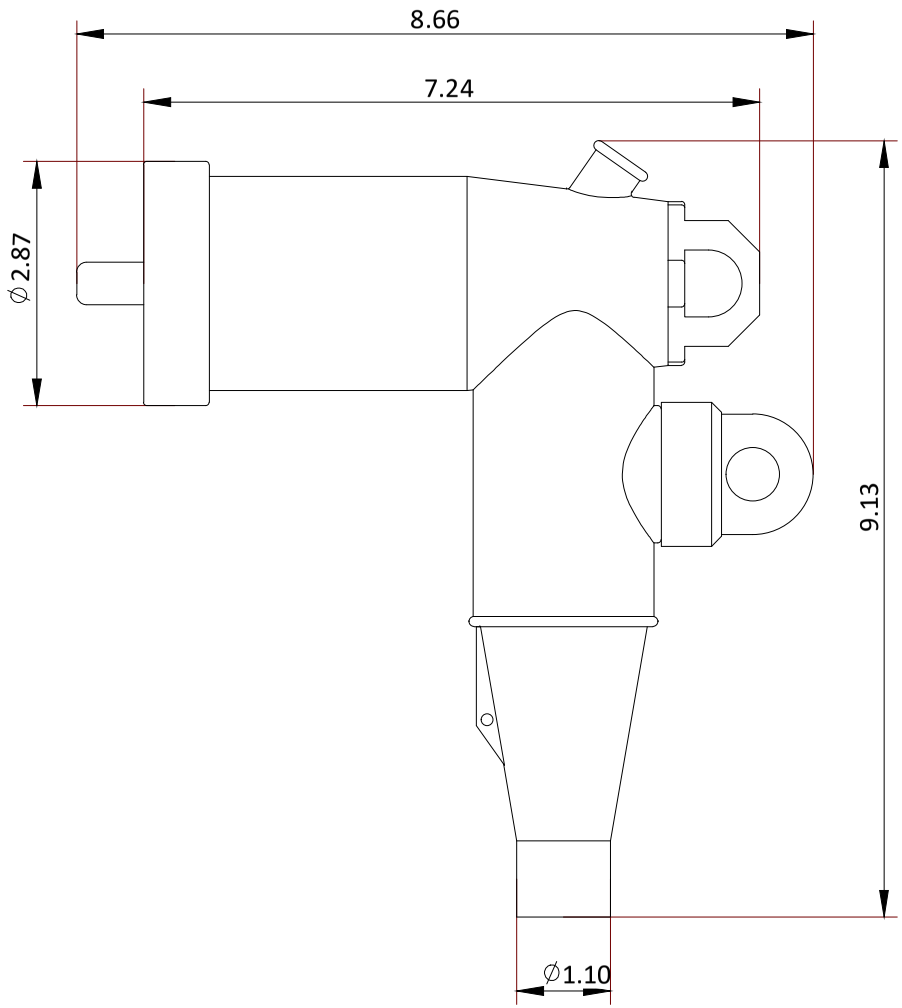


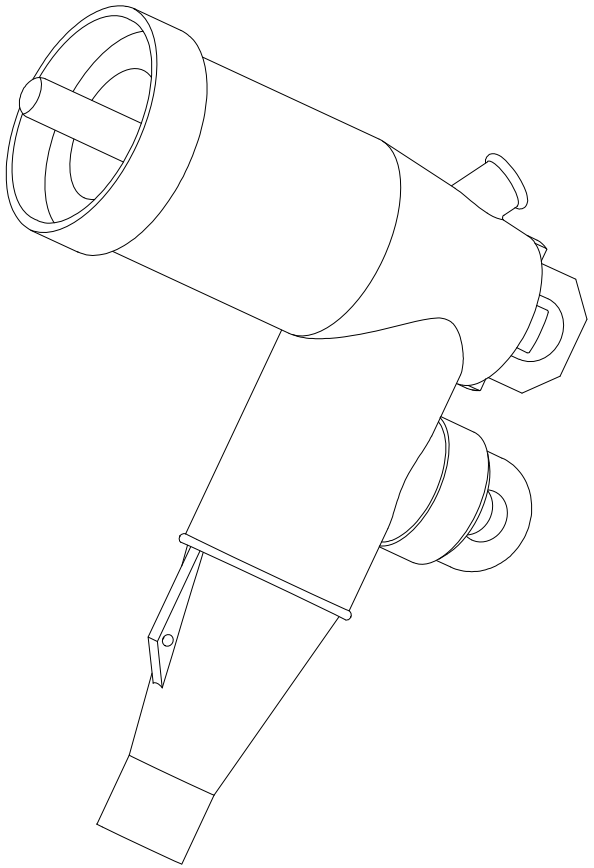


Designed			G004	Product Name	200A Load Break Elbow
Checked					
		Date	2023. 6	Model	

Remark: dimensions here are in inches.


MT-PML-R7-1P-GMR-100KVA-SLZ-LT-DF-A6-BM-AZ-ZCZ-M1

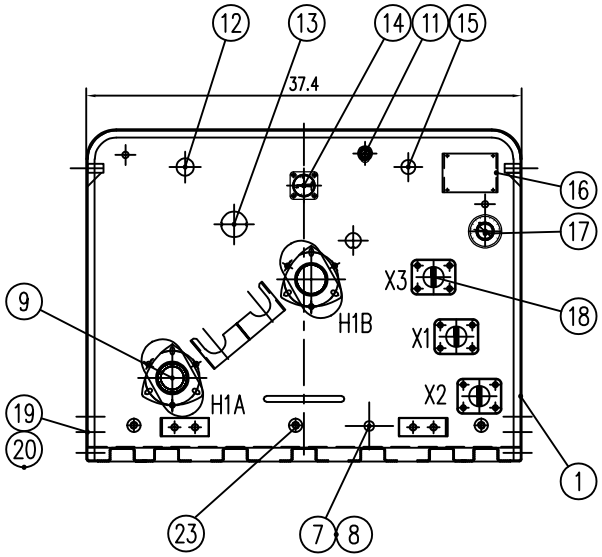

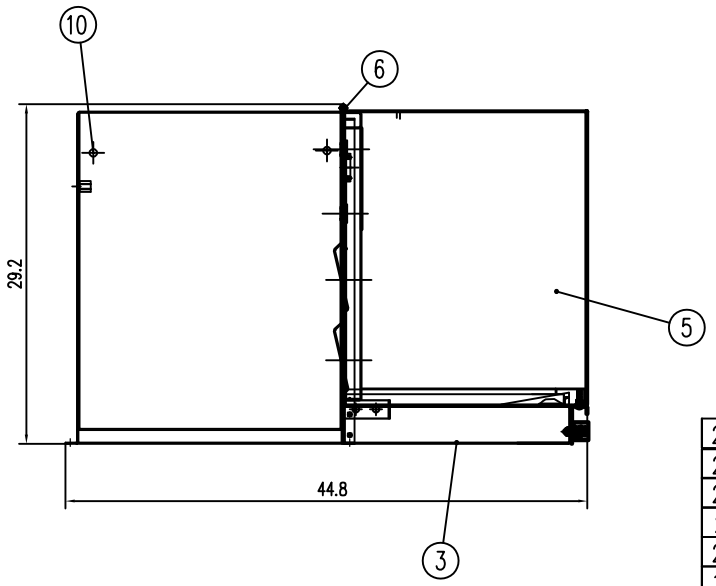


Weight sheet: lbs

Body weight	Oil	Total
595	569	1455

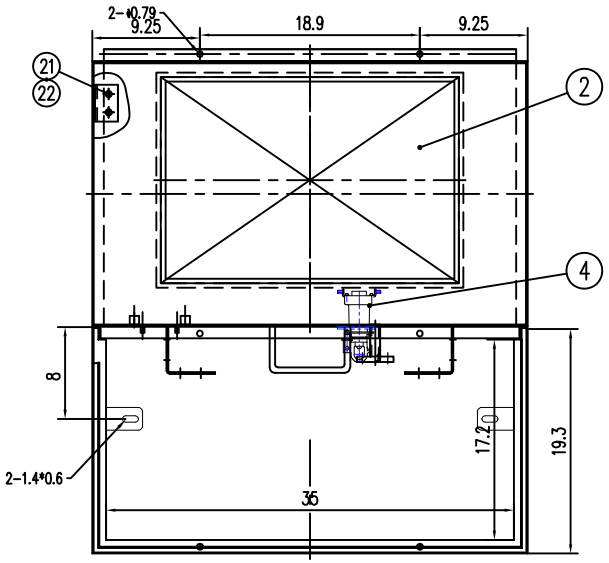

wiring diagram

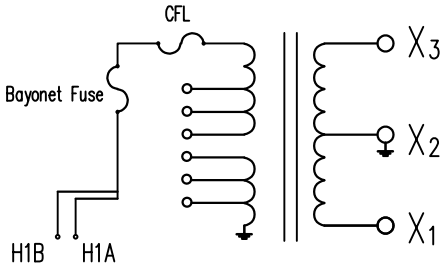

No	Code	Name	QTY	Material	Unit Weight	Total Weight	Remark
24		painting	1	Munsell green			
23		grounded nut	3				
22		current limiting fuse	1				
21		fuse holder	2				
20		nut M8	4				
19		bolt M8X25	4				
18		LV bushing	3				8-hole single raw spade
17		thermometer	1				
16		nameplate	1				
15		pressure indicator	1				
14		oil level indicator	1				
13		bayonet fuse	1				
12		oil filler plug	1				
11		Pressure relief valve	1				
10		lifting lug	4				
9		HV bushing	2	200A loadbrea			with (1) arrester
8		insulation oil	1	Biodegradable oil			
7		drain valve	1				
6		hinge axis	2				
5		tank cover	1				
4		tap changer switch	1				
3		tank base	1				
2		coverplate	1				
1		tank	1				

scanned
checked
signature
date

Remark: dimensions here are in inches. Only for approval/preliminary design..

revision | signature | date

designed | standard
checked | examined
audited | approved
crafted | date

Pad Mounted Transformer
12470GrdY/7200V
240/120V, 116, 100kVA

pattern mark | mass | scale
page | page

LARSON ELECTRONICS


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

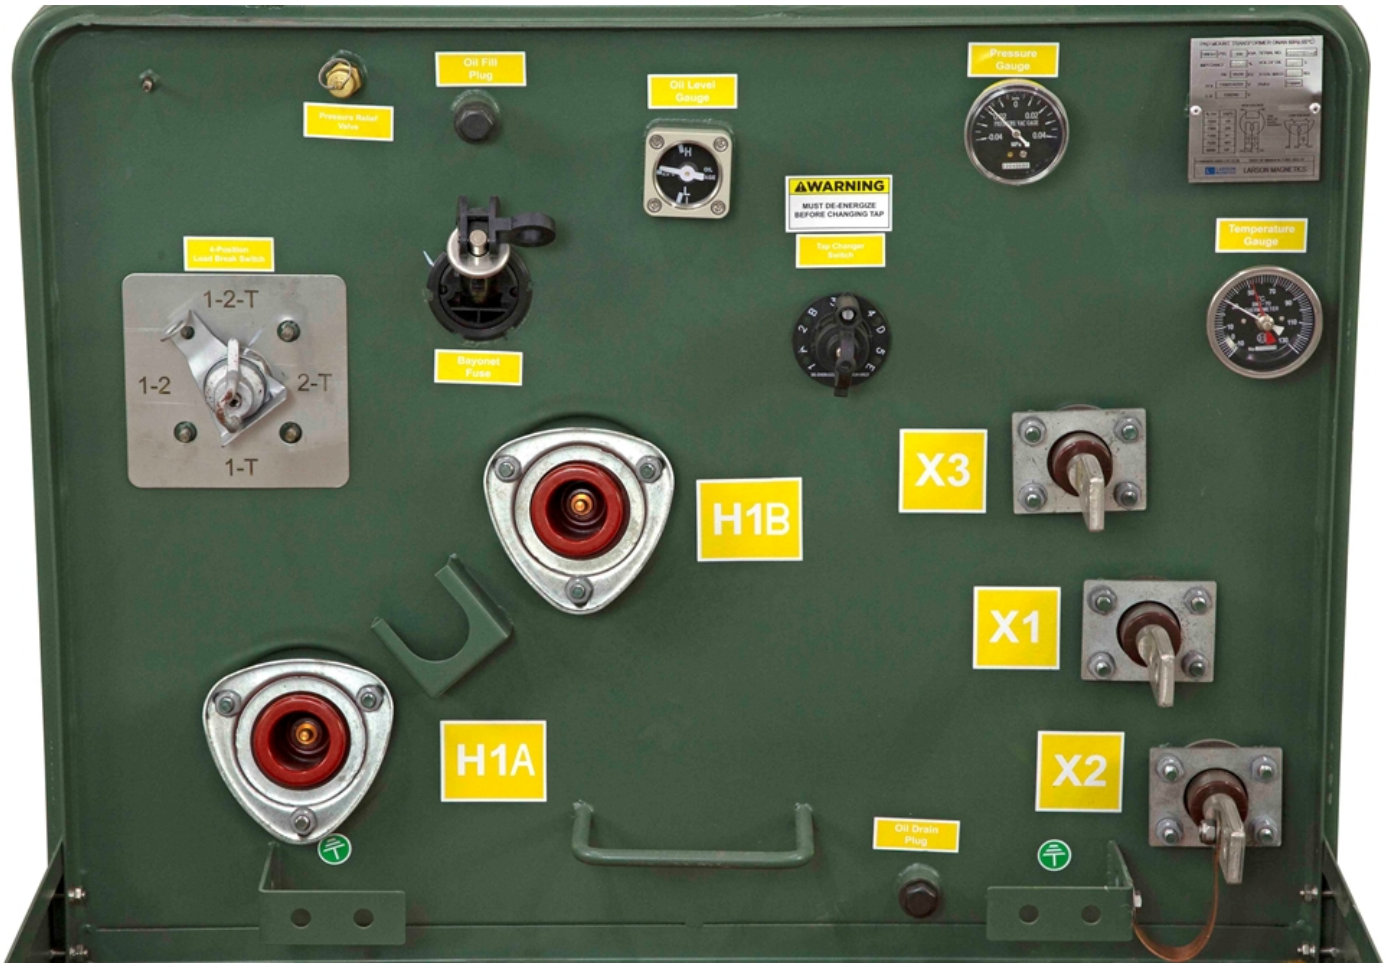

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

There are no Faqs