

EPS-2XPB-ESTP-480V

Explosion Proof Switch 480V w/ E-stop - C1D1/C2D1 - (2) Stop/Start PBs (1) E-Stop PB - Double Gang Box

Product ID: 315065



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPS-2XPB-ESTP-480V Explosion Proof Push Button Switch

Unit Type: Explosion Proof Push Button Switch

Dimensions: -

Voltage: 480 V AC

Horsepower: 1HP @ 120V AC / 2HP @ 250V AC

Amp Rating: 10A

Switch Style: (2) Push Buttons (Stop/Start)

Emergency Stop: (1) Mushroom Push Button - Red

Materials: Non-sparking Aluminum

Termination Options: Dead End or Feed Thru

Hub Options: 1/2" or 3/4" NPT

Ratings/Approvals

Class I, Div 1&2, Groups C,D

Class II, Div 1&2, Groups E,F,G

Class III, Div 1&2

NEMA 7 (Groups C & D)

NEMA 9 (Groups E, F, G)

Certified to USA/Canadian Standards

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The Larson Electronics EPS-2XPB-ESTP-480V Explosion Proof Push Button Switch is suitable for motor and electrical control in flammable work sites. The 10-amp device features two, start/stop push buttons and one, emergency-stop mushroom push button. This NEMA-rated unit is constructed of non-sparking aluminum and takes on a double-gang box configuration.

The EPS-2XPB-ESTP-480V is designed for use in Class I, Divisions 1 & 2; Class II, Divisions 1 & 2; and Class III, Divisions 1 & 2 facilities. Rated at 20 amps, this explosion proof unit accepts currents ranging between 480V AC. The device

features one, mushroom push button (red) which serves as an emergency stop. The unit also contains stop (red) and start (green) push buttons. The EPS-2XPB-ESTP-480V is constructed of non-sparking aluminum and is triple coated. The entire unit is completely corrosion resistant and is NEMA rated.

Wiring/Mounting: Operators can completing wiring and mounting via a 1/2" or 3/4" NPT hub. Termination options include dead end or feed thru.


Suggested Applications: Hazardous locations, oil and gas sites, agricultural operations, grain storage, woodshops, motor control and more.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

	8	7	6	5	4	3	2	1
	REV	DESCRIPTION						DATE
	A	PRODUCTION RELEASE						02-26-2025
EPS-2XPB-ESTP-480V-XX-XX 								
	8	7	6	5	4	3	2	1


EPS-2XPB-ESTP-480V-XX-XX



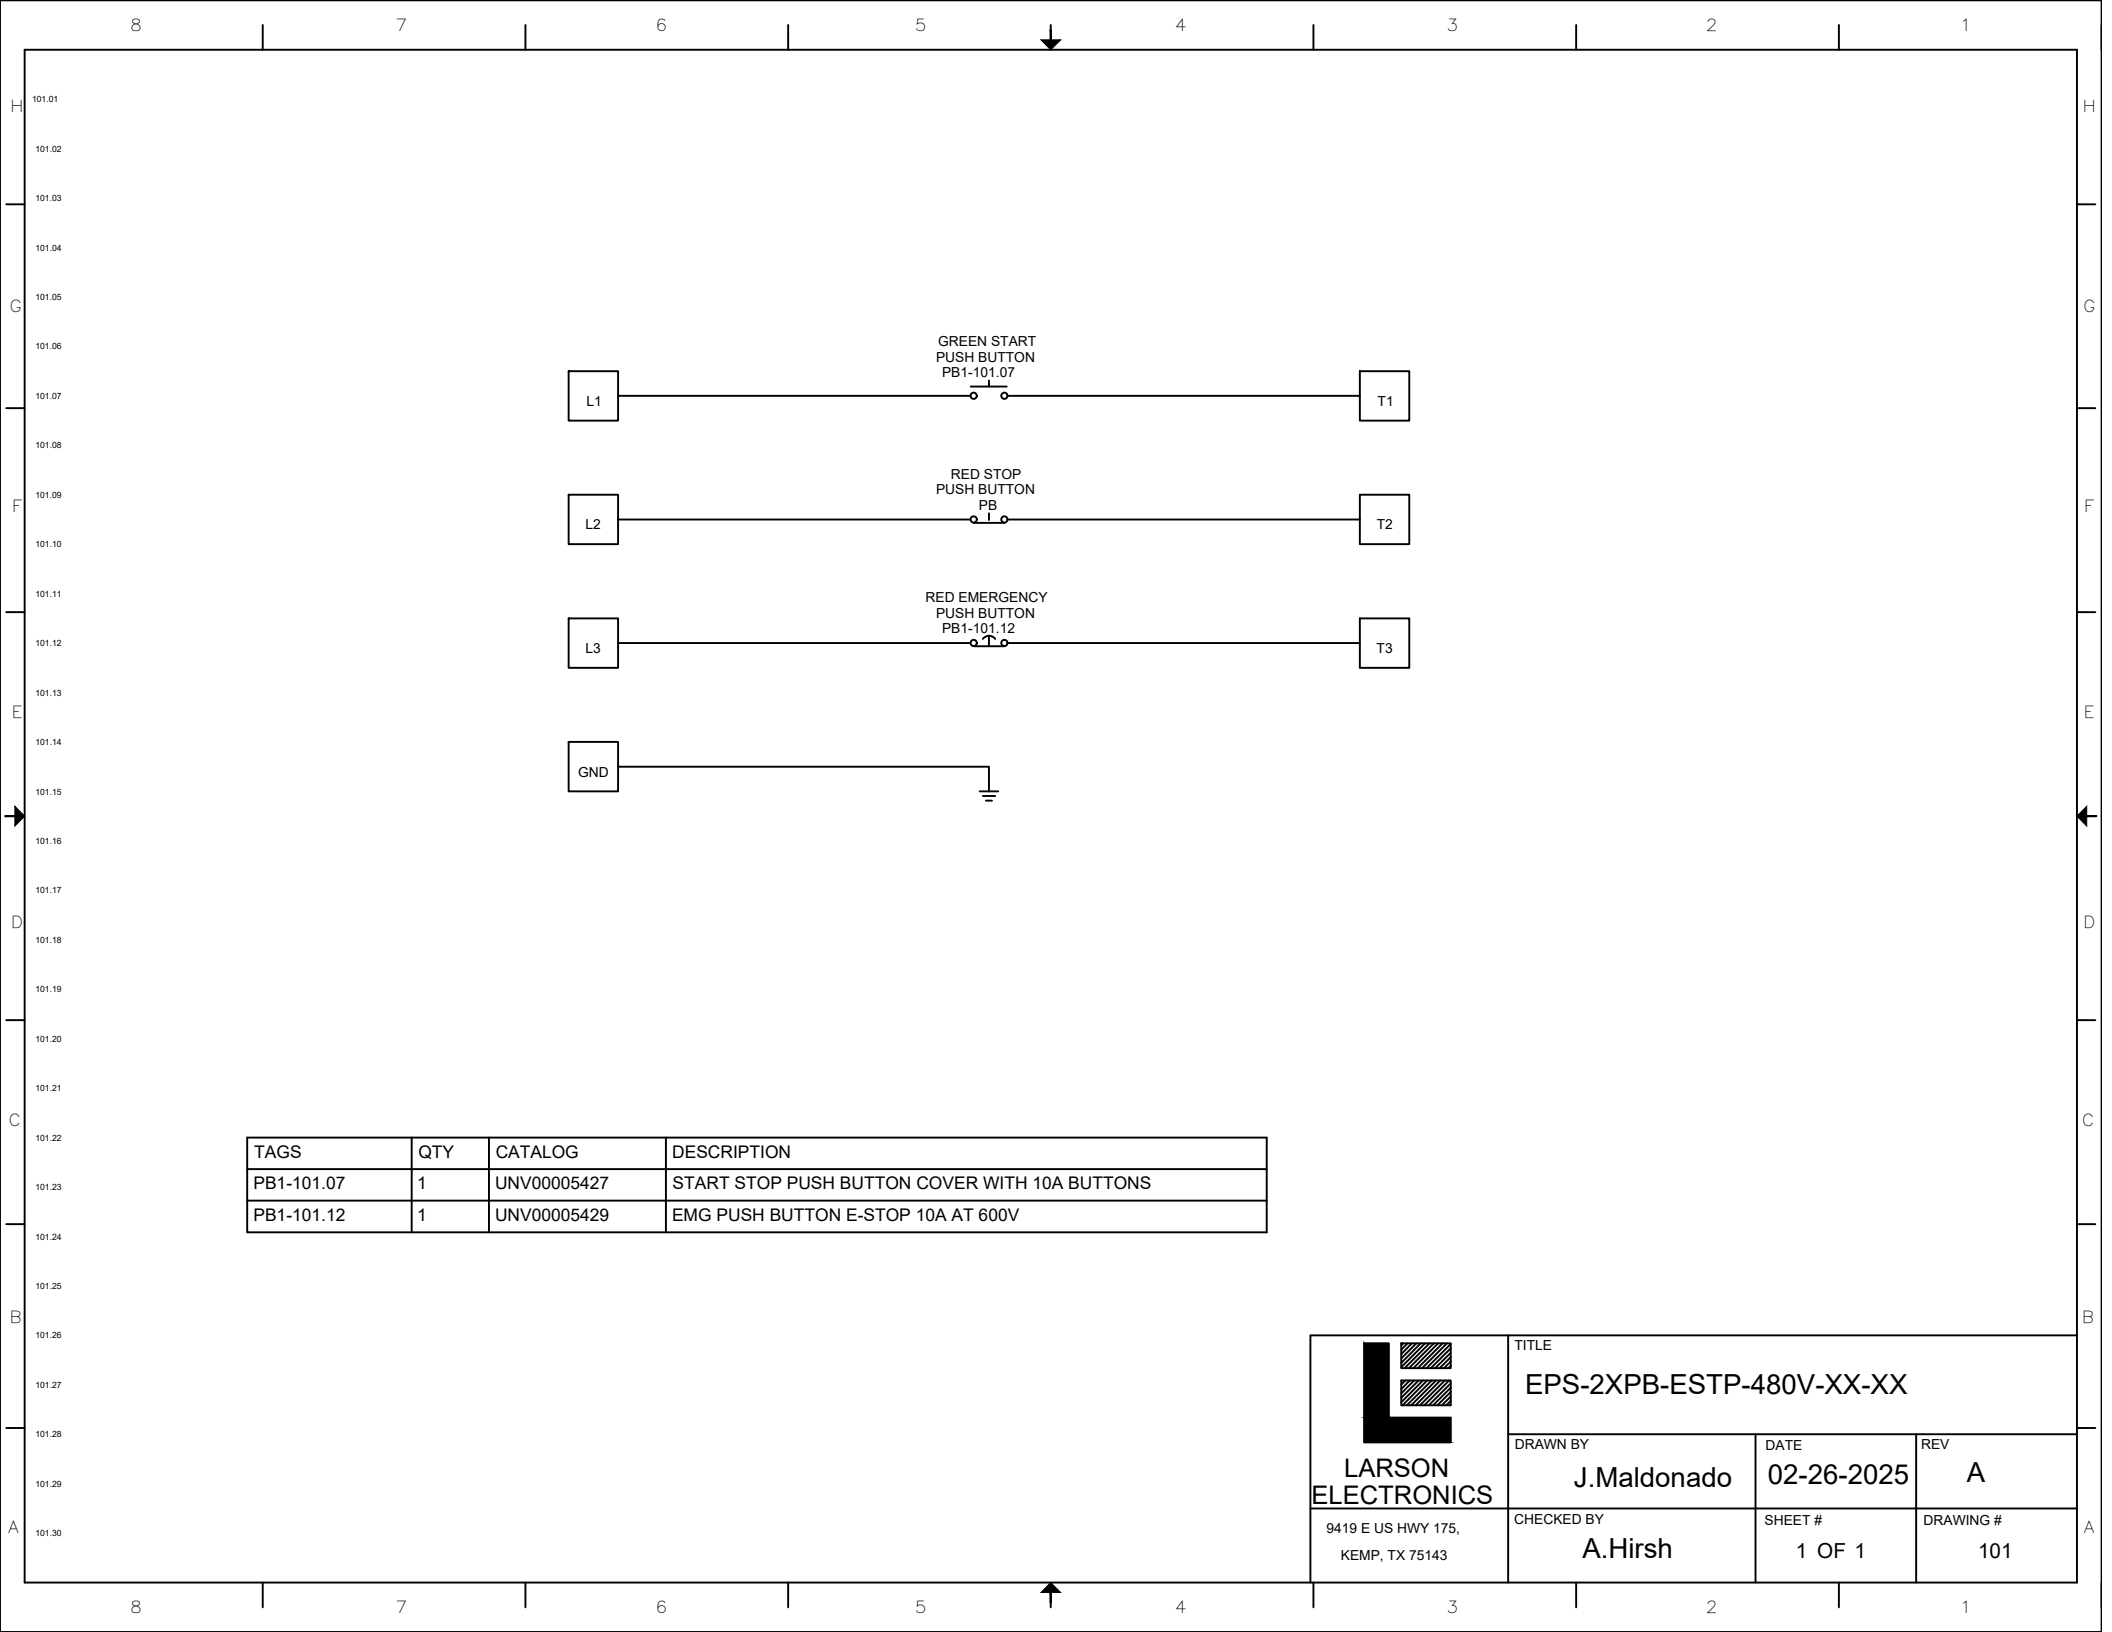

TAGS	QTY	CATALOG	DESCRIPTION
PB1-101.07	1	UNV00005427	START STOP PUSH BUTTON COVER WITH 10A BUTTONS
PB1-101.12	1	UNV00005429	EMG PUSH BUTTON E-STOP 10A AT 600V

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE EPS-2XPB-ESTP-480V-XX-XX		
	DRAWN BY J.Maldonado	DATE 02-26-2025	REV A
	CHECKED BY A.Hirsh	SHEET # 1 OF 1	DRAWING # 101

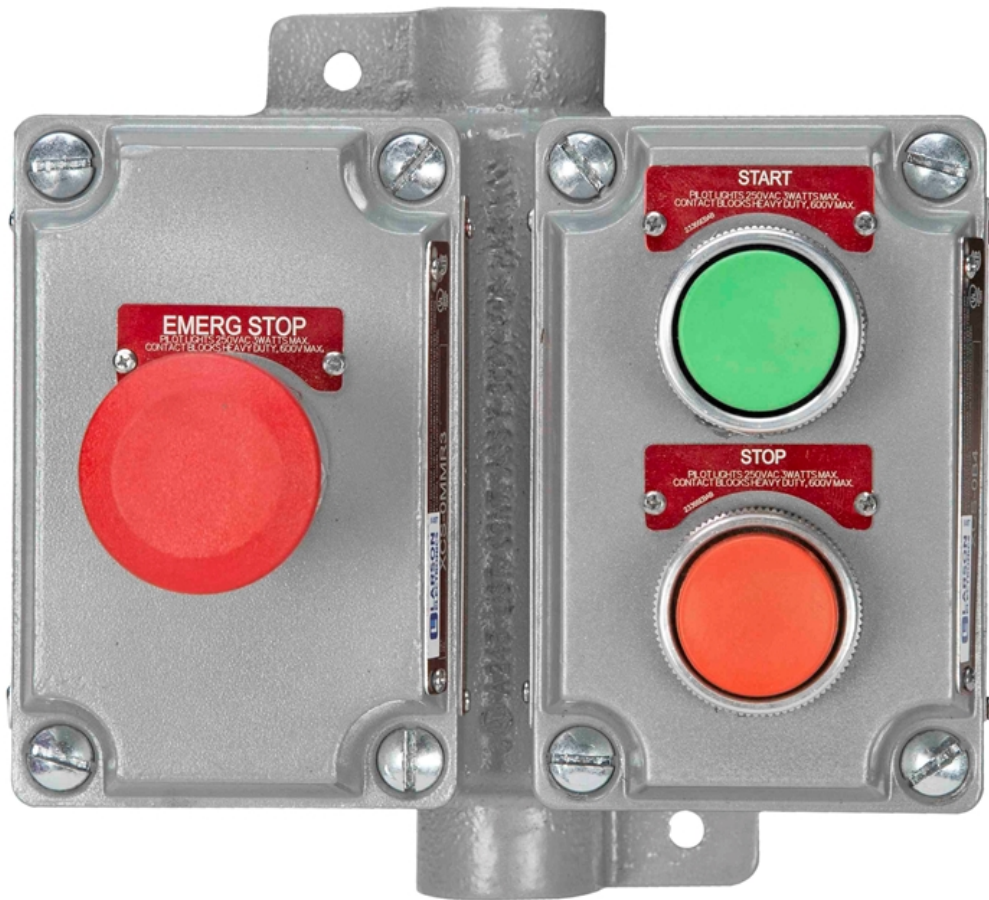






LARSON ELECTRONICS
GAS NO. _____

WARNING: TO REDUCE THE RISK OF IGNITION OF HAZARDOUS ATMOSPHERES, COUPLER BUNG MUST HAVE A SEALING FITTING CONNECTED WITHIN 18 INCHES OF THE ENCLOSURE. ATTENTION: UN SOUÛLEMENT DOIT ÊTRE INSTALLÉ À MOINS DE 450mm DU BOÎTER.

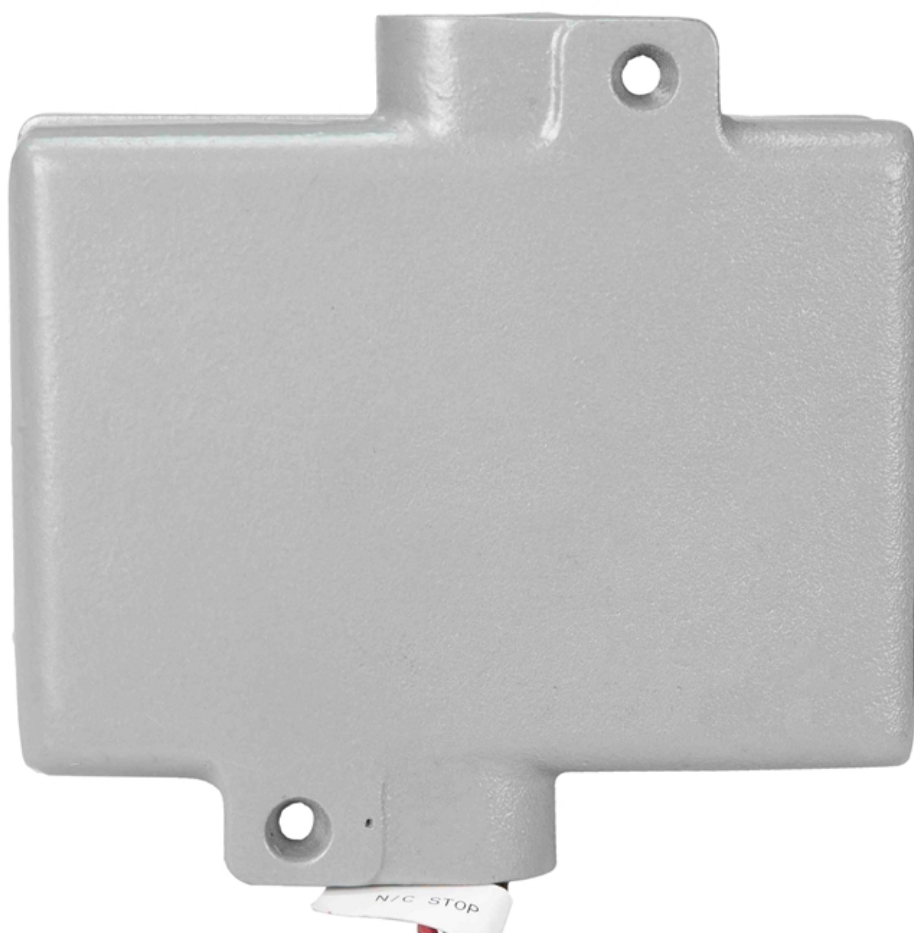

Frequently Asked Questions (FAQ)