Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34L23L09L05N10-M1

200A Rack Mount Power Distribution, 208Y/120V, 3-Phase, (3) CS8369 (3) CS8269 (3) L21-30R (3) L21-20R (3) L6-30R (3) L5-30R (3) L5-20R (3) L15-20R (24) 5-20R GFCI Duplex Outlets, Camlock Line-In/Line-Out, 16U ATA Case, NEMA 3R

Product ID: 315289



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34L23L09L05N10-M1 Rack Mount Power Distribution

Line-In: (1 Set) 400A Single-pole 16-Ser. Male Camlock Receptacles [Green, Black, Red, Blue, White] [600V] w/ Flip Covers
Line-Out: (1 Set) 400A Single-pole 16-Ser. Female Camlock Receptacles [Green, Black, Red, Blue, White] [600V] w/ Flip Covers
Primary Voltage (V): 208Y/120V AC Wye
Primary Phase (PH): 3-Phase (3PH)
Primary Frequency (Hz): 60 Hz (60-cycles)
Primary Panel: 208Y/120V 3PH 200A MLO N3R w/ Power Indicators & Meter
Primary Breakers: (3) 50A 3P MCB [250V]; (3) 50A 1P MCB [250V]; (3) 30A 3P MCB [250V]; (6) 20A 3P MCB [250V]; (3) 30A 2P MCB [250V]; (3) 30A 1P MCB [125V]; (27) 20A 1P MCB [125V]
Primary Outlets: (3) CS8369 Twist-Lock Receptacle [250V]; (3) CS8269 Twist-Lock Receptacle [250V]; (3) L21-30R Twist-Lock Receptacle [120/208V]; (3) L21-20R Twist-Lock Receptacle [120/208V]; (3) L6-30R Twist-Lock Receptacle [250V]; (3) L5-30R Twist-Lock Receptacle [125V]; (3) L5-20R Twist-Lock Receptacle [125V]; (3) L15-20R Twist-Lock Receptacle [250V]; (24) 5-20R NEMA Duplx-GFCI [125V]
Primary Protection: MCB Circuit Breakers; Flip Covers; GFCI's; Power Indicators & Neter
Transformer (KVA): N/A
Secondary Voltage (V): N/A
Secondary Phase (PH): N/A
Secondary Frequency (Hz): N/A
Secondary Panel: N/A
Secondary Breakers: N/A
Secondary Outlets: N/A
Secondary Protection: N/A

Ratings

Max Primary OCP: 200A @ 208V

Max Secondary Output: -

NRTL Listed to UL 508A
NRTL Listed to UL 1640
NRTL Listed to CSA C22.2 No. 14

Special Orders - Special Requirements
Contact us for special requirements

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Form Factor: 31" Rack Mount ATA Case, Shock Mount 16RU ATA Cube w/ (2) Swivel & (2) Locking Casters

Frame Materials: -

Dimensions: 24.75"-W x 38.75"-H x 28"-D

Weight: -

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in Texas

The MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34L23L09L05N10-M1 from Larson Electronics is a Rack Mount Power Distribution that is a portable power solution designed for stages, movie sets, concerts, and entertainment sites. This mobile power distribution unit provides operators the ability to safely tap into and distribute three-phase 208Y/120V AC Wye power from a variety of sources, including generators and direct grid power, found in motion picture production.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Portable Power Distribution Purpose and Use: The MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34L23L09L05N10-M1 portable power distribution system gives operators the ability to power their 208 volt and 120 volt equipment from a single system within live recording and entertainment venues. An accessible LCD monitor at the top of the unit allows highly visible monitoring of power usage and allocation during use. From equipment testing to live recording sets, these portable stations make power at busy production sites readily available and safe to use.

Operation:

• Primary Voltage: 208Y/120V AC Wye 3PH
• Primary Panel: 208Y/120V 3PH 200A MLO N3R w/ Power Indicators & Meter
• Primary Breaker(s): (3) 50A 3P MCB [250V]; (3) 50A 1P MCB [250V]; (3) 30A 3P MCB [250V]; (6) 20A 3P MCB [250V]; (3) 30A 2P MCB [250V]; (3) 30A 1P MCB [125V]; (27) 20A 1P MCB [125V]
• Primary Outlet(s): (3) CS8369 Twist-Lock Receptacle [250V]; (3) CS8269 Twist-Lock Receptacle [250V]; (3) L21-30R Twist-Lock Receptacle [120/208V]; (3) L21-20R Twist-Lock Receptacle [120/208V]; (3) L6-30R Twist-Lock Receptacle [250V]; (3) L5-30R Twist-Lock Receptacle [125V]; (3) L5-20R Twist-Lock Receptacle [125V]; (3) L15-20R Twist-Lock Receptacle [250V]; (24) 5-20R NEMA Duplx-GFCI [125V]
• Transformer: N/A
• Secondary Voltage: N/A
• Secondary Panel: N/A
• Secondary Breaker(s): N/A
• Secondary Outlet(s): N/A

*See specification table at the top of the page for more information about the power distribution system.

On the primary side, operators connect three-phase 208Y/120V AC Wye line-in power using one set of 16 series male camlock inputs with flip covers (green, black, red, blue, white). The primary side contains three CS8369, three CS8269, three L21-30R, three L21-20R, three L6-30R, three L5-30R, three L5-20R, three L15-20R, and twenty-four 5-20R GFCI duplex outlets for equipment. The outlets are protected by flip covers.


One set of 400-amp 600V rated 16 series male camlock receptacles (green, black, red, blue, white) brings three-phase 208Y/120V AC Wye to the primary side of the system. The three-phase 208Y/120V AC Wye main lug only panel on the primary side has three 50A 3P 250V MCB breakers protecting three CS8369 outlets, three 50A 1P 250V MCB breakers protecting three CS8269 outlets, three 30A 3P 250V MCB breakers protecting three L21-30R outlets, three 20A 3P 250V MCB breakers protecting three L21-20R outlets, three 30A 2P 250V MCB breakers protecting three L6-30R outlets, three 30A 1P 125V MCB breakers protecting three L5-30R

outlets, three 20A 3P 250V MCB breakers protecting three L5-20R outlets, three 20A 1P 125V MCB breakers protecting three L15-20R outlets, and twenty-four 20A 1P 125V MCB breakers protecting twenty-four 5-20R GFCI duplex outlets.
Protective Construction: All components are secured inside a 31" rack mount ATA case. This black case features side-located handles for mobility around the production or recording site. Four casters (two swivel and two locking) are available at the bottom of the power distribution unit, which allows operators to move the station easily without lifting. Dual locking casters ensure stable use and safe storage when being transferred in trucks or other large vehicles. This durable case is resistant to shock and takes on a standard design that is similar with professional recording equipment. It can withstand frequent handling around live stages and loading/unloading at outdoor locations.
Certification: All units are built in accordance to NFPA 70 (National Electric Code) and NRTL certified to UL 1640. All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.
Applications: This power distribution system is ideal for indoor or outdoor use and applications including but not limited to, movie sets, entertainment, television sets, stage lighting, studio recording, sporting events, rigging, audio and video production, concerts, and motion picture production. These power distribution systems are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.
Custom Built Systems Available: Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

REV	DESCRIPTION	DATE
A	QUOTE	03/04/2025

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1


LARSON ELECTRONICS®

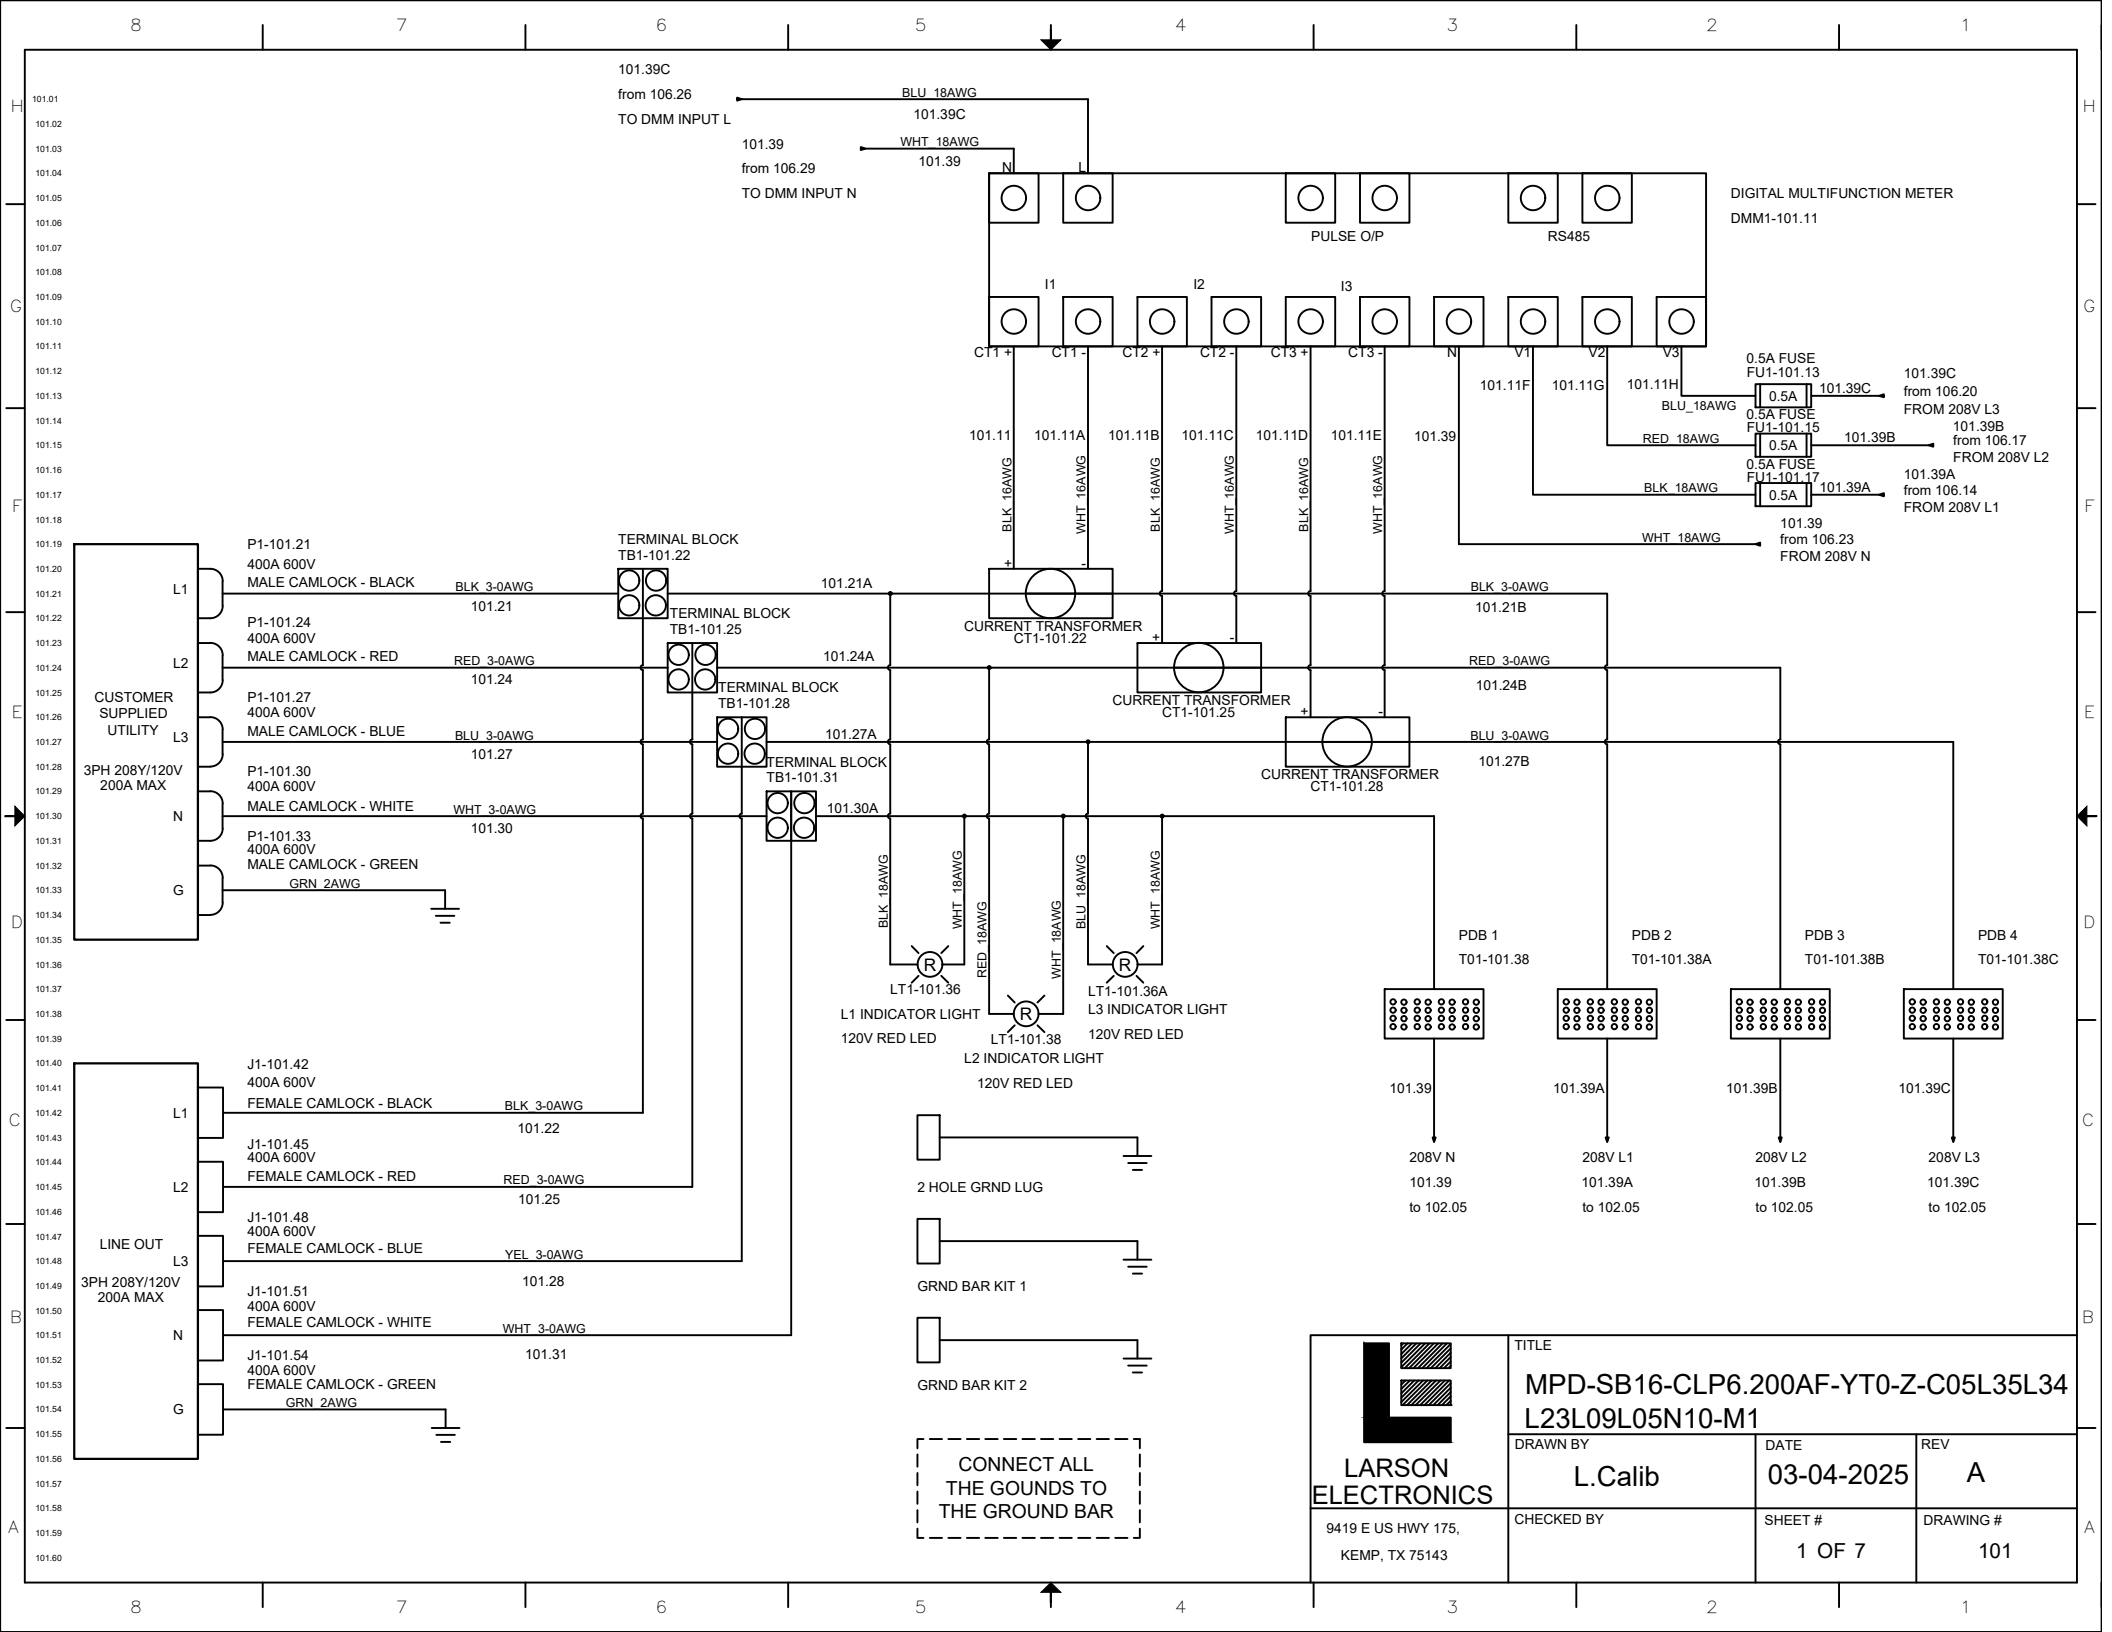


LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	1 OF 7	101

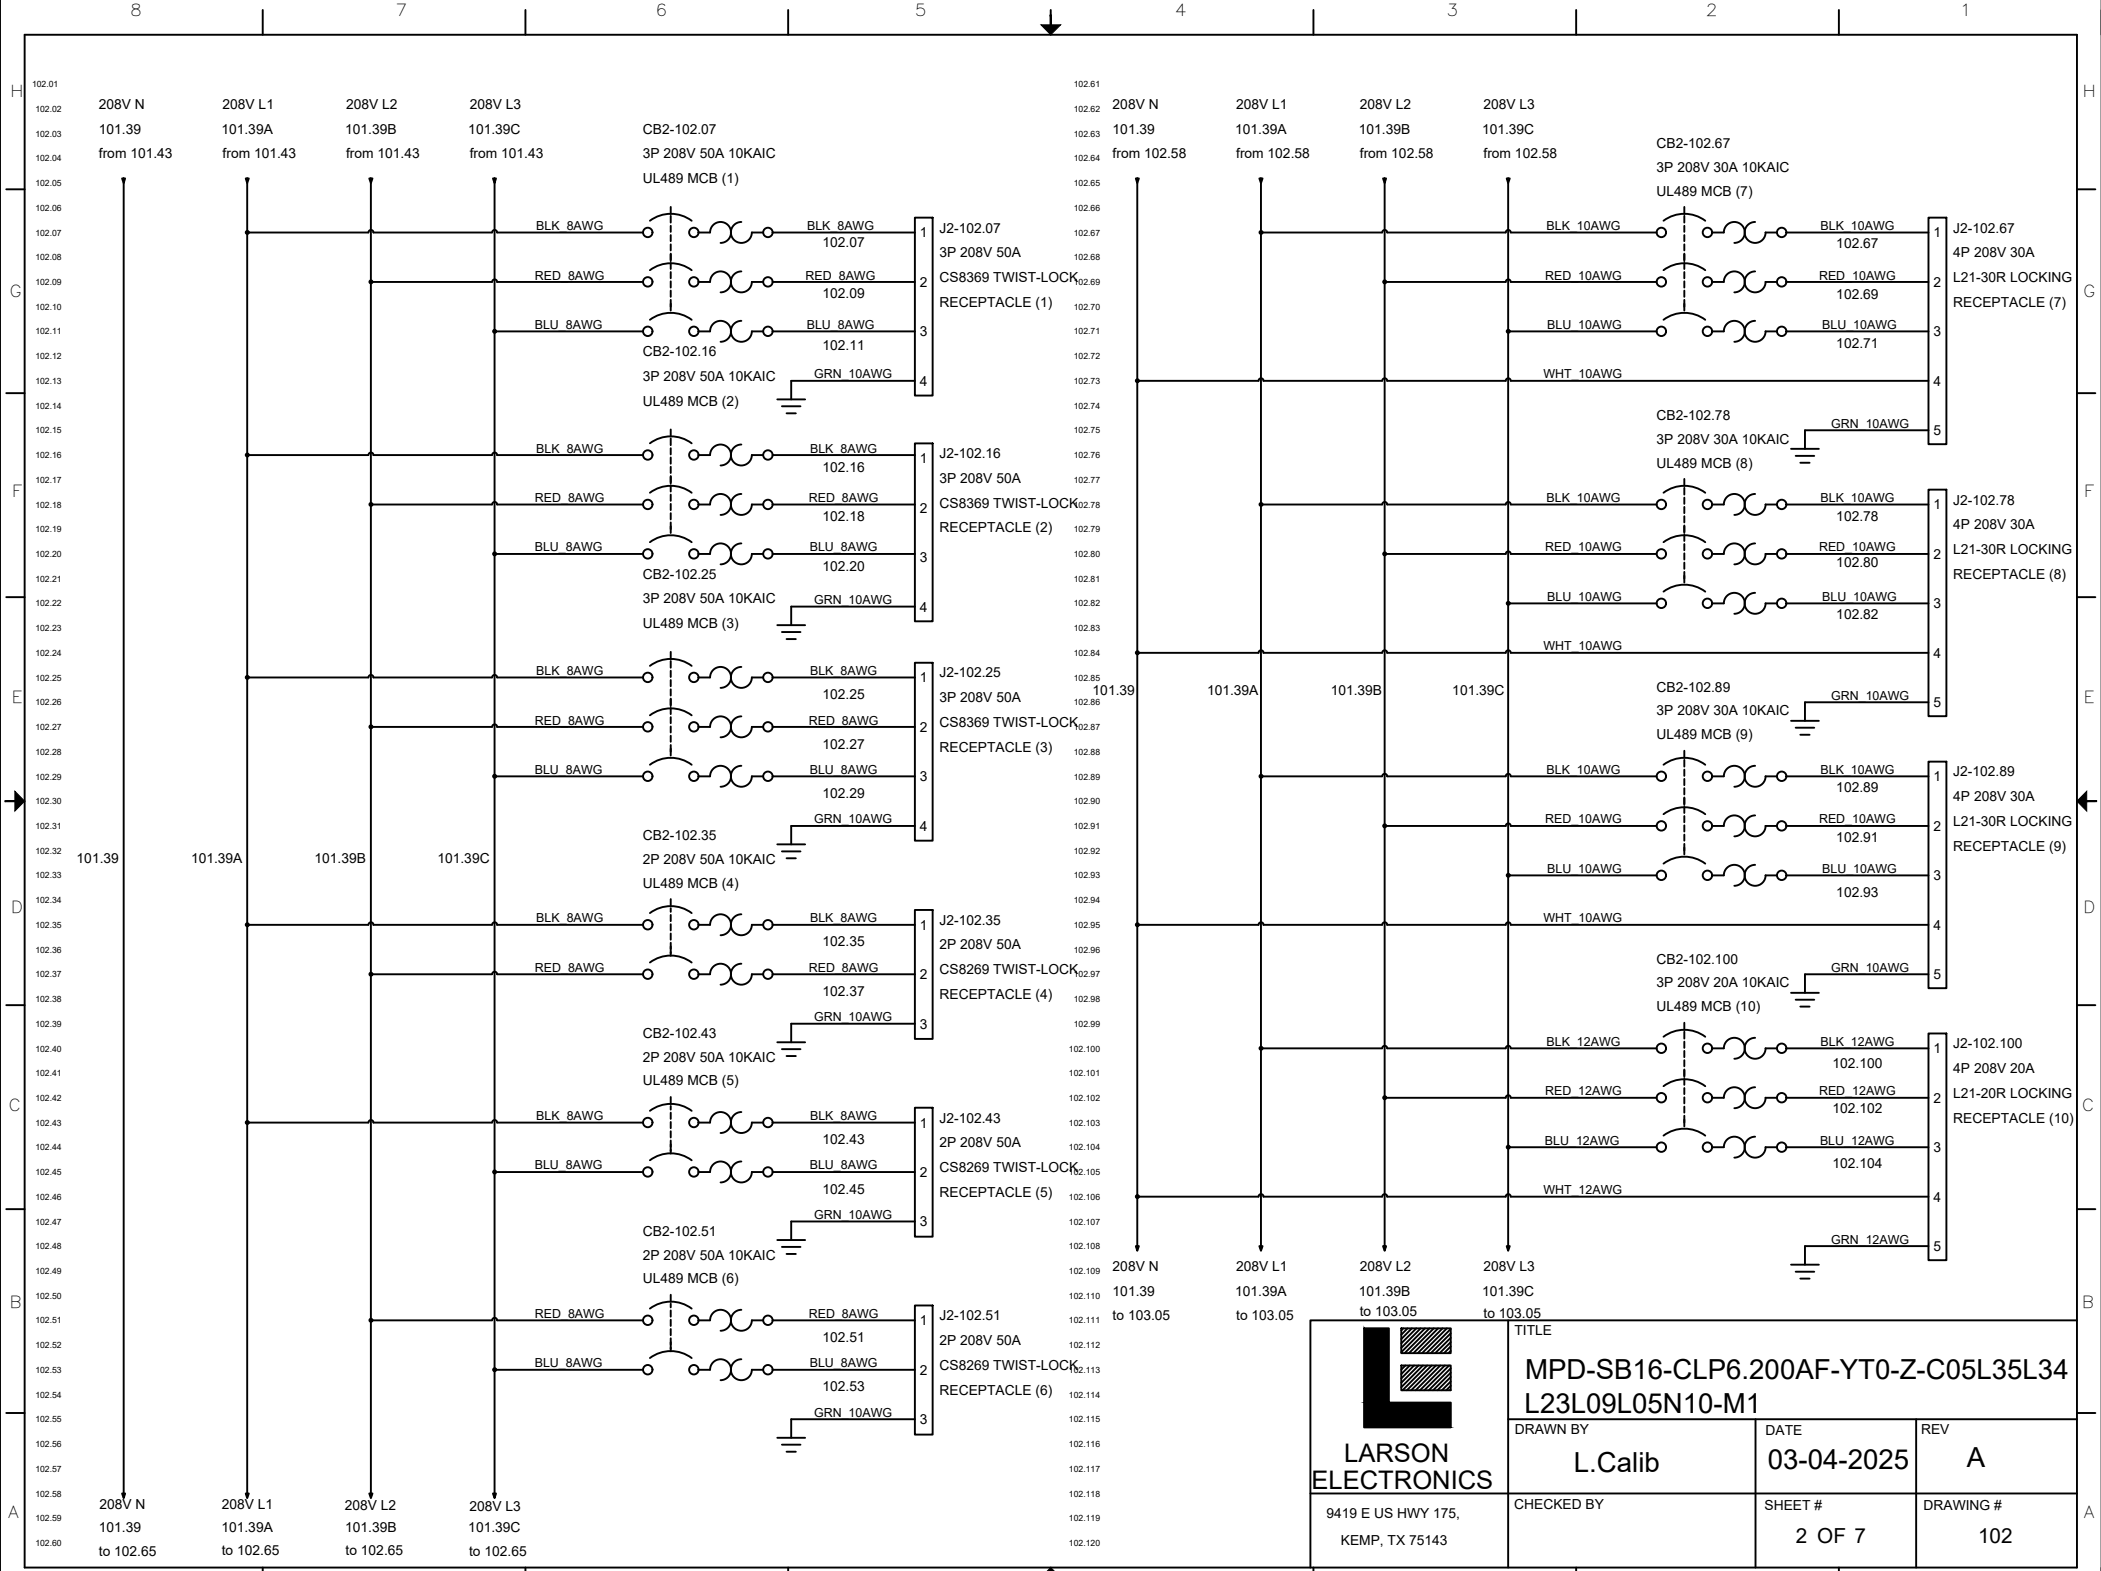
208V N
101.39
from 101.43
208V L1
101.39A
from 101.43
208V L2
101.39B
from 101.43
208V L3
101.39C
from 101.43
CB2-102.07
3P 208V 50A 10KAIC
UL489 MCB (1)
BLK_8AWG
RED_8AWG
BLU_8AWG
GRN_10AWG
BLK_8AWG 102.07
RED_8AWG 102.09
BLU_8AWG 102.11
J2-102.07
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (1)
CB2-102.16
3P 208V 50A 10KAIC
UL489 MCB (2)
BLK_8AWG 102.16
RED_8AWG 102.18
BLU_8AWG 102.20
J2-102.16
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (2)
CB2-102.25
3P 208V 50A 10KAIC
UL489 MCB (3)
BLK_8AWG 102.25
RED_8AWG 102.27
BLU_8AWG 102.29
J2-102.25
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (3)
CB2-102.35
2P 208V 50A 10KAIC
UL489 MCB (4)
BLK_8AWG 102.35
RED_8AWG 102.37
J2-102.35
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (4)
CB2-102.43
2P 208V 50A 10KAIC
UL489 MCB (5)
BLK_8AWG 102.43
BLU_8AWG 102.45
J2-102.43
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (5)
CB2-102.51
2P 208V 50A 10KAIC
UL489 MCB (6)
RED_8AWG 102.51
BLU_8AWG 102.53
J2-102.51
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (6)
208V N
101.39
to 102.65
208V L1
101.39A
to 102.65
208V L2
101.39B
to 102.65
208V L3
101.39C
to 102.65
208V N
101.39
from 102.58
208V L1
101.39A
from 102.58
208V L2
101.39B
from 102.58
208V L3
101.39C
from 102.58
CB2-102.67
3P 208V 30A 10KAIC
UL489 MCB (7)
BLK_10AWG
RED_10AWG
BLU_10AWG
WHT_10AWG
GRN_10AWG
BLK_10AWG 102.67
RED_10AWG 102.69
BLU_10AWG 102.71
J2-102.67
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (7)
CB2-102.78
3P 208V 30A 10KAIC
UL489 MCB (8)
BLK_10AWG 102.78
RED_10AWG 102.80
BLU_10AWG 102.82
J2-102.78
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (8)
CB2-102.89
3P 208V 30A 10KAIC
UL489 MCB (9)
BLK_10AWG 102.89
RED_10AWG 102.91
BLU_10AWG 102.93
J2-102.89
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (9)
CB2-102.100
3P 208V 20A 10KAIC
UL489 MCB (10)
BLK_12AWG
RED_12AWG
BLU_12AWG
WHT_12AWG
GRN_12AWG
BLK_12AWG 102.100
RED_12AWG 102.102
BLU_12AWG 102.104
J2-102.100
4P 208V 20A
L21-20R LOCKING
RECEPTACLE (10)
208V N
101.39
to 103.05
208V L1
101.39A
to 103.05
208V L2
101.39B
to 103.05
208V L3
101.39C
to 103.05
LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143
TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1
DRAWN BY
L.Calib
DATE
03-04-2025
REV
A
CHECKED BY
SHEET #
2 OF 7
DRAWING #
102

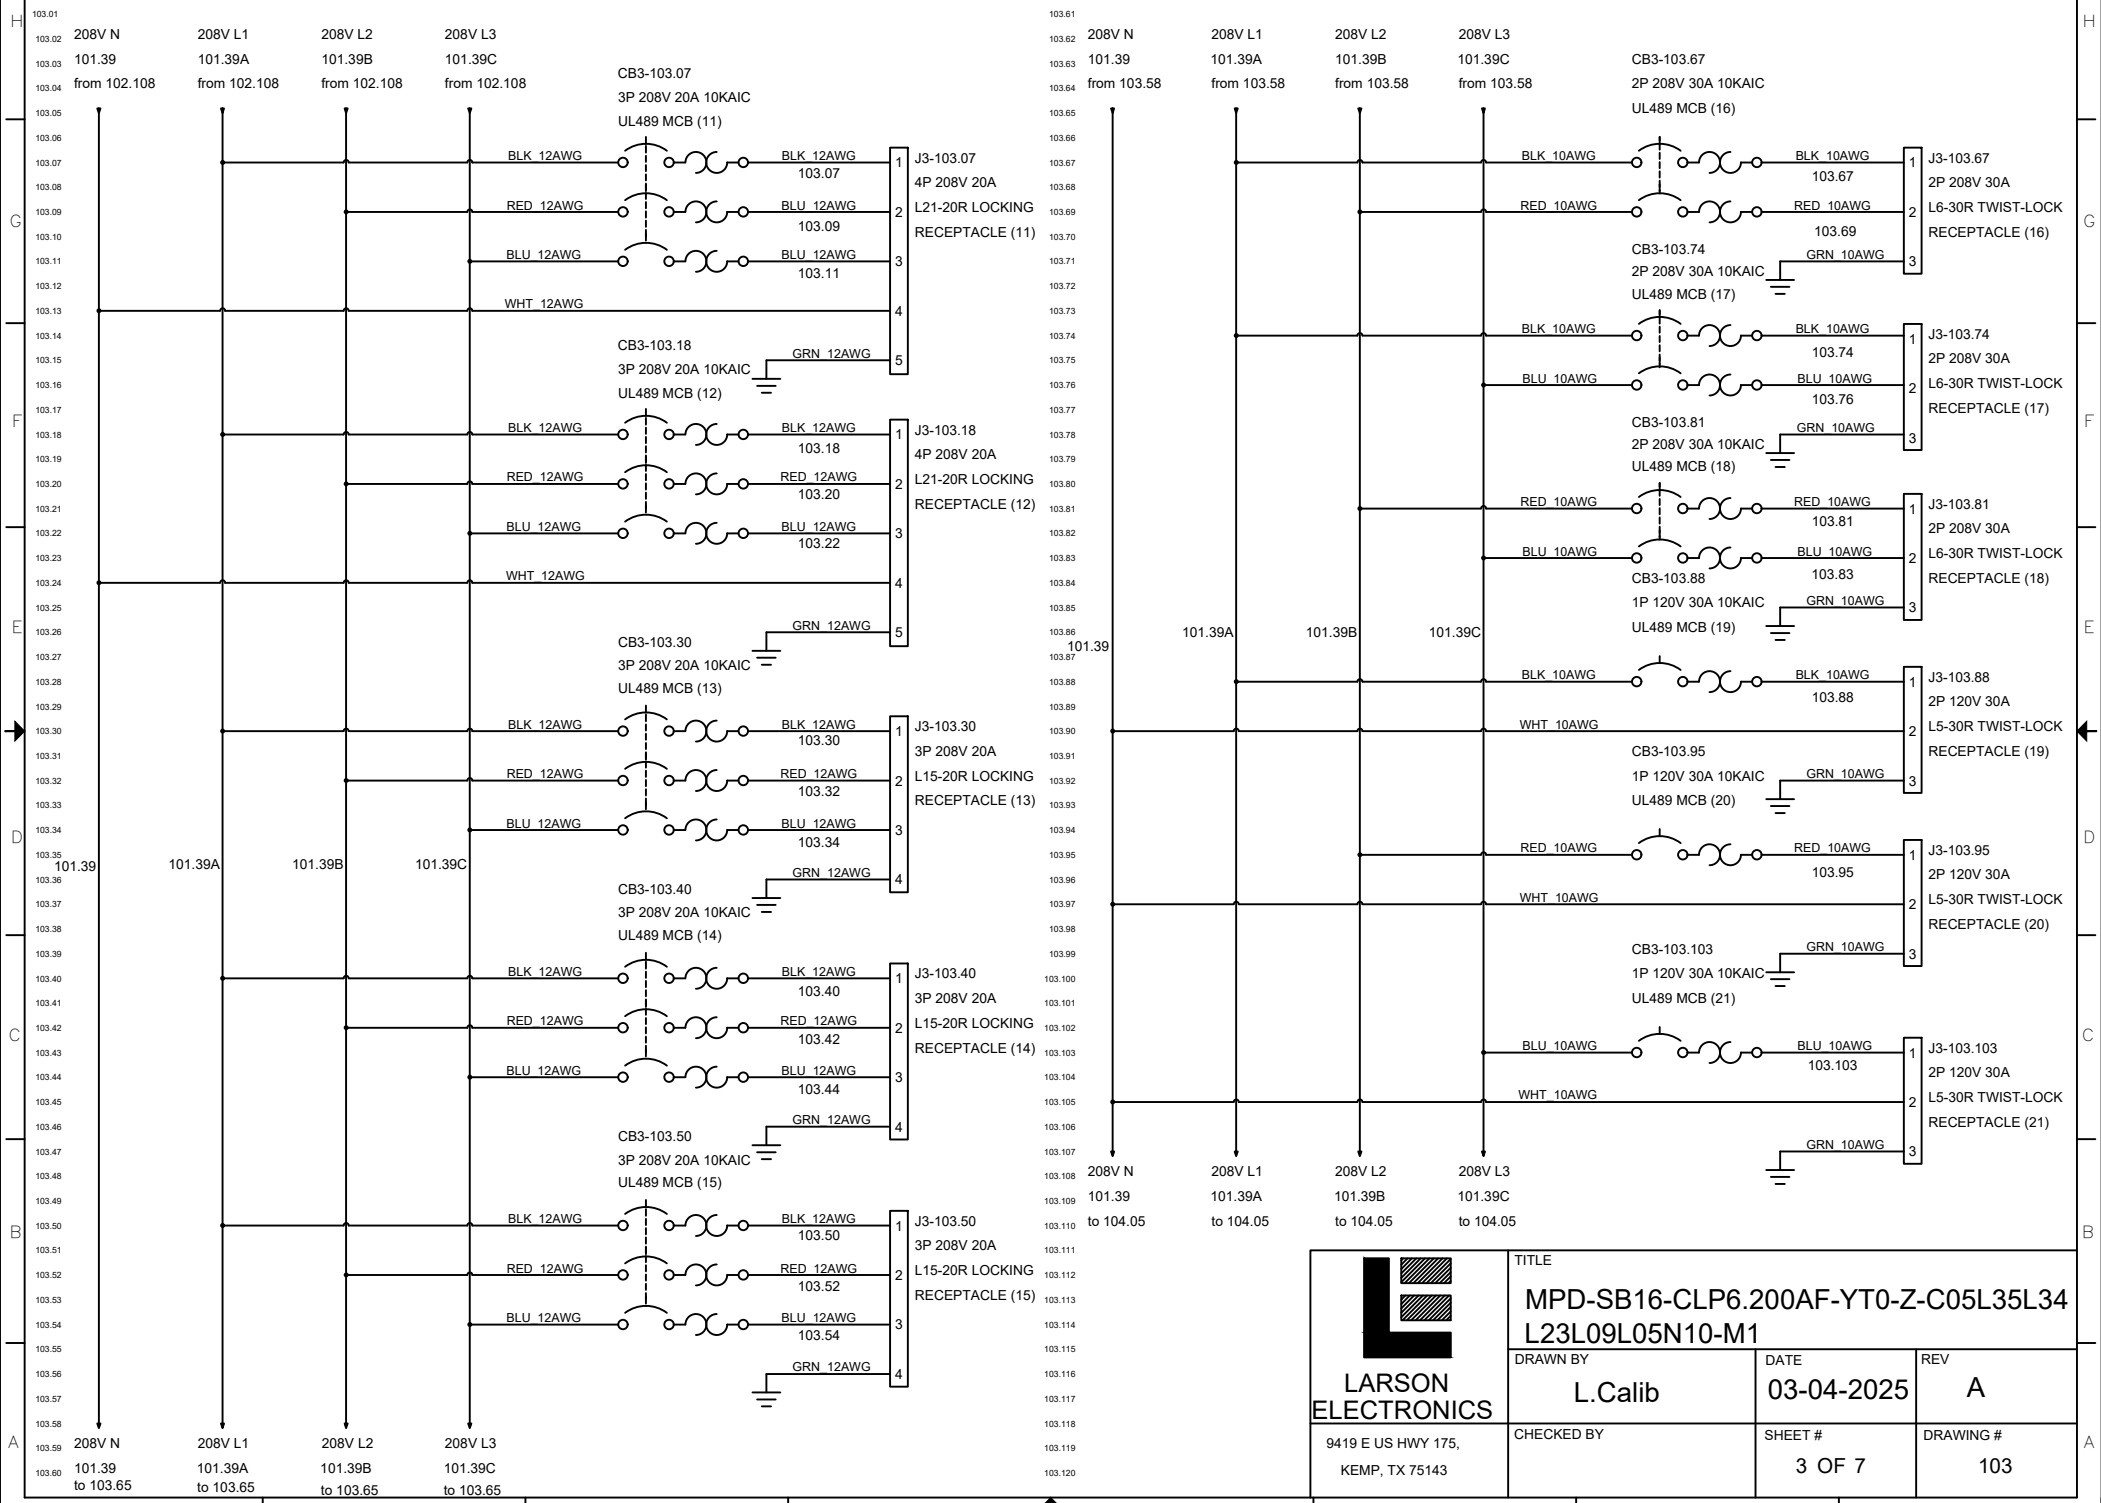


LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1


DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	3 OF 7	103

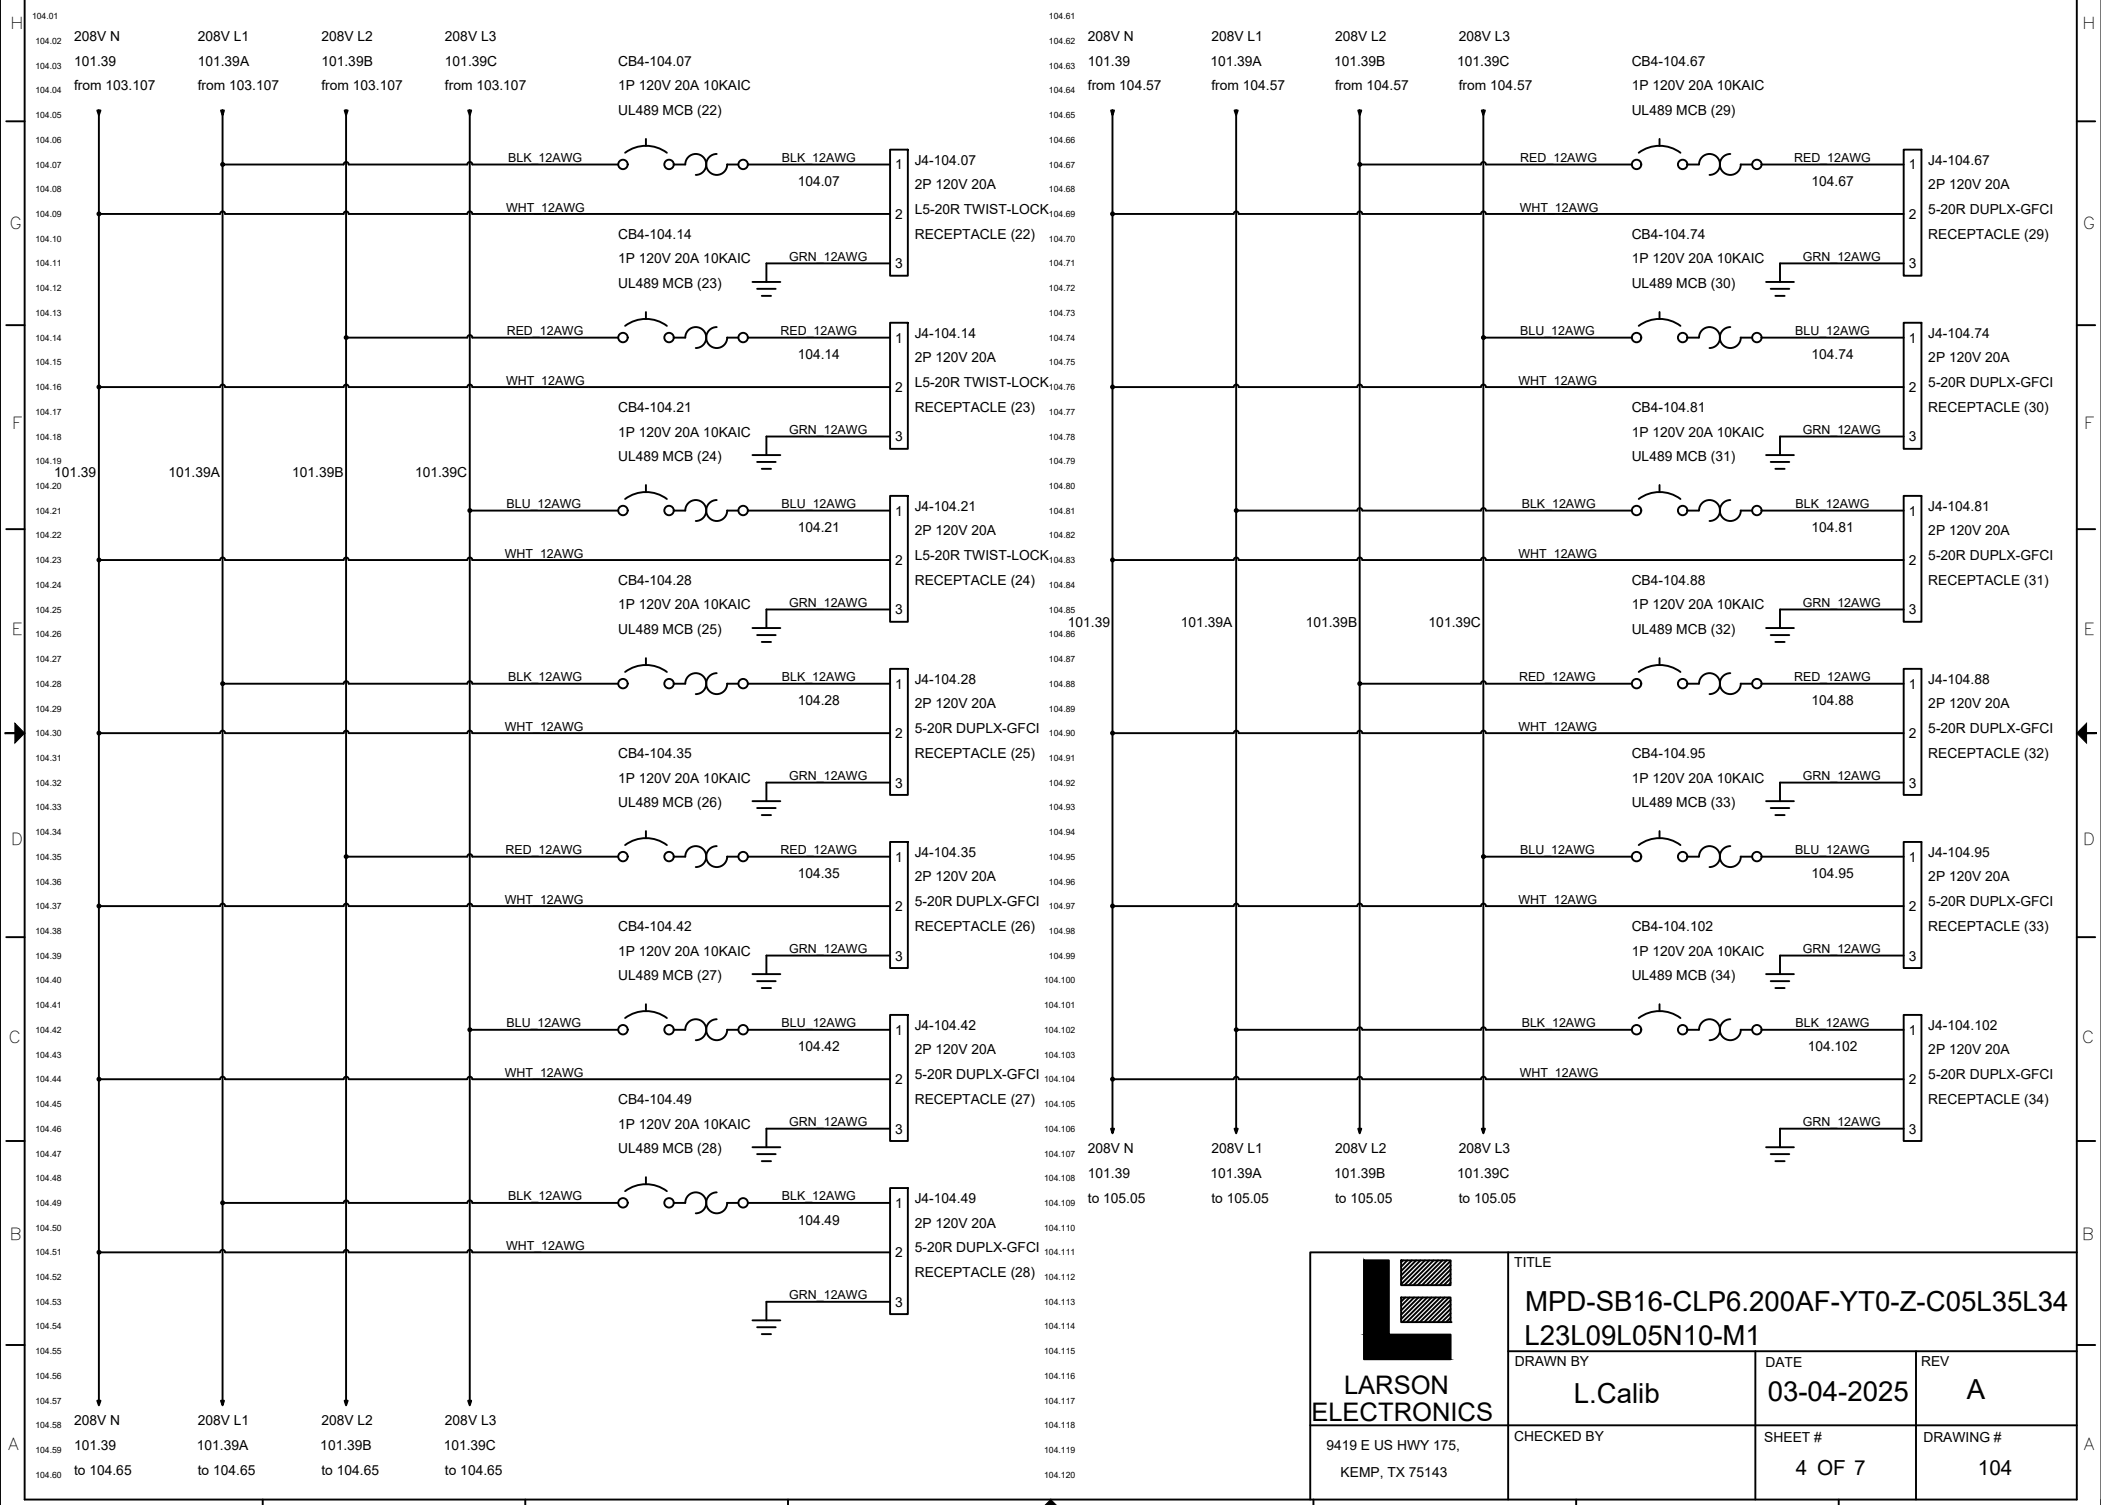

LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE			
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34 L23L09L05N10-M1			
DRAWN BY	L.Calib	DATE	03-04-2025
REV	A		
CHECKED BY		SHEET #	4 OF 7
DRAWING #	104		

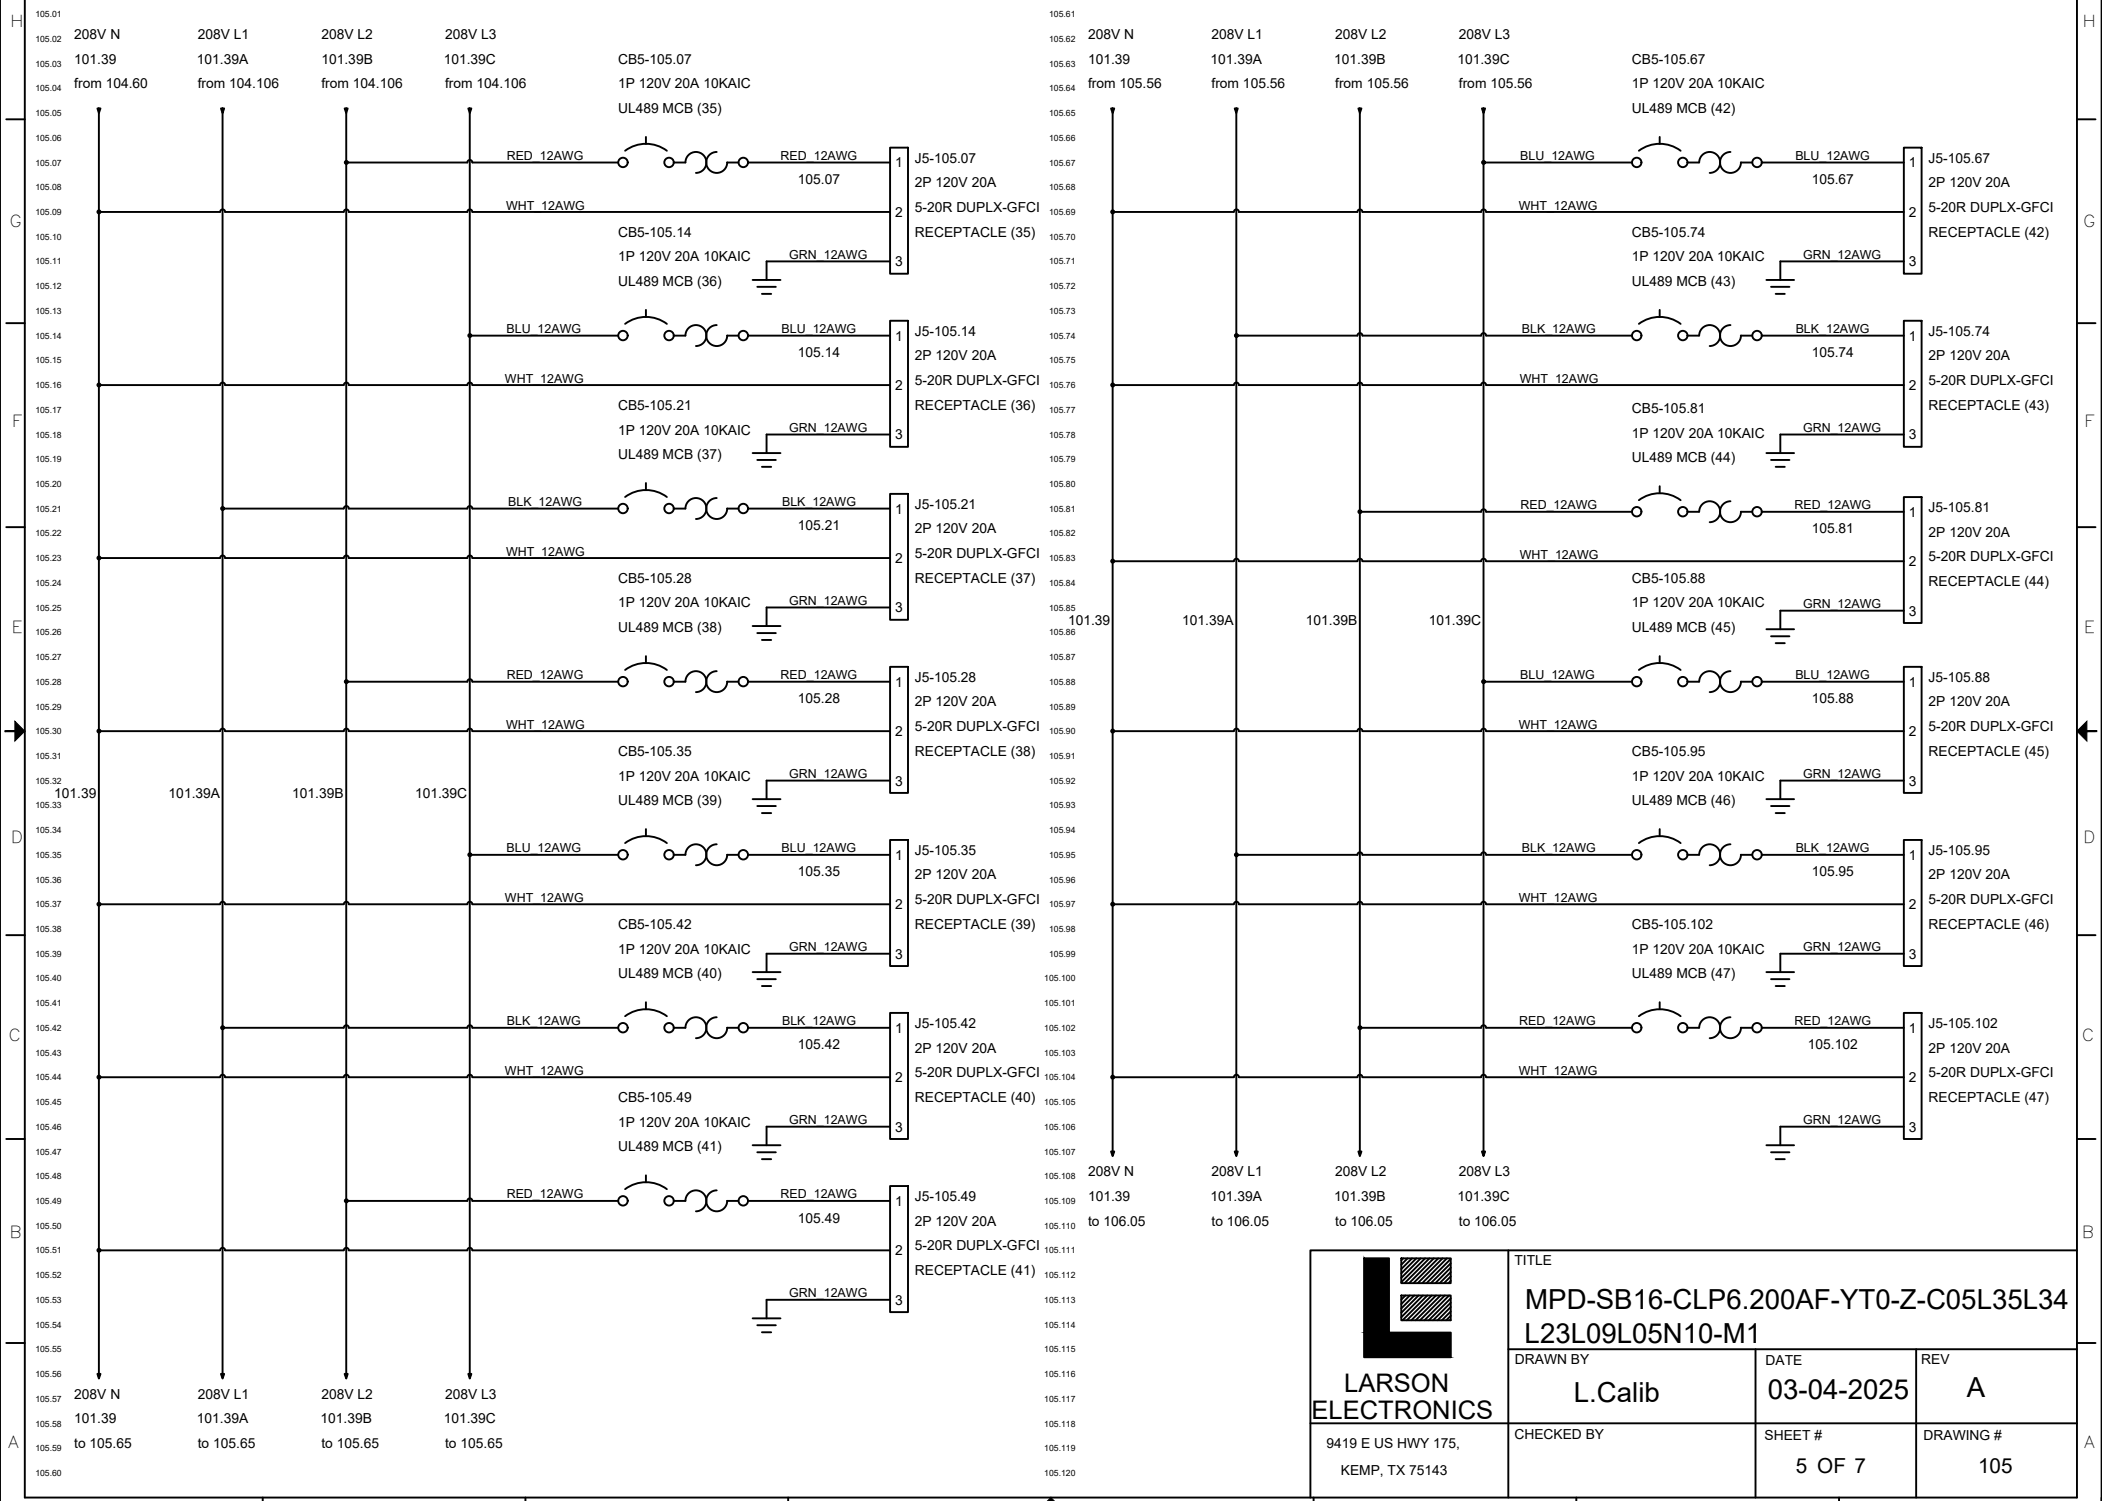


LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34 L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	5 OF 7	105

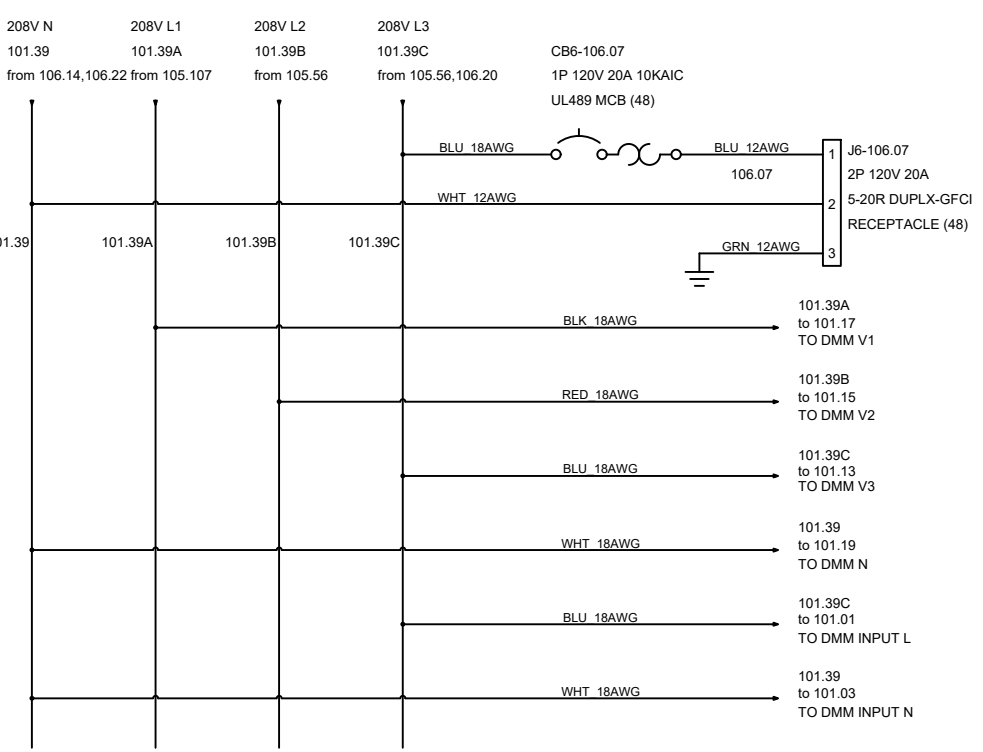

TAGS	QTY	CATALOG	DESCRIPTION
J3-103.103 J3-103.88 J3-103.95	3	UNV00008907	L5-30R 125V 30A LOCK RING RECEPTACLE
J2-102.67 J2-102.78 J2-102.89	3	UNV00007119	3P 5W 120/208V 30A L21-30R LOCKING RECEPTACLE
2 HOLE GRND LUG	1	UNV00007136	2 HOLE GROUND LUG
P1-101.30	1	UNV00002290	600V 400A MALE CAM LOCK WHITE
P1-101.21	1	UNV00008711	600V 400A MALE CAM LOCK BLACK
P1-101.33	1	UNV00008712	600V 400A CAM LOCK GREEN
P1-101.24	1	UNV00008715	600V 400A MALE CAM LOCK RED
P1-101.27	1	UNV00008710	600V 400A MALE CAM LOCK BLUE
J4-104.07 J4-104.14 J4-104.21	3	UNV00005543	1P 120V 20A L5-20R LOCKING RECEPTACLE
J2-102.35 J2-102.43 J2-102.51	3	UNV00008819	CS8269 2P 50A 250V LOCK RECEPTACLE
J2-102.07 J2-102.16 J2-102.25	3	UNV00012061	CS8269 RECEPTACLE 3P 50AMPS 250V 3PIN 4 WIRE
J2-102.100 J3-103.07 J3-103.18	3	UNV00013866	208Y/120V 20A L21-20R TWIST-LOCK

TAGS	QTY	CATALOG	DESCRIPTION
J3-103.67 J3-103.74 J3-103.81	3	UNV00007127	L6-30R TURN LOCK 250V 30 AMP RECEPTACLE
J4-104.102 J4-104.28 J4-104.35 J4-104.42 J4-104.49 J4-104.67 J4-104.74 J4-104.81 J4-104.88 J4-104.95 J5-105.07 J5-105.102 J5-105.14 J5-105.21 J5-105.28 J5-105.35 J5-105.42 J5-105.49 J5-105.67 J5-105.74 J5-105.81 J5-105.88 J5-105.95 J6-106.07	24	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
J1-101.45	1	UNV00013755	600V UPTO 400A #2-4/0 AWG RED FEMALE CAM LOCK RCPT.
J1-101.48	1	UNV00013756	600V UPTO 400A #2-4/0 AWG BLU FEMALE CAM LOCK RCPT.
J1-101.54	1	UNV00013758	600V UPTO 400A #2-4/0 AWG GRN FEMALE CAM LOCK RCPT.
J1-101.51	1	UNV00013752	600V UPTO 400A #2-4/0 AWG WHT FEMALE CAM LOCK RCPT.
J1-101.42	1	UNV00013753	600V UPTO 400A #2-4/0 AWG BLK FEMALE CAM LOCK RCPT.
J3-103.30 J3-103.40 J3-103.50	3	UNV00013592	3P 240V 20A L15-20R LOCING RECEPTACLE
CB3-103.103 CB3-103.88 CB3-103.95	3	UNV00015146	1-P 30 AMP 120/240 V DIN RAIL MOUNT BREAKER
CB2-102.35 CB2-102.43 CB2-102.51	3	UNV00014731	2P 250V 50A DIN RAIL MOUNT MCCB UL489
CB2-102.67 CB2-102.78 CB2-102.89	3	UNV00015171	3P 30A 240V UL489 DIN RAIL MOUNT CIRCUIT BREAKER
CB2-102.07 CB2-102.16 CB2-102.25	3	UNV00015175	250V 50A 3P UL489 MINIATURE CIRCUIT BREAKER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	6 OF 7	106

TAGS	QTY	CATALOG	DESCRIPTION
CB4-104.07 CB4-104.102 CB4-104.14 CB4-104.21 CB4-104.28 CB4-104.35 CB4-104.42 CB4-104.49 CB4-104.67 CB4-104.74 CB4-104.81 CB4-104.88 CB4-104.95 CB5-105.07 CB5-105.102 CB5-105.14 CB5-105.21 CB5-105.28 CB5-105.35 CB5-105.42 CB5-105.49 CB5-105.67 CB5-105.74 CB5-105.81 CB5-105.88 CB5-105.95 CB6-106.07	27	UNV00017491	1P 125V 20A 10KA UL489 DIN RAIL MOUNT BREAKER
CB3-103.67 CB3-103.74 CB3-103.81	3	UNV00017628	2P 240V 30A UL489 CIRCUIT BREAKER
CB2-102.100 CB3-103.07 CB3-103.18 CB3-103.30 CB3-103.40 CB3-103.50	6	UNV00015169	3P 20A 480/240V UL489 CIRCUIT BREAKER
CT1-101.22 CT1-101.25 CT1-101.28	3	UNV00016463	AC Transformer, Solid Core, 200A to 5A, 1.56" sensing window
DMM1-101.11	1	UNV00016483	POWER METER, 1&3-PH, POSITIVE LCD, 100-240V
FU1-101.13 FU1-101.15 FU1-101.17	3	UNV00016473	0.5 Amp 250V Glass Fuse
LT1-101.36 LT1-101.36A LT1-101.38	3	UNV00015469	125V RED INDICATOR LIGHT 1.5MA
TB1-101.22 TB1-101.25 TB1-101.28 TB1-101.31	4	UNV00016551	620A 4 HOLE TERNINAL BLOCK
T01-101.38 T01-101.38A T01-101.38B T01-101.38C	4	UNV00014768	22 HOLE 10IN BUS BAR
GRND BAR KIT 1 GRND BAR KIT 2	2	UNV00013942C	GROUND BAR KIT

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143


TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	7 OF 7	107

REV	DESCRIPTION	DATE
A	QUOTE	03/04/2025

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1


LARSON ELECTRONICS®

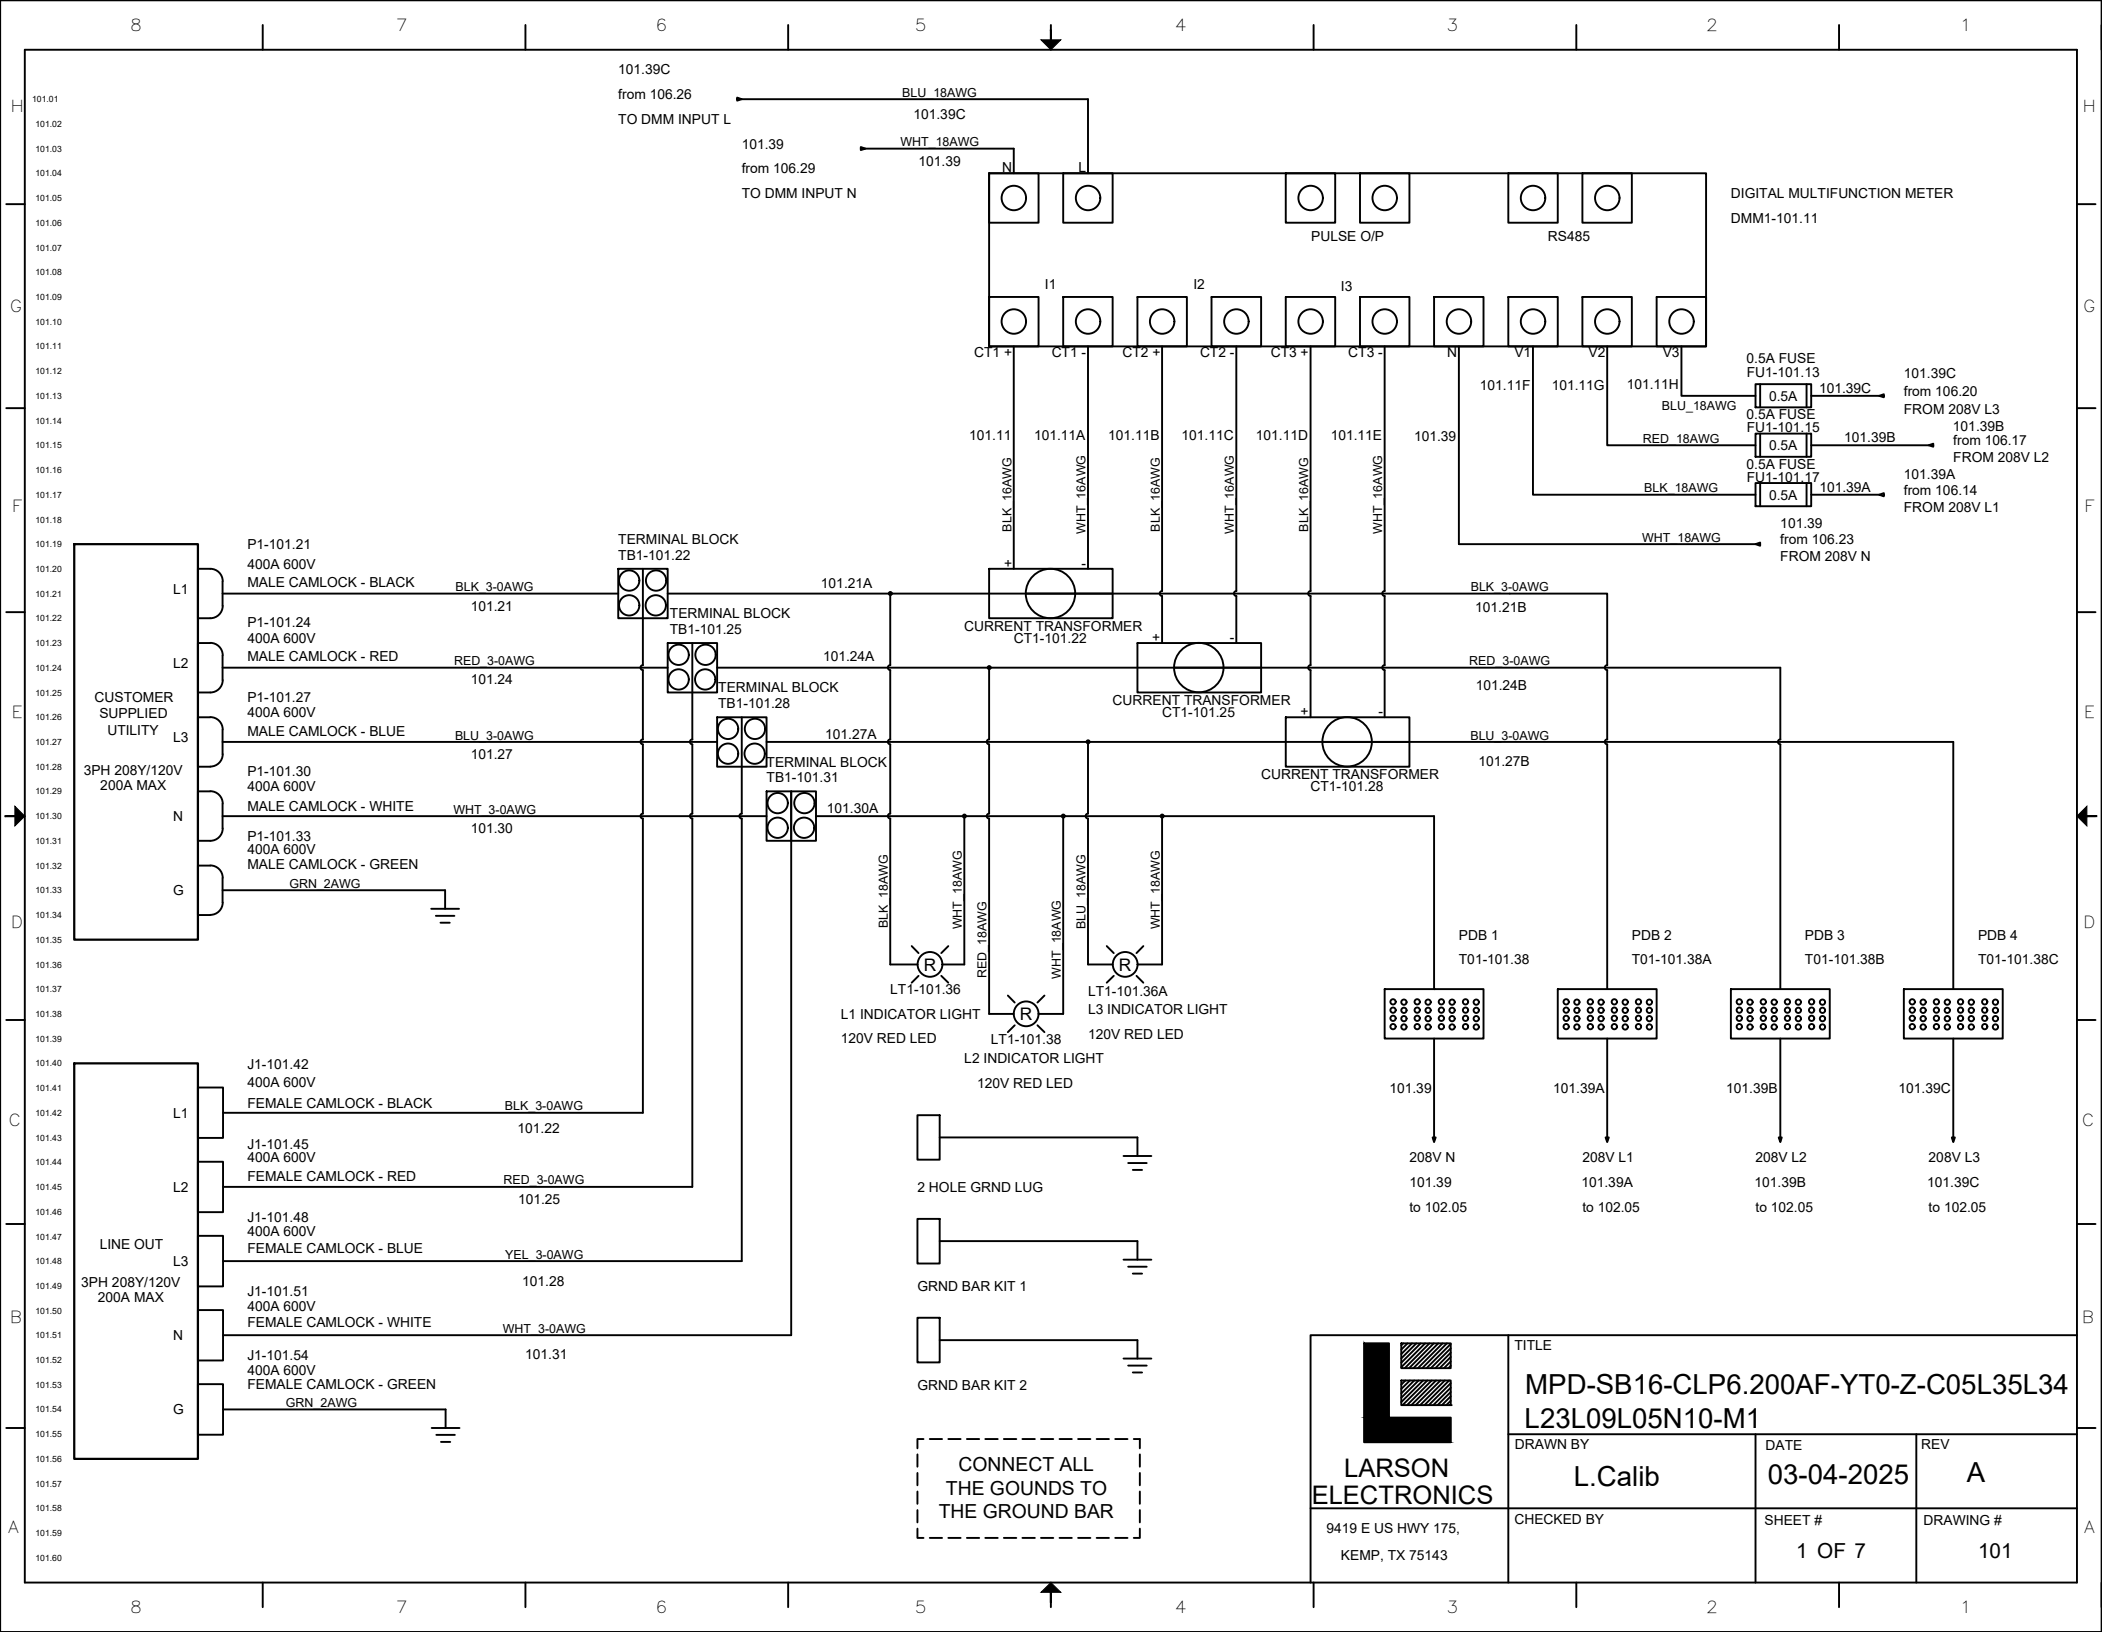


LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	1 OF 7	101

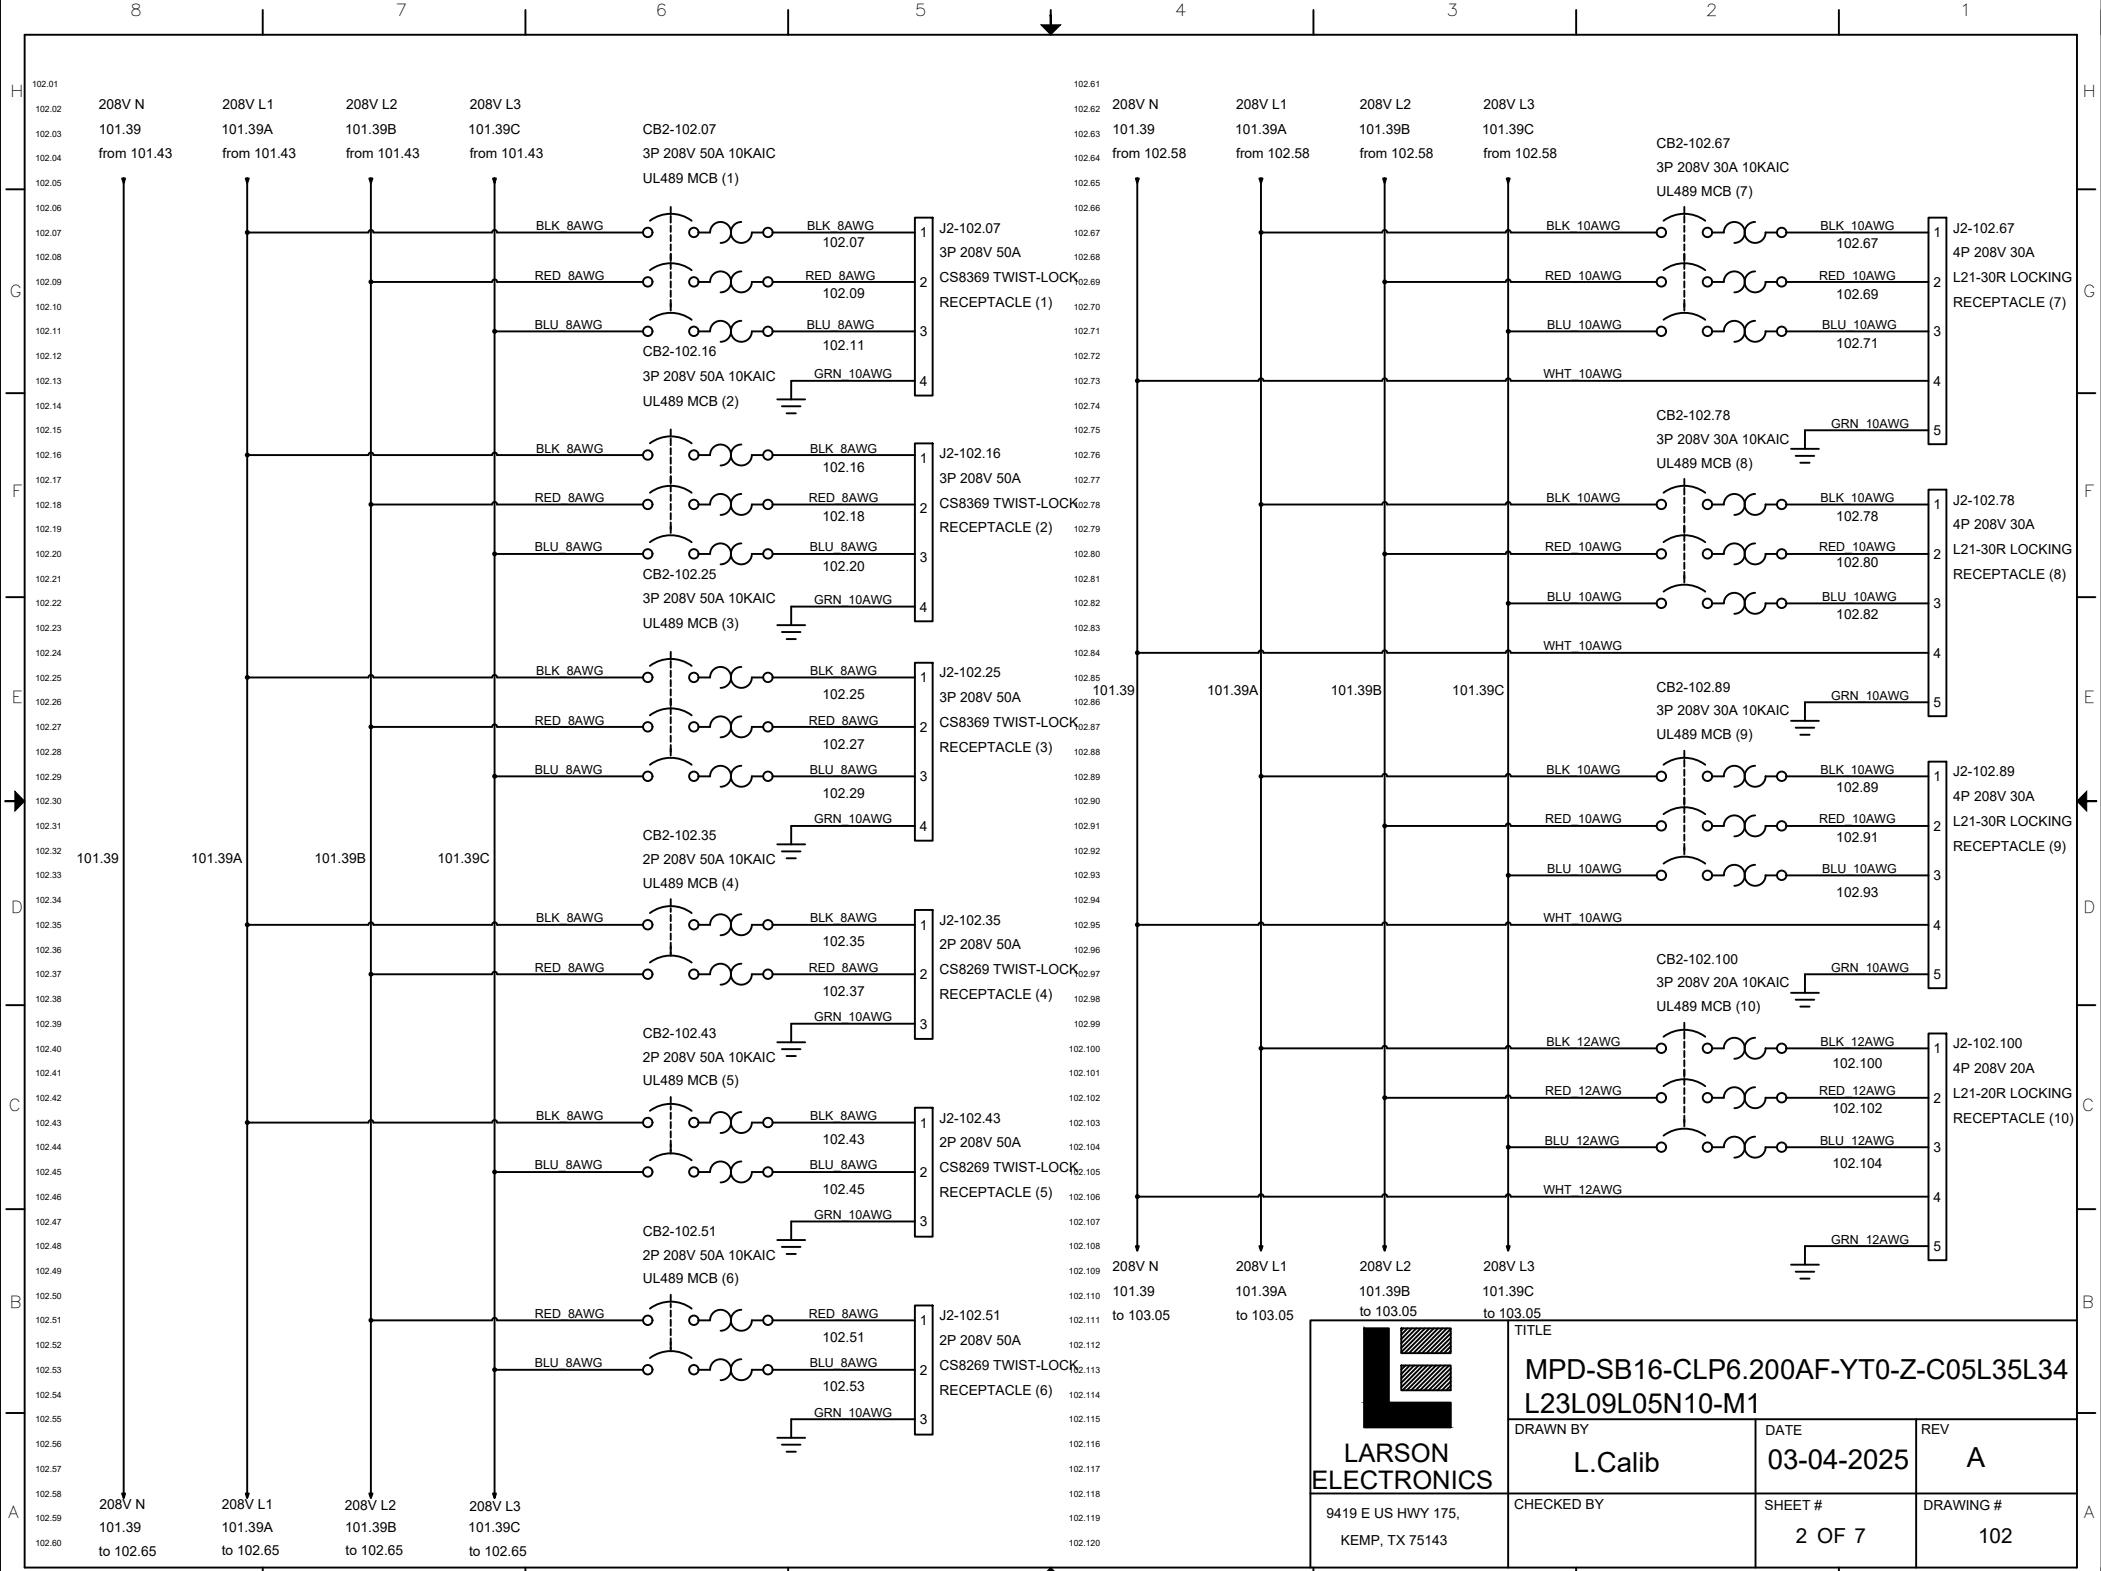
208V N
101.39
from 101.43
208V L1
101.39A
from 101.43
208V L2
101.39B
from 101.43
208V L3
101.39C
from 101.43
CB2-102.07
3P 208V 50A 10KAIC
UL489 MCB (1)
BLK_8AWG
RED_8AWG
BLU_8AWG
GRN_10AWG
BLK_8AWG 102.07
RED_8AWG 102.09
BLU_8AWG 102.11
J2-102.07
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (1)
CB2-102.16
3P 208V 50A 10KAIC
UL489 MCB (2)
BLK_8AWG 102.16
RED_8AWG 102.18
BLU_8AWG 102.20
J2-102.16
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (2)
CB2-102.25
3P 208V 50A 10KAIC
UL489 MCB (3)
BLK_8AWG 102.25
RED_8AWG 102.27
BLU_8AWG 102.29
J2-102.25
3P 208V 50A
CS8369 TWIST-LOCK
RECEPTACLE (3)
CB2-102.35
2P 208V 50A 10KAIC
UL489 MCB (4)
BLK_8AWG 102.35
RED_8AWG 102.37
J2-102.35
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (4)
CB2-102.43
2P 208V 50A 10KAIC
UL489 MCB (5)
BLK_8AWG 102.43
BLU_8AWG 102.45
J2-102.43
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (5)
CB2-102.51
2P 208V 50A 10KAIC
UL489 MCB (6)
RED_8AWG 102.51
BLU_8AWG 102.53
J2-102.51
2P 208V 50A
CS8269 TWIST-LOCK
RECEPTACLE (6)
208V N
101.39
to 102.65
208V L1
101.39A
to 102.65
208V L2
101.39B
to 102.65
208V L3
101.39C
to 102.65
208V N
101.39
from 102.58
208V L1
101.39A
from 102.58
208V L2
101.39B
from 102.58
208V L3
101.39C
from 102.58
CB2-102.67
3P 208V 30A 10KAIC
UL489 MCB (7)
BLK_10AWG
RED_10AWG
BLU_10AWG
WHT_10AWG
GRN_10AWG
BLK_10AWG 102.67
RED_10AWG 102.69
BLU_10AWG 102.71
J2-102.67
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (7)
CB2-102.78
3P 208V 30A 10KAIC
UL489 MCB (8)
BLK_10AWG 102.78
RED_10AWG 102.80
BLU_10AWG 102.82
J2-102.78
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (8)
CB2-102.89
3P 208V 30A 10KAIC
UL489 MCB (9)
BLK_10AWG 102.89
RED_10AWG 102.91
BLU_10AWG 102.93
J2-102.89
4P 208V 30A
L21-30R LOCKING
RECEPTACLE (9)
CB2-102.100
3P 208V 20A 10KAIC
UL489 MCB (10)
BLK_12AWG
RED_12AWG
BLU_12AWG
WHT_12AWG
GRN_12AWG
BLK_12AWG 102.100
RED_12AWG 102.102
BLU_12AWG 102.104
J2-102.100
4P 208V 20A
L21-20R LOCKING
RECEPTACLE (10)
208V N
101.39
to 103.05
208V L1
101.39A
to 103.05
208V L2
101.39B
to 103.05
208V L3
101.39C
to 103.05
LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143
TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1
DRAWN BY
L.Calib
DATE
03-04-2025
REV
A
CHECKED BY
SHEET #
2 OF 7
DRAWING #
102

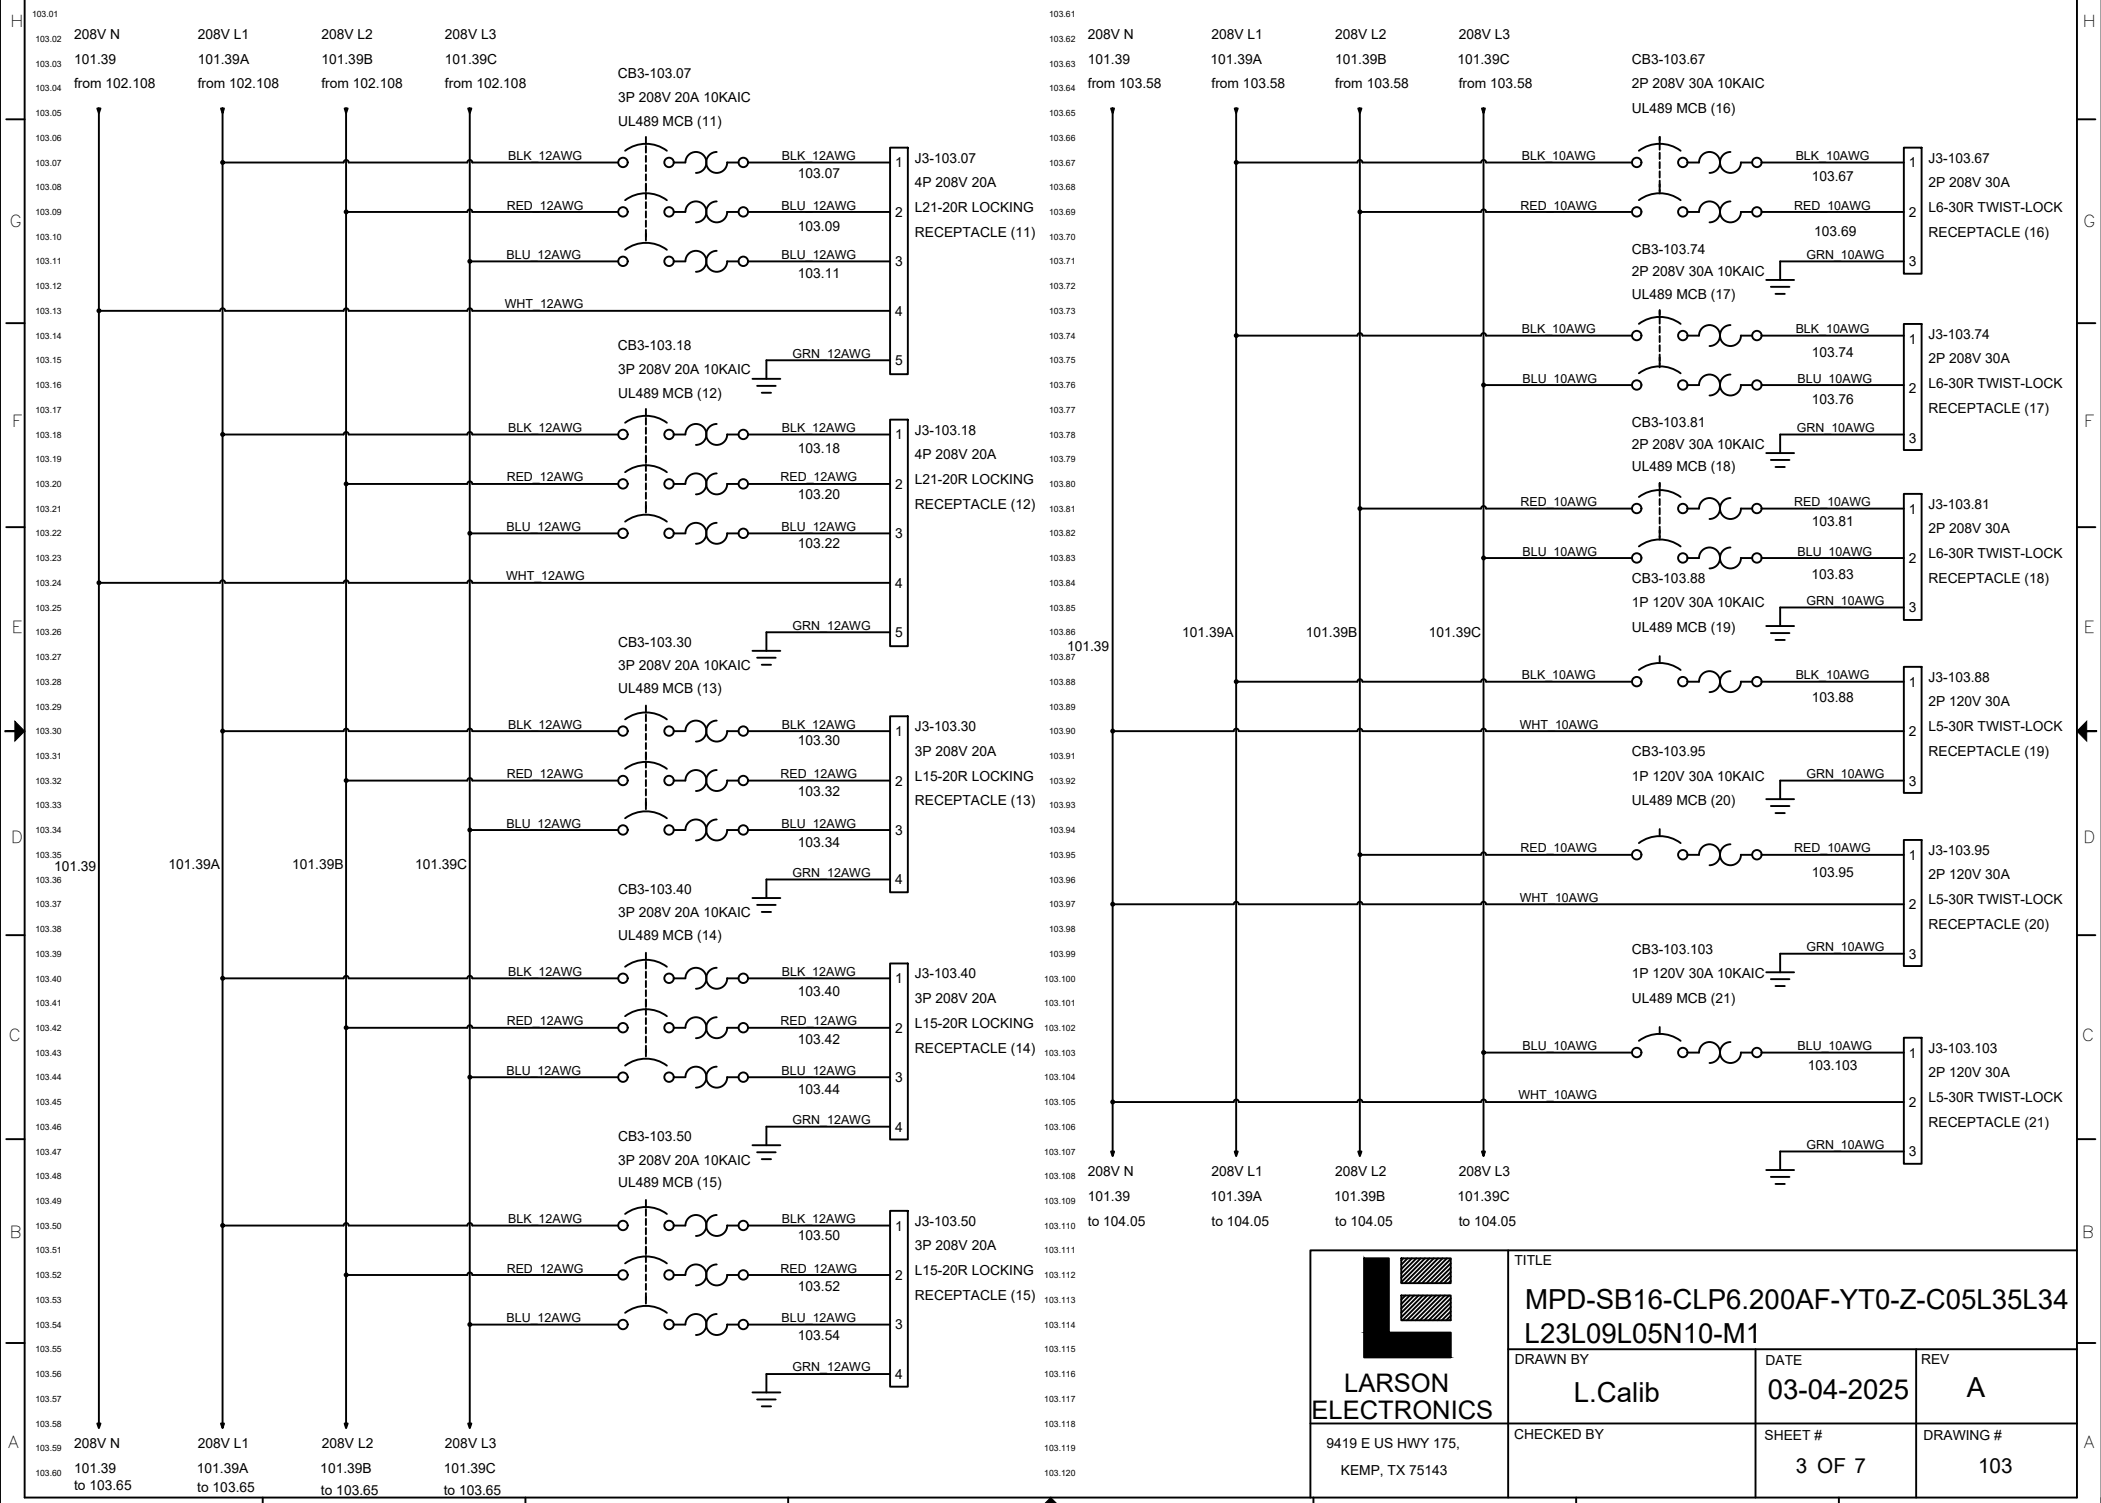


LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE

MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1


DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	3 OF 7	103

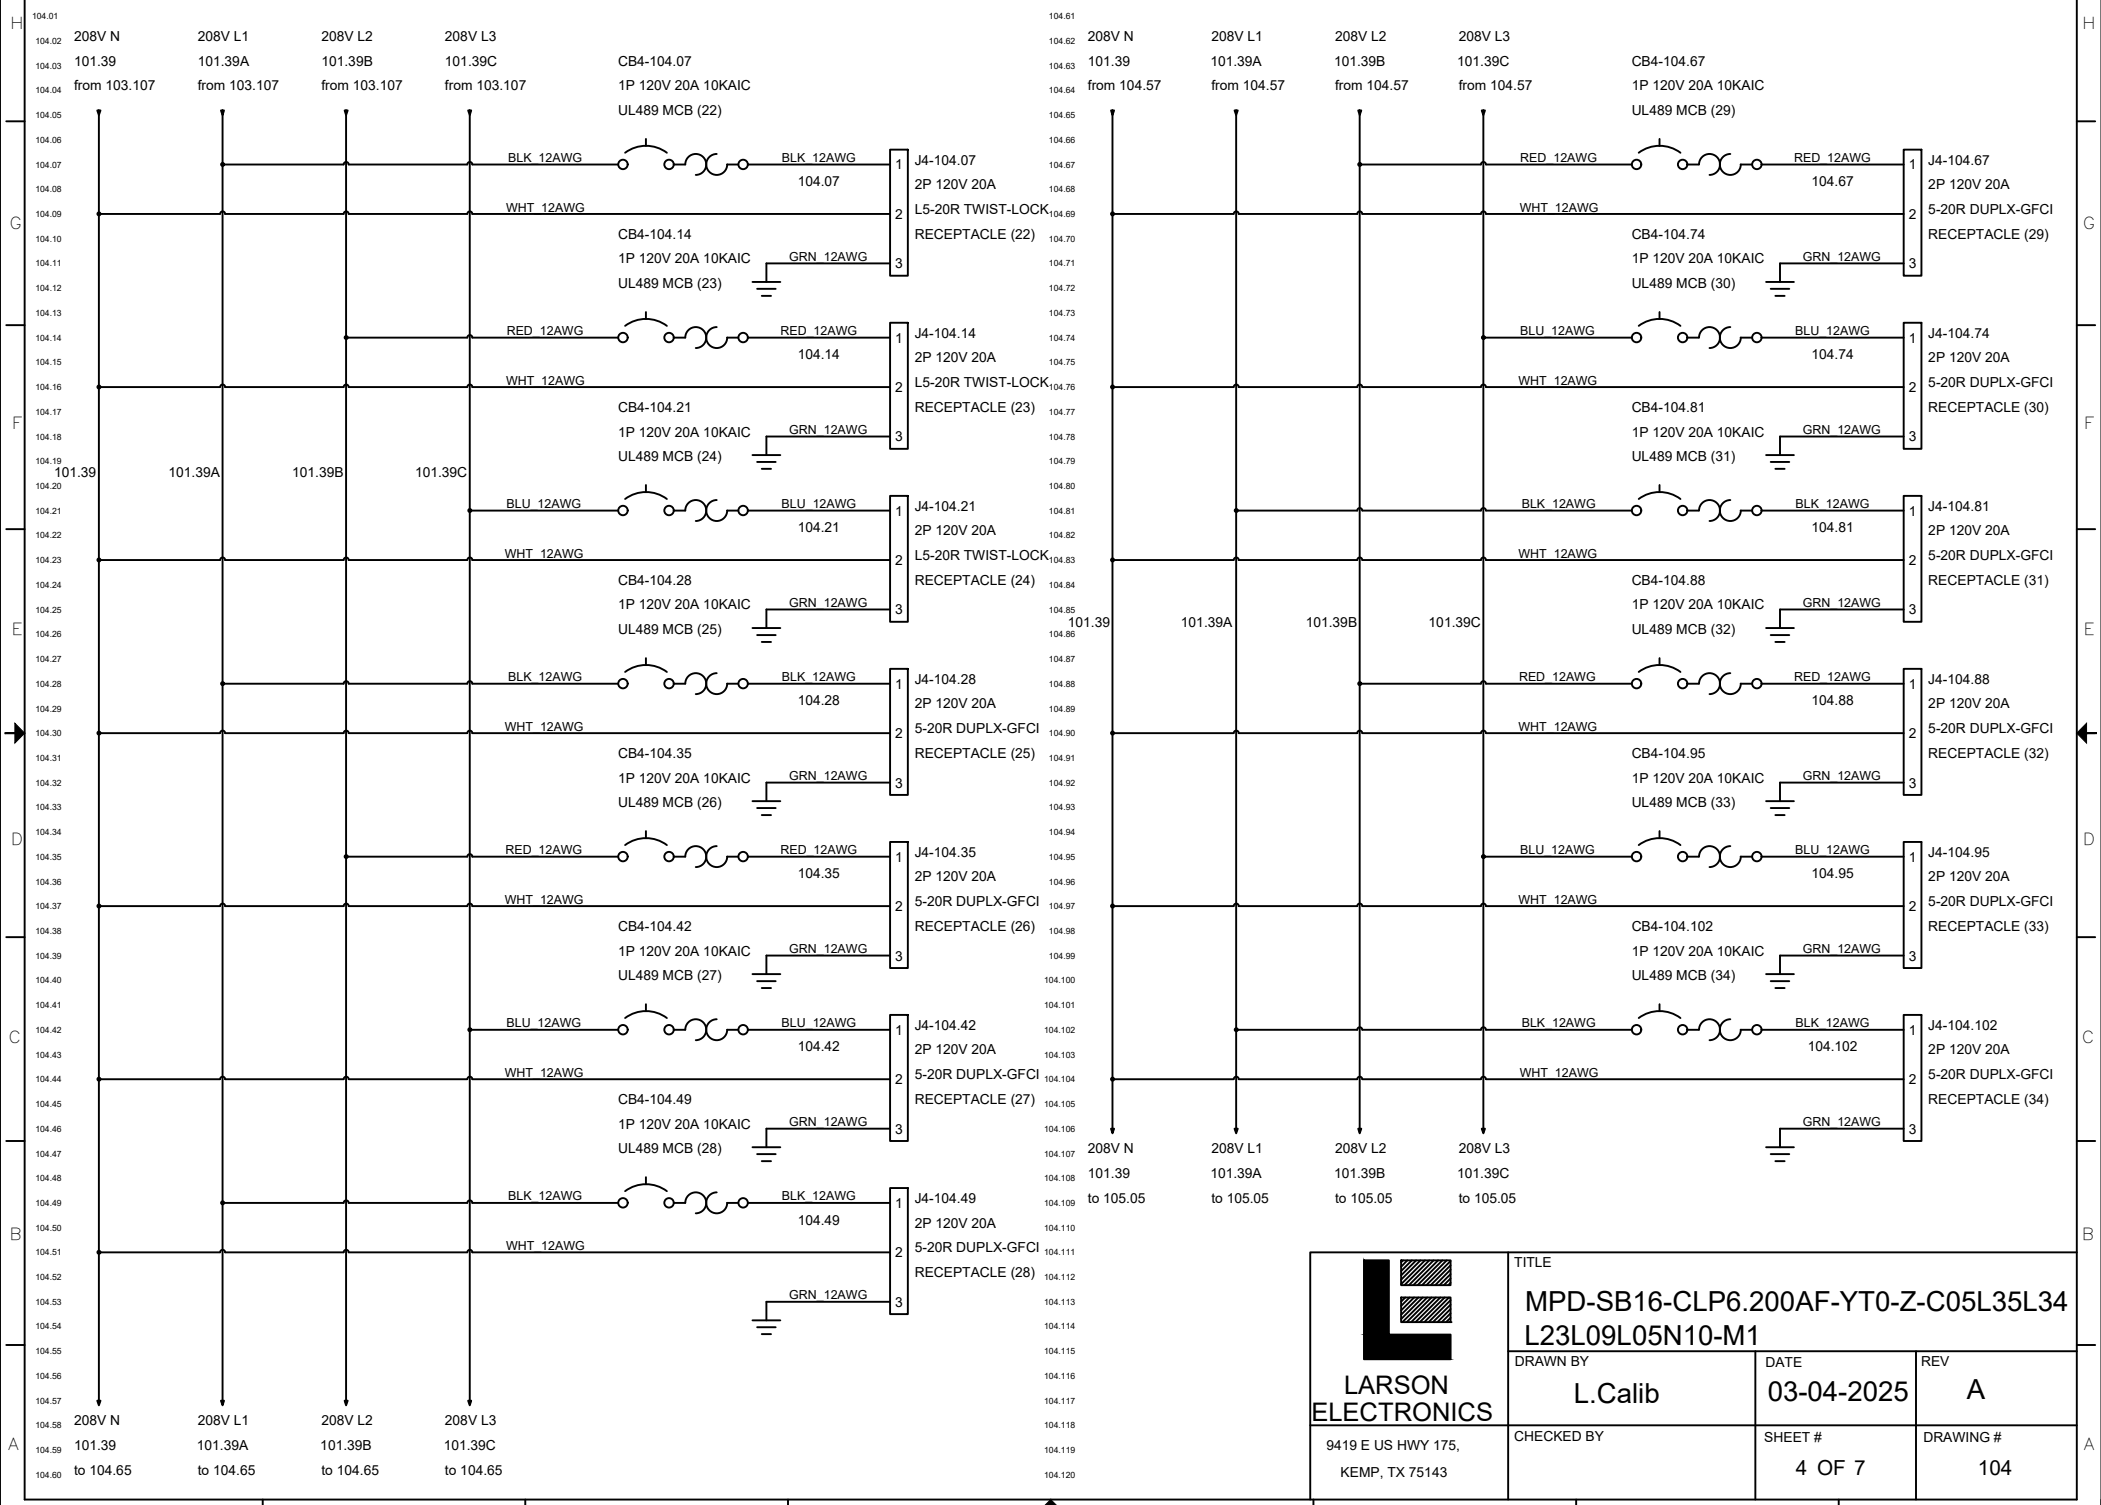

LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE			
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34 L23L09L05N10-M1			
DRAWN BY	L.Calib	DATE	03-04-2025
REV	A		
CHECKED BY		SHEET #	4 OF 7
DRAWING #	104		

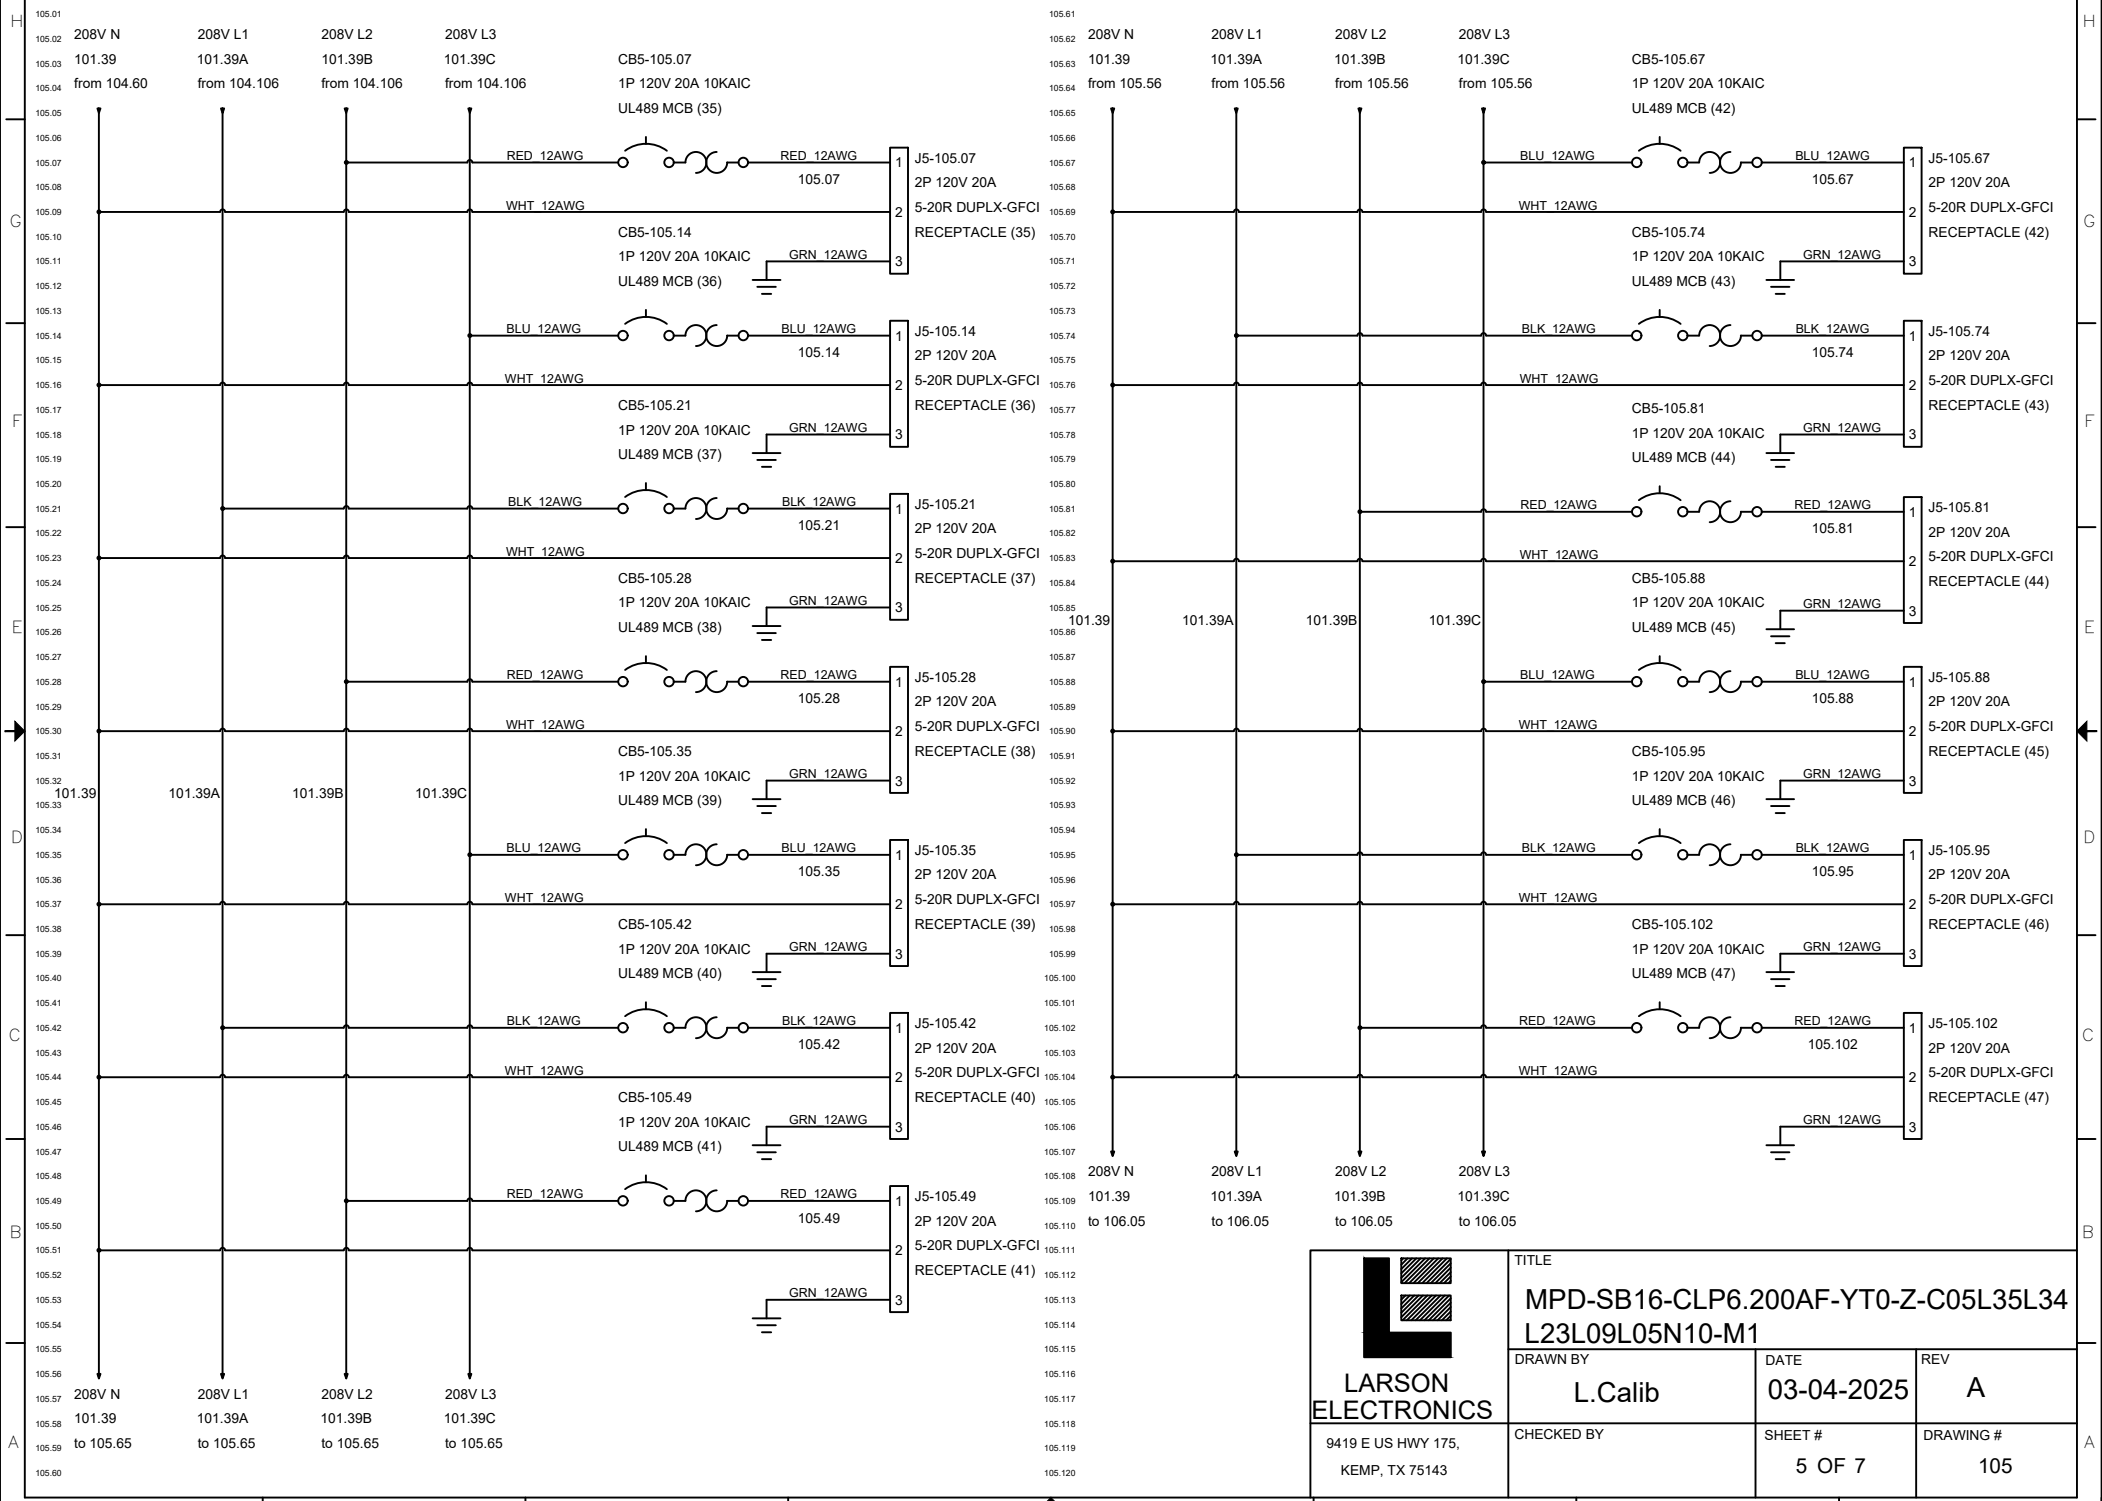


LARSON ELECTRONICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34 L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	5 OF 7	105

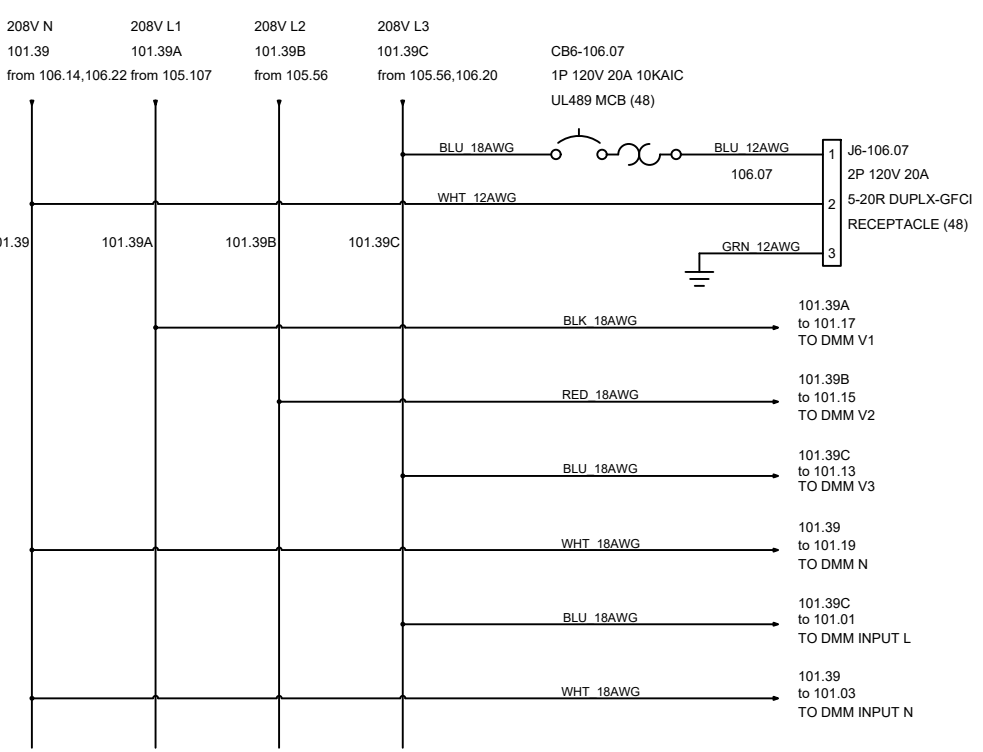

TAGS	QTY	CATALOG	DESCRIPTION
J3-103.103 J3-103.88 J3-103.95	3	UNV00008907	L5-30R 125V 30A LOCK RING RECEPTACLE
J2-102.67 J2-102.78 J2-102.89	3	UNV00007119	3P 5W 120/208V 30A L21-30R LOCKING RECEPTACLE
2 HOLE GRND LUG	1	UNV00007136	2 HOLE GROUND LUG
P1-101.30	1	UNV00002290	600V 400A MALE CAM LOCK WHITE
P1-101.21	1	UNV00008711	600V 400A MALE CAM LOCK BLACK
P1-101.33	1	UNV00008712	600V 400A CAM LOCK GREEN
P1-101.24	1	UNV00008715	600V 400A MALE CAM LOCK RED
P1-101.27	1	UNV00008710	600V 400A MALE CAM LOCK BLUE
J4-104.07 J4-104.14 J4-104.21	3	UNV00005543	1P 120V 20A L5-20R LOCKING RECEPTACLE
J2-102.35 J2-102.43 J2-102.51	3	UNV00008819	CS8269 2P 50A 250V LOCK RECEPTACLE
J2-102.07 J2-102.16 J2-102.25	3	UNV00012061	CS8269 RECEPTACLE 3P 50AMPS 250V 3PIN 4 WIRE
J2-102.100 J3-103.07 J3-103.18	3	UNV00013866	208Y/120V 20A L21-20R TWIST-LOCK

TAGS	QTY	CATALOG	DESCRIPTION
J3-103.67 J3-103.74 J3-103.81	3	UNV00007127	L6-30R TURN LOCK 250V 30 AMP RECEPTACLE
J4-104.102 J4-104.28 J4-104.35 J4-104.42 J4-104.49 J4-104.67 J4-104.74 J4-104.81 J4-104.88 J4-104.95 J5-105.07 J5-105.102 J5-105.14 J5-105.21 J5-105.28 J5-105.35 J5-105.42 J5-105.49 J5-105.67 J5-105.74 J5-105.81 J5-105.88 J5-105.95 J6-106.07	24	UNV00014533	5-20R 1P 20A 125V GFCI RECEPTACLE
J1-101.45	1	UNV00013755	600V UPTO 400A #2-4/0 AWG RED FEMALE CAM LOCK RCPT.
J1-101.48	1	UNV00013756	600V UPTO 400A #2-4/0 AWG BLU FEMALE CAM LOCK RCPT.
J1-101.54	1	UNV00013758	600V UPTO 400A #2-4/0 AWG GRN FEMALE CAM LOCK RCPT.
J1-101.51	1	UNV00013752	600V UPTO 400A #2-4/0 AWG WHT FEMALE CAM LOCK RCPT.
J1-101.42	1	UNV00013753	600V UPTO 400A #2-4/0 AWG BLK FEMALE CAM LOCK RCPT.
J3-103.30 J3-103.40 J3-103.50	3	UNV00013592	3P 240V 20A L15-20R LOCING RECEPTACLE
CB3-103.103 CB3-103.88 CB3-103.95	3	UNV00015146	1-P 30 AMP 120/240 V DIN RAIL MOUNT BREAKER
CB2-102.35 CB2-102.43 CB2-102.51	3	UNV00014731	2P 250V 50A DIN RAIL MOUNT MCCB UL489
CB2-102.67 CB2-102.78 CB2-102.89	3	UNV00015171	3P 30A 240V UL489 DIN RAIL MOUNT CIRCUIT BREAKER
CB2-102.07 CB2-102.16 CB2-102.25	3	UNV00015175	250V 50A 3P UL489 MINIATURE CIRCUIT BREAKER

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	6 OF 7	106


TAGS	QTY	CATALOG	DESCRIPTION
CB4-104.07 CB4-104.102 CB4-104.14 CB4-104.21 CB4-104.28 CB4-104.35 CB4-104.42 CB4-104.49 CB4-104.67 CB4-104.74 CB4-104.81 CB4-104.88 CB4-104.95 CB5-105.07 CB5-105.102 CB5-105.14 CB5-105.21 CB5-105.28 CB5-105.35 CB5-105.42 CB5-105.49 CB5-105.67 CB5-105.74 CB5-105.81 CB5-105.88 CB5-105.95 CB6-106.07	27	UNV00017491	1P 125V 20A 10KA UL489 DIN RAIL MOUNT BREAKER
CB3-103.67 CB3-103.74 CB3-103.81	3	UNV00017628	2P 240V 30A UL489 CIRCUIT BREAKER
CB2-102.100 CB3-103.07 CB3-103.18 CB3-103.30 CB3-103.40 CB3-103.50	6	UNV00015169	3P 20A 480/240V UL489 CIRCUIT BREAKER
CT1-101.22 CT1-101.25 CT1-101.28	3	UNV00016463	AC Transformer, Solid Core, 200A to 5A, 1.56" sensing window
DMM1-101.11	1	UNV00016483	POWER METER, 1&3-PH, POSITIVE LCD, 100-240V
FU1-101.13 FU1-101.15 FU1-101.17	3	UNV00016473	0.5 Amp 250V Glass Fuse
LT1-101.36 LT1-101.36A LT1-101.38	3	UNV00015469	125V RED INDICATOR LIGHT 1.5MA
TB1-101.22 TB1-101.25 TB1-101.28 TB1-101.31	4	UNV00016551	620A 4 HOLE TERNINAL BLOCK
T01-101.38 T01-101.38A T01-101.38B T01-101.38C	4	UNV00014768	22 HOLE 10IN BUS BAR
GRND BAR KIT 1 GRND BAR KIT 2	2	UNV00013942C	GROUND BAR KIT

LARSON ELECTRONICS
9419 E US HWY 175,
KEMP, TX 75143

TITLE
MPD-SB16-CLP6.200AF-YT0-Z-C05L35L34
L23L09L05N10-M1

DRAWN BY	DATE	REV
L.Calib	03-04-2025	A
CHECKED BY	SHEET #	DRAWING #
	7 OF 7	107


WARNING
FOR USE BY QUALIFIED PERSONNEL ONLY – The routing of portable supply conductors, the making and breaking of supply connectors, and the energization and de-energization of supply services shall be performed by qualified personnel only.
LARSON ELECTRONICS
MPD-SB09-CLP-FM-YTSYT-LZ-3.L35-12.N04-R1
LARSONELECTRONICS.COM
1-800-369-6671
sales@larsonelectronics.com
LARSON ELECTRONICS
LARSON ELECTRONICS LLC-KEMP, TX
CAUTION
HIGH VOLTAGE
1-800-369-6671 / LARSONELECTRONICS.COM
CAUTION
SHED ALL LOADS
BEFORE TURNING
ON / OFF

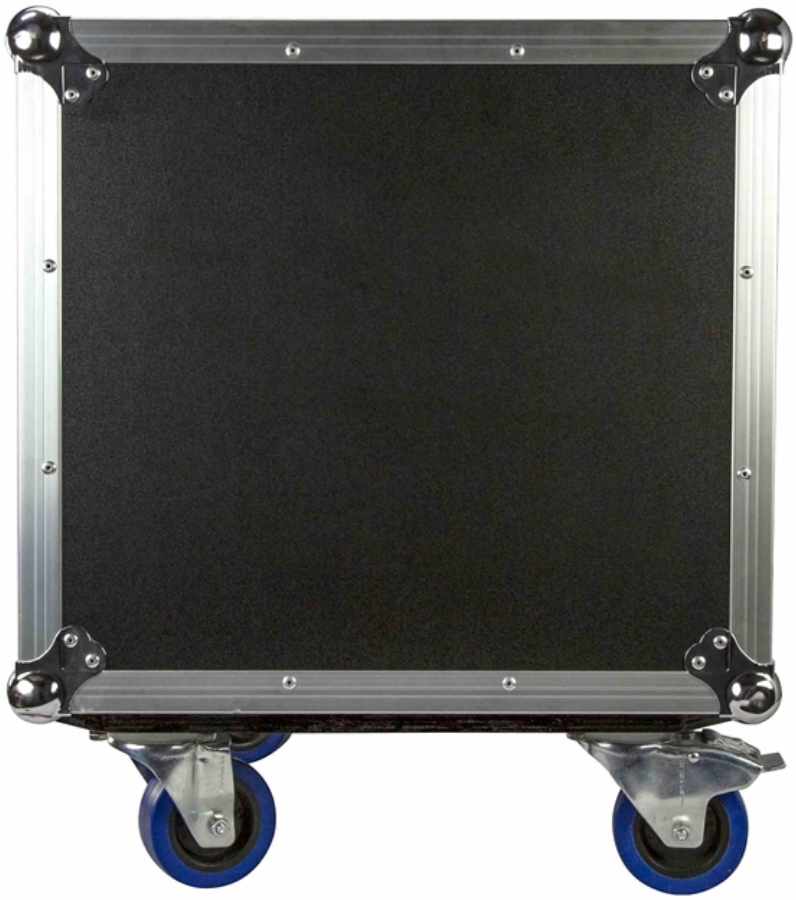


WARNING
LARSON ELECTRONICS
CAUTION
SHED ALL LOADS BEFORE TURNING
ON / OFF


WARNING
LARSON ELECTRONICS
CAUTION
ON/OFF
CAUTION
HIGH VOLTAGE

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards
ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the statements(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL Series from Larson Electronics LLC utilize components certified to NEC and CEC standards. Larson Electronics LLC specifies wiring device standard designations (e.g. NEMA 5-20R, NEMA L6-30R, CS8265C) in the electrical diagrams and spec sheet of each product. Unless specified, the brands of components used, which may vary based on availability at the time of build, include but are not limited to: Hubbell, Leviton, Molex, Daniel Woodhead, Legrand, Eaton, Thomas & Betts, Russel Stroll, Meltric, Mennekes, ABB Group, Emerson, Appleton, Crouse Hinds, Killark, R.Stahl, or other certified equipment manufacturers.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

TECHNICAL INFORMATION

POWDURA® POLYESTER TGIC
POWDER COATING

PRODUCT DESCRIPTION

PLR2-60002
RAL 5010 GENT BLUE

POWDURA® Polyester TGIC Powder Coatings are recommended for a broad range of interior/exterior functional and decorative applications.

Advantages:

- Provides excellent overbake resistance
- Good chemical resistance
- Very good outdoor exposure qualities
- Wide range of special effects available
- Available in a broad range of colors

Many applications, including:
Steel Furniture
Refrigeration
Electronic Cabinetry
Scaffolding
Electrical Equipment
Instrument Housings

Appliances
Sporting Goods

Storage: Powdura® Powder Coatings should be kept in a dry and cool area at temperatures below 80°F (27°C). When not in use, store powder in sealed containers: fine powders are hygroscopic.

Substrate Preparation: Substrate should be free of grease, oil, dirt, fingerprints, drawing compounds, any contamination, and surface preparation treatments to ensure optimum adhesion and coating performance properties. The use of a chemical conversion coating prior to the application of a powder coating is strongly recommended.

Testing: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full-scale application.

CAUTIONS

Thoroughly review product SDS prior to using this product. Please consult your local sales representative or your local Sherwin-Williams facility for additional information.

Special Advisory: River texture type finishes are unique finishes that may vary with application, film thickness and cure conditions. Light colors and very dark colors may occasionally show colored specks that appear as contamination. This is the nature of this type of finish and cannot be predicted or controlled. Thorough cleaning is required when switching to a normal smooth powder coating to prevent craters in the smooth finish.

APPLICATION

Cure Schedule:	10 MIN @ 400F
Film Thickness Range(mils):	3.0-5.0

ATTRIBUTES

Specific Gravity(g/ml):	1.72
Coverage at 1.0 Mil(ft^2/lb):	112.4
60° Gloss: (ASTM D-523)	15-30
Adhesion: (ASTM D-3359)	5B
Flexibility: (ASTM D-522)	Pass 1/8"
Pencil Hardness: (ASTM D-3363)	H-2H
Impact Resistance(in.lb): (ASTM D-2794)	Dir 100 in-lbs Rev 100 in-lbs

Note: Performance measured using 24-gauge Bonderite® 1000 test panels.

Shelf Life:	12 Months

Sherwin-Williams recommends that all material be used in FIFO order (first in - first out). Materials that exceed the recommended shelf life should be tested prior to use.

Note:
Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating and opinions stated above pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application, which are not known, or under our control, The Sherwin-Williams Company cannot make any warranties or guaranties as to the end results.

08 00

Grove City Product Mod

24-Mar-2020

Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MGL, MPD, MGS, WAL Series industrial line of portable power distribution systems are considered "ARTICLES" under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

i. Which is formed to a specific shape or design during manufacture;
ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

<- Back

Product Description

Title:	STAGE & STUDIO PORTABLE WIRING COMPARTMENTS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

<- Back

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)
Email
dirlist@intertek.com

Intertek Home
Product Directories

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

intertek
Total Quality. Assured.



<- Back

Product Description

Title:	INDUSTRIAL CONTROL EQUIPMENT
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	Industrial Control Panels For General Use. Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

<- Back

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478 (or +1-847-660-7407)
Email
etldirectory@intertek.com

Intertek Home
Product Directories
DLP on mobile devices

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Evaluated Standards:

AISC: Structural steel skid design
NFPA 70: National Electrical Code
ASTM A36: Standard Specification for Carbon Structural Steel
ASTM A123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A489: Standard Specification for Carbon Steel Lifting Eyes
ASTM A502: Standard Specification for Rivets, Steel, Structural
ASTM A563: Standard Specification for Carbon and Alloy Steel Nuts
ASTM A500: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
ASTM B172: Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors
ASTM D7803: Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Powder Coating
SAE J429: Mechanical and Material Requirements for Externally Threaded Fasteners
AWS D1.1: Structural Welding – Steel
ICEA S-58-679: Standard for Control, Instrumentation and Thermocouple Extension Conductor Identification
ICEA S-75-381: Portable and Power Feeder Cables for Use in Mines and Similar Applications
NEMA OFP 1-2017: Protection of Receptacle Outlets in Wet Locations According to the National Electrical Code

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

NEMA PB 1-2011: Panelboards
NEMA ST 20-2014: Dry Type Transformers for General Applications
NEMA WD 1-1999 (R2015): General Color Requirements for Wiring Devices
ANSI C80.1-2015: American National Standard for Electric Rigid Steel Conduit
ANSI C119.4-2016: American National Standard for Electric Connectors
ANSI Z535.4-2011: American National Standard for Product Safety Signs and Labels
ANSI/IEC 60529-2004 (R2011): American National Standard for Degrees of Protection Provided by Enclosures (IP Code)

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The MGL, MPD, MGS, WAL series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union (“EU”) Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances (“REACH”).

REACH does not apply to manufactured products which are referred to as “completed articles”. Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Frequently Asked Questions (FAQ)