

MPD-MDS-CB-208Y.120-3P-8000A-N1-M1

8000A Switchboard w/ 8000A Circuit Breaker - 208Y/120 3PH 4W, 60Hz - NEMA Type 1

Product ID: 317591



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-MDS-CB-208Y.120-3P-8000A-N1-M1 Industrial Switchboard

Unit Type: Switchboard with Main Circuit Breaker

Bus Max Amp Rating: 8000 Amps

Input: N/A

Fuses: N/A

Receptacles: Included, GFCI

Bus Voltage Rating: 208Y/120 AC Wye-N, 3PH, 60Hz

Wiring Configuration: 4-Wire

Poles: 4-Poles

Bus Max Available Fault Current (RMS): 65 kAIC

Incomer Main Circuit Breaker Rating: 8000AT/8000AF LSIG, w/ Shunt Trip coil

Incomer Current Transformer: Included, (3) Current Transformers

Ratings/Features

NEMA Type 1 Enclosure

Rodent Barrier

24V Trip Unit Display Power

Certified to UL Dead front Switchboard Standards

24/7 Utility Lockable and Accessible

Outgoing Panels:

Panel #1: (1) 4000AT/4000AF-3P-65 kAIC CB, (1) 20AT-1P-10 kAIC CB, and (1) 15AT-1P-10 kAIC CB

Panel #2: (2) 4000AT/4000AF-4P-65 kAIC LSIG CBs, Terminal Lugs 12 sets of 750kcmil Copper and 1x350 kcmil Ground Each

Panel #3: Tie Breaker Panel

Panel #4: (2) 4000AT/4000AF-4P-65 kAIC LSIG CBs, Terminal Lugs 12 sets of 400kcmil Copper and 1x350 kcmil Ground Each

Protection: Ammeter Trip Unit, Long Time, Short Time, Instantaneous, Ground Fault, Over Current Trip Switch

Surge Protection Device: Included

Display: N/A

Aux Contacts: (4) Form C

Ground Bus: 1/4 x 2 IN copper, continuous over length of switchboard and solidly grounded to each vertical section structure

Temperature Rise: 65oC

Thermostat: Included, Strip Type

Space Heaters: Included, Thermostatically Controlled
Terminal Blocks: Included
Contact Wear Indication: Visual
Ground Lug: Provided
Bus Material: Silver Plated Copper
Enclosure Material: Coated Steel
Entry Point: Front Access
Connection Type: Cable
Phase Wire Range: TBD
Enclosure Type/Rating: Non-walk-in NEMA 1, Weatherproof
Enclosure Paint Color: ANSI 49
Mounting Type: Floor Mounted
Dimensions: 168" W x 96" H x 48" D
Weight: 1,405 lbs

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The MPD-MDS-CB-208Y.120-3P-8000A-N1-M1 from Larson Electronics is a Switchboard with Circuit Breaker for power distribution systems. This 8,000-amp rated power distribution unit is compatible with three-phase 208Y/120 AC Wye-N, 60Hz. Equipped with an open-bottom configuration, the system is encased in a NEMA Type 1 enclosure that is painted ANSI 49.

The MPD-MDS-CB-208Y.120-3P-8000A-N1-M1 AC is designed for power distribution in industrial facilities. This 3-wire unit operates with three-phase 208Y/120V Wye-N, 60Hz. With a 8000-amp system ampacity, the switchboard with circuit breaker has an 65kA RMS short circuit rating and four, form c auxiliary contacts with visual contact wear indication. Protective features include: ammeter trip unit, long time, short time, instantaneous, ground fault, over current trip switch and rodent barrier. This system contains a 24V trip unit display power. The Type 1 unit comes with ground lugs and is painted ANSI 49.

Wiring: The MPD-MDS-CB-208Y.120-3P-8000A-N1-M1 accepts cable connections with a phase wire range of 3/0 - 750 kcmil.


Mount: The MPD-MDS-CB-208Y.120-3P-8000A-N1-M1 can be securely mounted to any flat surface. This non-walk-in system is accessible through the front with a left of lineup through the bottom entry point.

Applications: Residential and light commercial applications, air conditioning units and any other power distribution systems that require overload breaker protection.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.





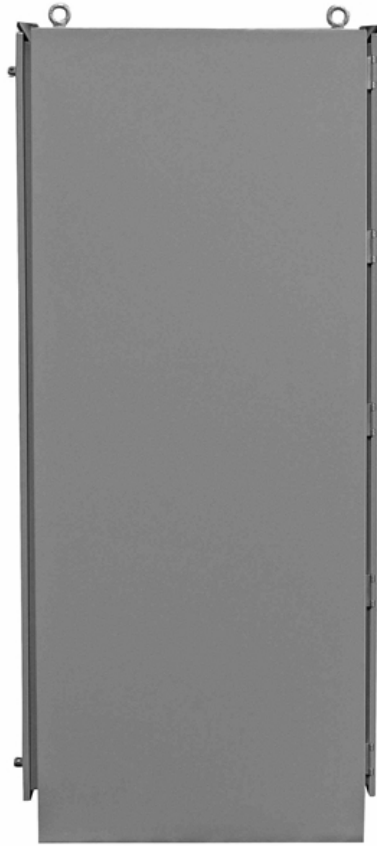



Frequently Asked Questions (FAQ)