Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R

0.8 kVA Autotransformer - 110V Primary - 22 x 110 x 186V Secondary - NEMA 3R - Fully Potted - 1 Phase

Product ID: 318909



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R Fully Potted Autotransformer

Phase: Single Phase
Frequency: 25/100 Hz
Capacity: 0.8 kVA
Primary Voltage: 110 V
Secondary Voltage: 22 x 110 x 186 V
Winding Material: Copper
Taps: None
Insulation: 180°C
Temperature Rise: 115°C
Primary Termination: -
Secondary Termination: -
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: NEMA Type 3R Heavy Duty - Resin Encapsulated
Finish: ANSI 61 Grey Finish
Dimensions: 10.50"H x 5.50"W x 5.13"D
Weight: 24 lbs

Approvals/Ratings

NRTL Compliant for United States and Canada
NEMA 3R Rated
ANC Cooling
Fully Potted Autotransformer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R 800 VA 1 Phase Energy Efficient Fully Potted Autotransformer from Larson Electronics is powerful, reliable and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R provides increased reliability, protection against critical equipment failures and an extra level of protection by

isolating the power source from the connected device. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 0.8 kVA, the MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R fully potted autotransformer is a single phase unit with a primary voltage of 110 V. It also provides a secondary voltage of 22 x 110 x 186 V. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology. This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be wall mounted. The unit also features a 180°C insulation with a 115°C temperature rise.

Benefits: The MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R autotransformer offers many benefits to the consumer. Precision cut copper transformer winding material helps to improve performance. The close tolerances used during manufacturing also eliminate burrs, which hinder performance. Each core is specially coated to prevent the ingress of moisture and is electrically balanced to minimize axial forces during short circuit situations.


This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated wall mounting brackets make installation fast and easy and the offset outward facing installation holes allow for easy power tool access.

Safety: The MT-ATX-FP-1P-110V-0.8KVA-22.110.186V-N3R is an autotransformer, which means that it has the ability to adjust the supply voltage to match specific load requirements when load isolation from the supply line is not required. Autotransformers are typically used is distribution systems that require small voltage corrections during operation.

Applications: Power supplies for sensitive equipment such as computers, medical devices, or laboratory instruments.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.



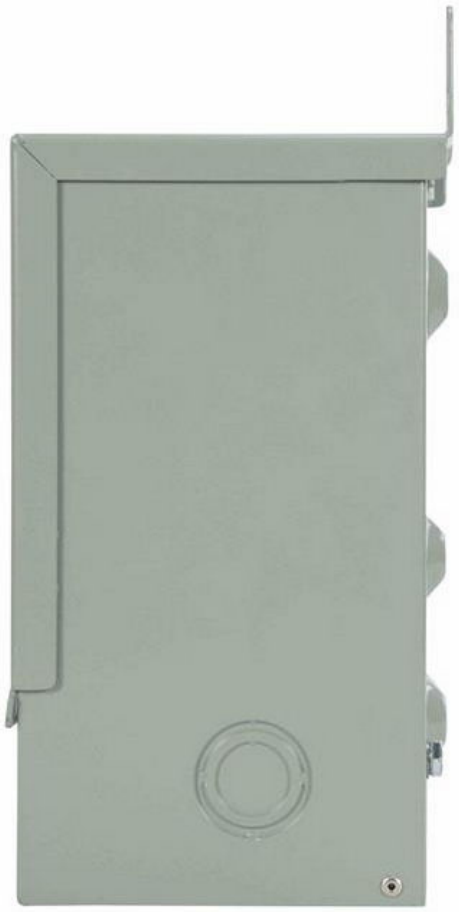



Frequently Asked Questions (FAQ)