Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C

5 kVA Prewired Isolation Transformer - 230V Euro Primary - 110/220V Secondary - (6) Outlets, N3R - 50/60Hz - Fully Potted/Encapsulated, 150' Cord w/ 240V EU Plug

Product ID: 319044



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C Fully Potted Isolation Transformer

Phase: Single Phase
Frequency: 50/60 Hz
kVA: 5
Configuration: NEMA/Encapsulated
Primary Voltage: European 230 V (L1+N)
Secondary Voltage: 110/220 V
Winding Material: Aluminum
Efficiency Regulation: No Efficiency Specification
Impedance: 1 - 5%
Insulation: 180°C
Temperature Rise: 130°C
Seismic Zone: Zone 4
Primary Connection: 150' Cord with 240V Italian EU Plug
Secondary Connection: (6) 110V US Outlets
Mounting: Wall
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: NEMA Type 3R Heavy Duty - Resin Encapsulated
Finish: ANSI 61 Grey Finish
Dimensions: 10.00"H x 17.25"W x 7.75"D
Weight: 108 lb

Approvals/Ratings

NRTL Listed for United States and Canada
IP14 Rated
Fully Potted / Encapsulated
Prewired Isolation Transformer

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

The MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C from Larson Electronics is a 230 V Euro (L+N) 1 Phase Energy Efficient 50/60 Hz Fully Potted Prewired Isolation Transformer that is powerful, reliable

and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C provides increased reliability, protection against critical equipment failures and an extra level of protection by isolating the power source from the connected device. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS*

Transformer Features: With a transformer rating of 5kVA, the MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C prewired isolation transformer is a single phase unit with a primary voltage of European 230 V single phase (L1+N). This L1+N model is considered European 230 V. It also provides a secondary voltage of 110/220 V. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This fully potted, 50/60 Hz unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be wall mounted. The unit also features 180° insulation with a 130°C temperature rise and is rated IP14.

Connections: The transformer contains a 150' power cord with a 240V Italian EU blue plug for input connection and six 110V US outlets for output connections.

Benefits: The MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C isolation transformer offers many benefits to the consumer. Precision cut aluminum transformer winding material help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations.

This fully potted, 50/60 Hz transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated wall mounting brackets make installation fast and easy and the offset outward facing installation holes allow for easy power tool access.


Safety: The MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C is a 50/60 Hz encapsulated isolation transformer which means that it provides operators with an increased level of protection against electric shock. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-ISX-1P-230V.EU-5KVA-110V-N3R-50HZ-6X110V-150C achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.

Applications: Power supplies for sensitive equipment such as computers, medical devices, or laboratory instruments.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


LARSON
ELECTRONICS
DRY TYPE ISOLATION
HV/HT
BIL
LISTED
LARSONELECTRONICS.COM
1-800-369-6671
sales@larsonelectronics.com
DANGER – HIGH VOLTAGE
DISCONNECT POWER BEFORE OPENING DOOR
SYSTEM VOLTAGE 600V CLASS
METTRE HORS TENSION AVANT D'OUVRIR
LA PORTE
DANGER – HAUTE TENSION



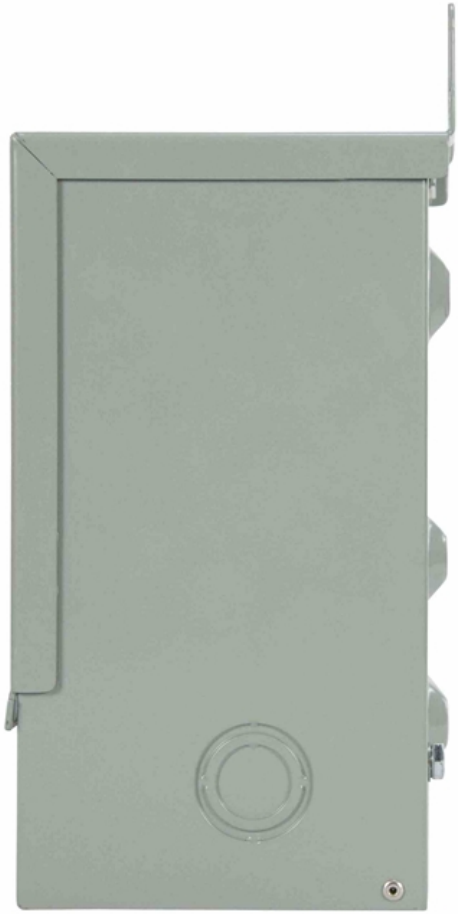



Frequently Asked Questions (FAQ)