Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU

60 VA Isolation Transformer - 240 x 280 x 320 x 360 x 400V Primary, 1600 x 2000 x 2400V Secondary - 1PH - NEMA 3R, 60 Hz, Copper, Fully Potted

Product ID: 319188



Image: MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU Isolation Transformer

Phase: Single Phase
Frequency: 60 Hz
Capacity: 60 VA
Primary Voltage: 240 x 280 x 320 x 360 x 400 V
Secondary Voltage: 1600 x 2000 x 2400 V
Total Output Currents: 4.8 A
Winding Material: Copper
Taps: None
Insulation: 130°C - B Class
Short CCT Voltage: 3%
Temperature Rise: 115°C
Primary Termination: -
Secondary Termination: -
Sound Level: 45 dBA
Enclosure Material: NEMA Type 3R Heavy Duty Ventilated
Finish: ANSI 61 Grey, UL50 Finish
Dimensions: 2.75"-W x 4.812"-D x 4.188"-H
Weight: ~2.20 lbs

Approvals/Ratings

Listing: UL Listed
CSA Certified
ANC Cooling
Isolation Transformer

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU 60 VA 1 Phase Energy Efficient Fully Potted Isolation Transformer from Larson Electronics is

powerful, reliable and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU provides increased reliability, protection against critical equipment failures and an extra level of protection by isolating the power source from the connected device. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 60 VA, the MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU fully potted isolation transformer is a single phase unit with a primary voltage of 240 x 280 x 320 x 360 x 400 V. It also provides a secondary voltage of 1600 x 2000 x 2400 V. Featuring robust construction, this unit's cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The Standard Type 3R enclosure makes the unit suitable for both indoor and outdoor applications and it can be either floor or wall mounted. The unit also features 130°C insulation (B Class) with a 115°C temperature rise.

Benefits: The MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU isolation transformer offers many benefits to the consumer. Precision cut copper transformer winding material helps to improve performance. The close tolerances used during manufacturing also eliminate burrs, which hinder performance. Each core is specially coated to prevent the ingress of moisture and is electrically balanced to minimize axial forces during short-circuit situations.


This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Integrated floor and wall mounting brackets make installation fast and easy and the offset outward facing floor installation holes allow for easy power tool access.


Safety: The MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU is an isolation transformer which means that it provides operators with an increased level of protection against electric shock. An isolation transformer can also suppress electrical noise in sensitive devices and transfer power between two circuits which must not be connected. The MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R-CU achieves these safety features by separating or "isolating" the powered device from the power source and insulation between the primary and secondary power sources.


Applications: Power supplies for sensitive equipment such as computers, medical devices, or laboratory instruments.


Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power


distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

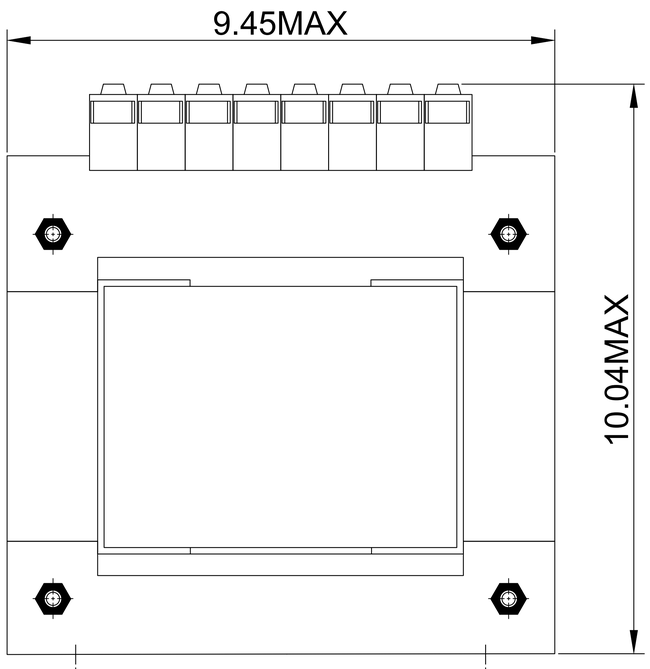

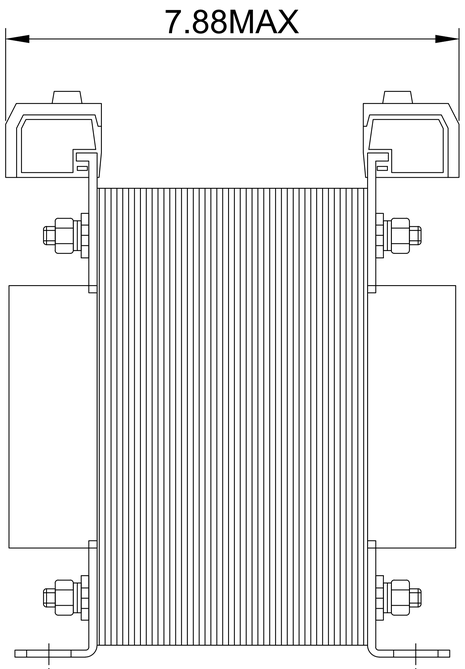

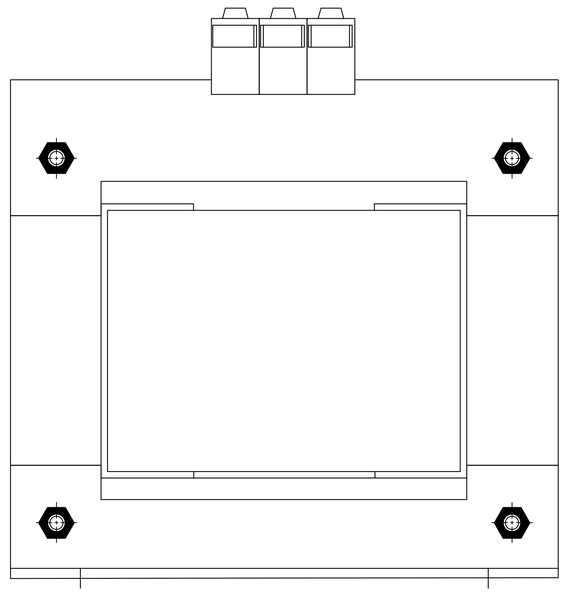

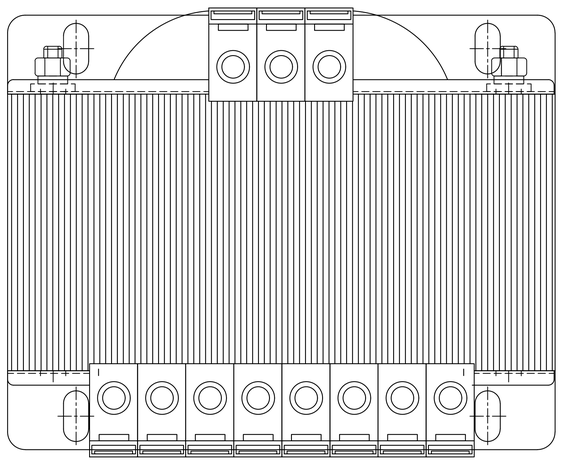

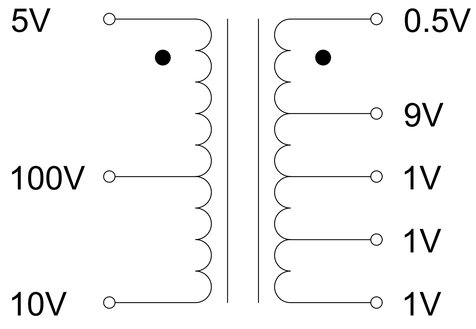


Phase	1	Frequency	60Hz
Capacity	60 VA		
Input	115V		
Output	12.5V		
Vector	Ii0		
Weight	3.5Lbs		


LARSON MAGNETICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R

DRAWN BY	DATE	REV
	03/17/2025	A
CHECKED BY	SHEET #	DRAWING #
	1 OF 2	101

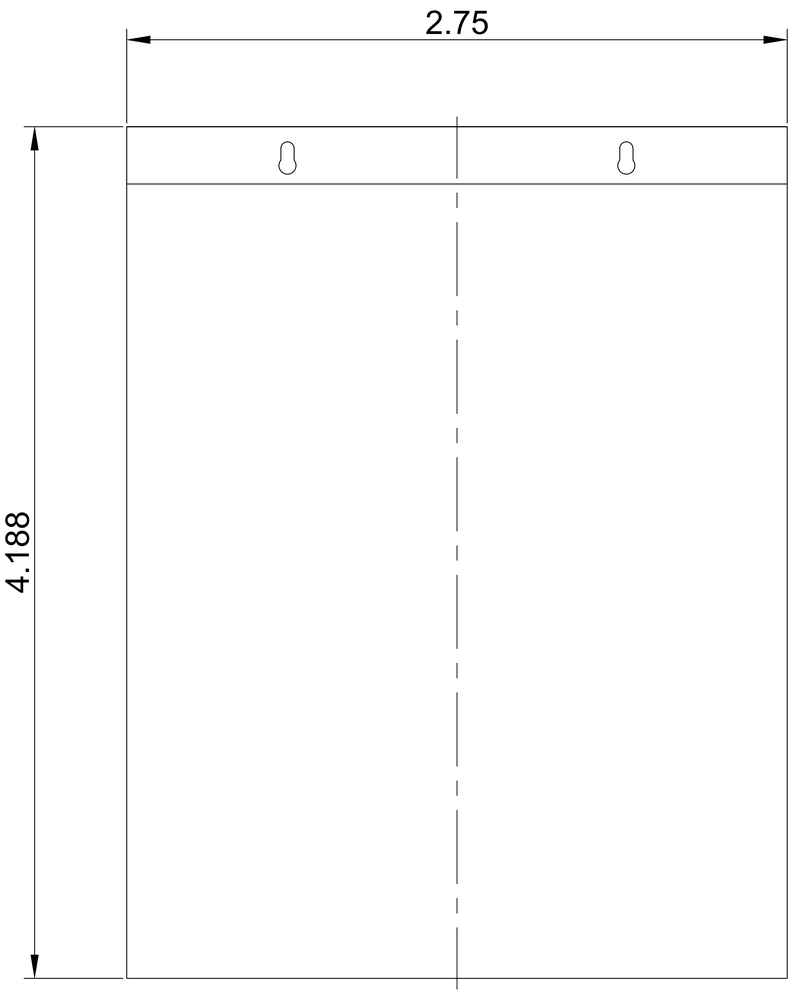


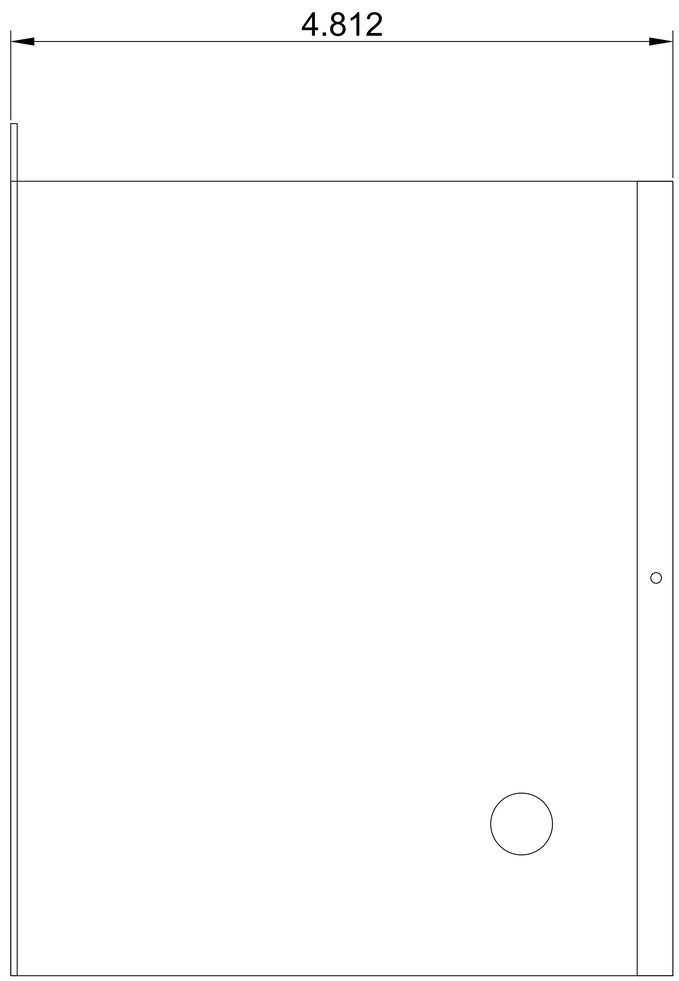



LARSON MAGNETICS


9419 E US HWY 175,
KEMP, TX 75143


TITLE		
MT-ISX-FP-1P-240.280.320.360.400V-60VA -1600.2000.2400V-60HZ-N3R		
DRAWN BY	DATE 03/17/2025	REV A
CHECKED BY	SHEET # 2 OF 2	DRAWING # 102

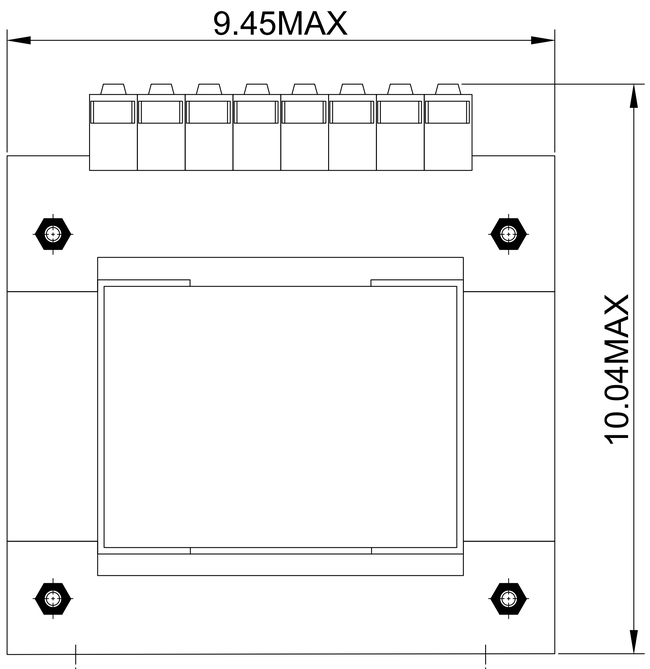

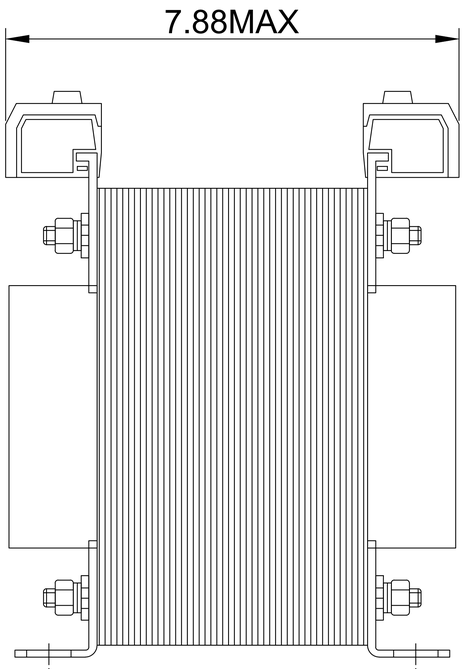

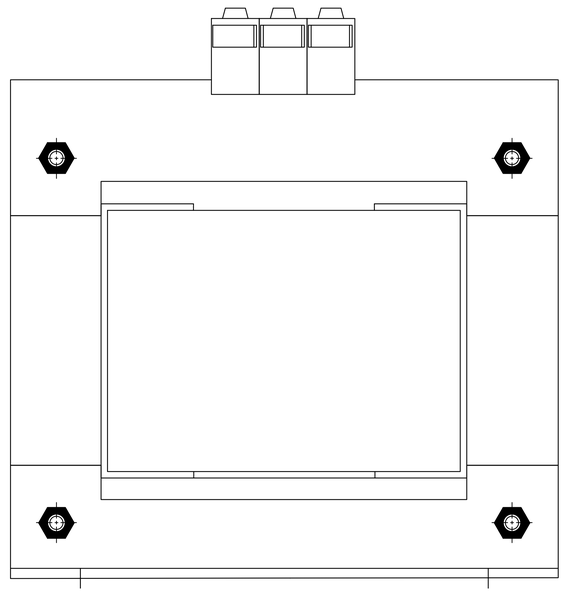

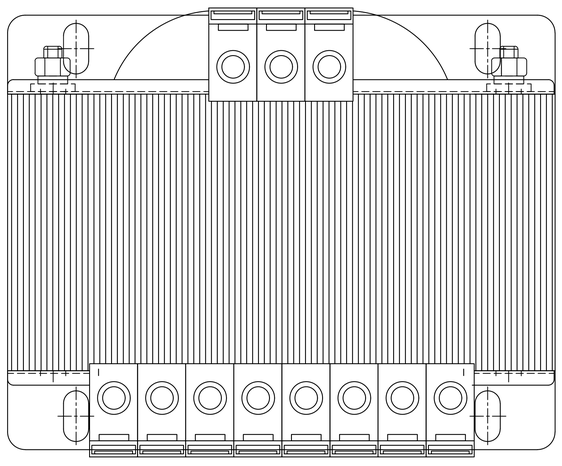

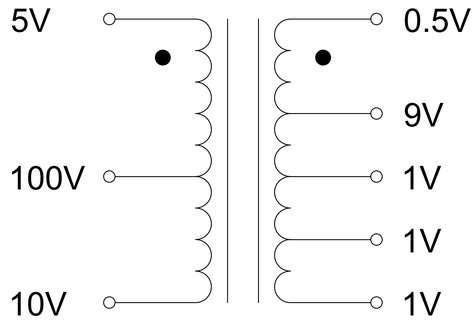


Phase	1	Frequency	60Hz
Capacity	60 VA		
Input	115V		
Output	12.5V		
Vector	Ii0		
Weight	3.5Lbs		


LARSON MAGNETICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE: MT-ISX-FP-1P-240.280.320.360.400V-60VA-1600.2000.2400V-60HZ-N3R

DRAWN BY	DATE	REV
	03/17/2025	A
CHECKED BY	SHEET #	DRAWING #
	1 OF 2	101

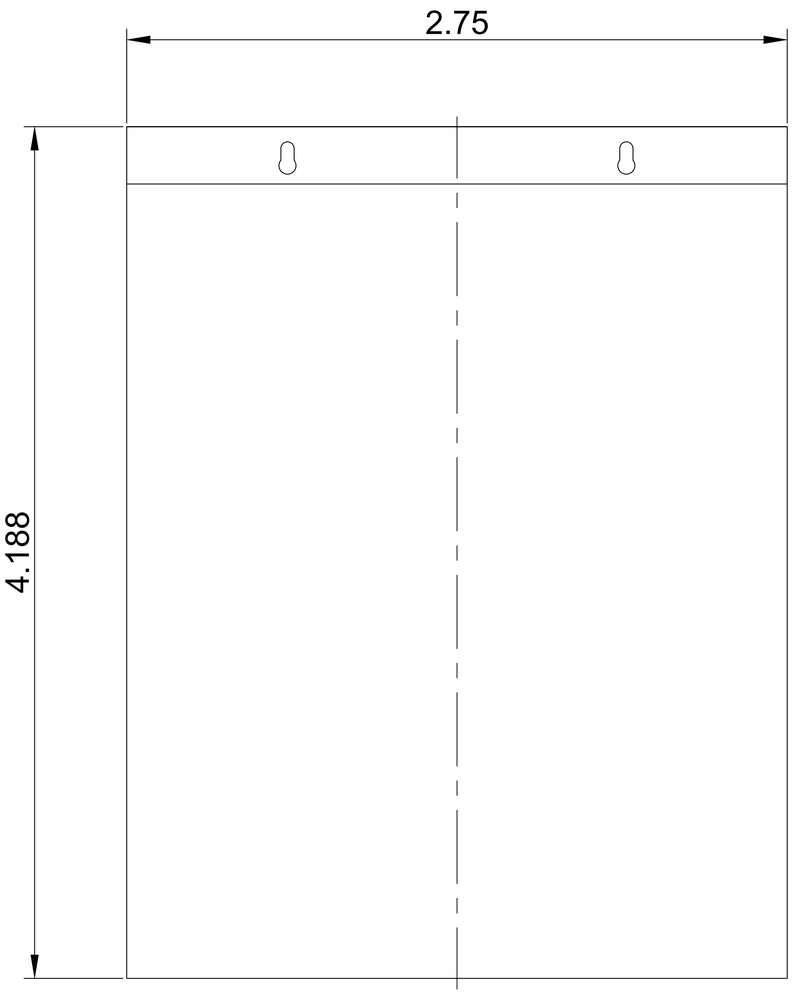

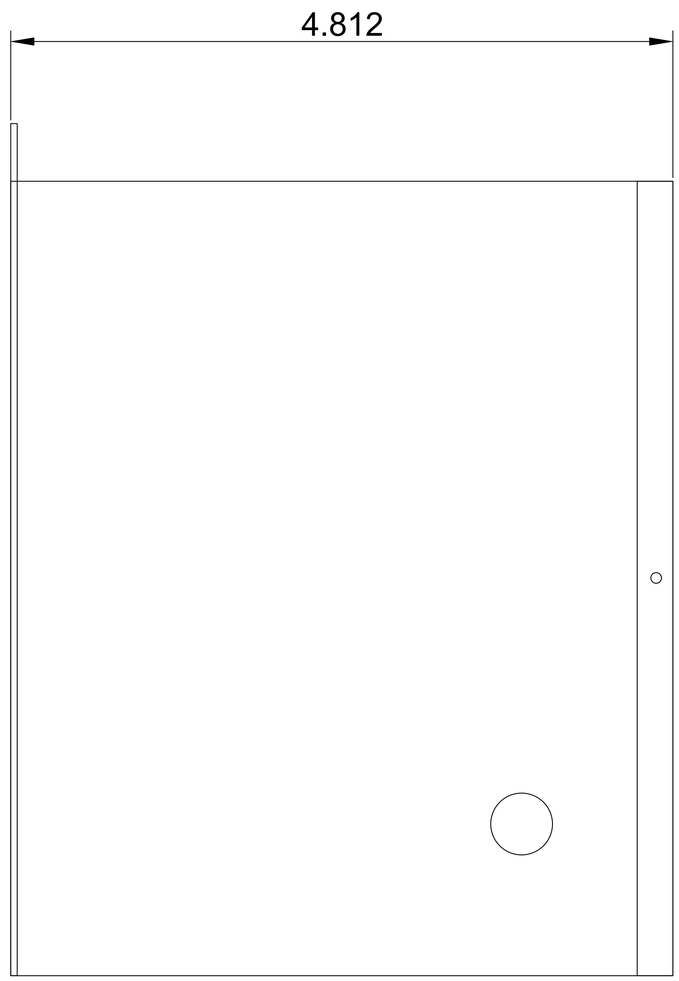

LARSON MAGNETICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE		
MT-ISX-FP-1P-240.280.320.360.400V-60VA -1600.2000.2400V-60HZ-N3R		
DRAWN BY	DATE 03/17/2025	REV A
CHECKED BY	SHEET # 2 OF 2	DRAWING # 102


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

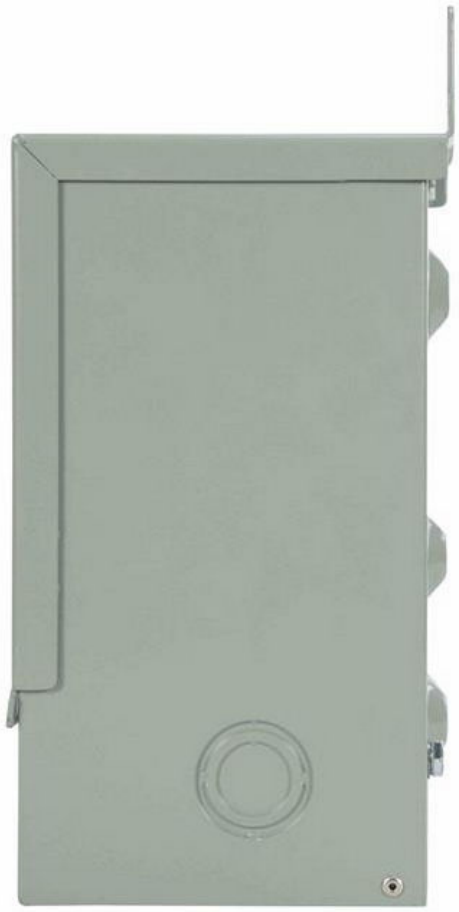

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs