Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-PSTC-R7-3P-DXK-90MVA-GMA-HT-LT-X6-BMFF-CZ-2ZZ-M3

90/120/150 MVA Substation Power Transformer, Conservator Type - 138000V Delta Primary, 34500Y/19920 Grounded Wye Secondary - ONAN/ONAF/ONAF, Mineral Oil - Dark Grey

Product ID: 333551



Image: MT-PSTC-R7-3P-DXK-90MVA-GMA-HT-LT-X6-BMFF-CZ-2ZZ-M3

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-PSTC-R7-3P-DXK-90MVA-GMA-HT-LT-X6-BMFF-CZ-2ZZ-M3 Conservator Transformer	Ratings
Transformer Type: Substation Power Transformer, Conservator Type (Sealed Bladder System)	Complies with ANSI / IEEE C57.12.00
Transformer Configuration: Liquid Filled	Complies with ANSI / IEEE C57 12.28
Transformer Feed Type: N/A	Complies with ANSI / IEEE C57 12.29
Operation: Step-Down Operation (Approved for Step-Up)	Complies with ANSI / IEEE C57 12.34
Phase: Three Phase	Complies with ANSI / IEEE C57 12.35
Capacity (w/o Fans): 90 MVA (90,000 KVA)	Complies with ANSI / IEEE C57.12.70
Capacity (w/ Fans, Stage 1): 120 MVA (120,000 KVA)	Complies with ANSI / IEEE C57.12.106
Capacity (w/ Fans, Stage 2): 150 MVA (150,000 KVA)	Complies with ANSI / IEEE C57.12.110
Vector Group: DYN1	Complies with ANSI / IEEE C57.12.131
Primary Voltage: 138000V	Complies with ANSI / IEEE C57.91
Primary Voltage Switch: N/A	Complies with ANSI / IEEE C62.11
Primary Voltage Class: 145 kV Class	Complies with ANSI / IEEE C62.22
Primary Phasor: Delta	Complies with ANSI / IEEE 386
Primary BIL: 650 KV	Complies with ANSI / IEEE C2
Secondary Voltage: 34500Y/19920	Complies with ANSI / IEEE C37.47
Secondary Voltage Class: 38 kV Class	Complies with ANSI / IEEE 693
Secondary Phasor: Grounded Wye	
Secondary BIL: 200 KV	
Tertiary winding: N/A	
Frequency: 60 Hz	
Temperature Rise: 65°C Top Oil, 15°C Hot Spot, 40°C Ambient	
Insulation Rating: 110°C Insulation	
Cooling Class: ONAN/ONAF/ONAF	

Forced Air (Fans): Included, Two-Stages, Totally Enclosed, Individually Protected Type, Fan Blades Of One-Piece Cast aluminum, Galvanized Fan Guards. w/ Automatic - Off - Manual operation for cooling control
Cooling Radiator: Included, Interchangeable, Has Upper And Lower Drain Plugs, ANSI #70 Sky Grey
H V Tap Changer: 5-Position No Load Tap Changer (NLTC)
H V Tap Qty: (2) FCAN Above Taps, (2) FCBN Below Taps
H V Tap %: 2.5%
H V Tap Changer Switch Rating: 144kV
H.V Tap Changer Switch Location: H.V Side, Side Mounted
L.V Tap Changer: 33-Position ON-Load Tap Changer (OLTC), HUAMING, Capable Of Interface With SCADA For Position And Control, minimum 500,000 operation, <25 year design life
L.V Tap Qty: (16) FCAN Above Taps, (16) FCBN Below Taps
L.V. Tap %: 10%
L.V Tap Changer Switch Rating: 35 KV
L.V Tap Changer Switch Location: L.V Side, Top Mounted In a Separate Oil Compartment Equipped With: Magnetic level indicator with form "C" alarm contacts, Breather, Drain, filter and sampling valves, Hinged maintenance door with oil-resistant gasket, Manhole for inspection of contacts without lowering oil level, Liquid temperature indicator with form "C" alarm contacts. These indicators have minimum 6" diameter dials, Cover-mounted mechanical pressure relief device with (automatic resealing operation, form "C" alarm contacts & Mechanical signal for indication of device operation), Pressure control switch with trip contacts, Filling plug located at the top of the compartment, a lip to prevent oil spills after draining compartment and open the door, motor drive which is easily accessible and not immersed in oil, Local position indicator, Operation counter. Includes Automatic, Digital Control, high limit/low blocking, line drop compensation, SCADA ready, with COM1 port, RS232 w/ RS-485 and fiber optic interfaces; DNP3.0 protocol, COM2 port, RS232, preferred manufacturer, Beckwith M-2001D or equal
Impedance (Typical): 9.5% @ 90 MVA
Primary Connection Type: Exposed/Live Front Connection, Porcelain Insulator w/ threaded stud type silver plated, Sky Gray (ANSI 70) w/ provision for power factor testing, Oil-filled condenser type, Removable stud to pad connectors
Primary Termination Arrangement: Inline, Top Mounted in ANSI Segment 3
Primary Termination: NEMA 4-Hole Pad connectors
Primary Bushing Qty: (3)
Primary Bushing Rating: 144 KV Class, 650 kV BIL, 1200A, Porcelain, ANSI #70 Sky Grey, with threaded stud type silver plated, oil-filled condenser type, NEMA 4-hole Pads, 91.3" Creepage Distance
Primary Neutral Connection: N/A
Primary Surge Arrestors: Included, (3) metal-oxide station type, ANSI #70 Sky Grey
Primary Surge Arrestor Voltage Rating: 132 KV
Primary Surge Arrestor MCOV Rating: 106 KV
Primary Over Current Protection (OCP): N/A
Primary Bushing CT: Included, (3) Per Each Phase, 1200:5 Multi Ratio (1200:5, 1000:5, 900:5, 800:5, 600:5, 500:5, 400:5, 300:5, 200:5, 100:5), C800 Accuracy Class, 5-Lead, 2.0 Thermal Rating Factor, Tap shall exit the tank through cast resin barrier block and terminated on CT shorting blocks in the control cabinet
Primary Over Current Protection Holder: N/A
Primary Grounding Provisions: Two copper faced ground pad (stainless steel) located at diagonal corners near base, w/ two-bolt terminal connectors,
Secondary Connection Type: Exposed/Live Front Connection, Porcelain Insulator w/ threaded stud type silver plated, Sky Gray (ANSI 70) w/ provision for power factor testing, Oil-filled condenser type, Removable stud to pad connectors,
Secondary Termination Arrangement: Inline, Top Mounted
Secondary Termination: NEMA 4-Hole Pad connectors
Secondary Bushing Qty: (4)
Secondary Bushing Rating: 34.5 KV Class, 200 kV BIL, 3000 A, Porcelain, ANSI #70 Sky Grey, with threaded stud type silver plated, oil-filled condenser type, 43.5" Creepage Distance
Secondary Neutral Connection: Included, 20 KV Class, 200 kV BIL, 3000 A, Porcelain, ANSI #70 Sky Grey, with threaded stud type silver plated, oil-filled

Features
Penta-head Bolt Entry Assembly
High-Fire Point Insulating Fluid
Non-PCB Insulating Fluid
Tamper Proof Housing
Hinged Front Compartment Doors, Pad Lockable
NEMA 3R Wiring Compartment

Efficiency %: N/A

Based on transformer operating at 50% of nameplate base kVA.

Load Losses Based on 75°C Reference Temp.
Off-Load Loss (in watts): 87kW
On-Load Loss (in watts): 650kW

Total Load Loss (in watts) at 100%: 737kW

**Guaranteed max losses*

condenser type, 25" Creepage Distance
Secondary Over Current Protection (OCP): N/A
Secondary Bushing CT: Included, (2) Per Each Phase, 3000:5 Multi Ratio (3000:5, 2500:5, 2200:5, 2000:5, 1500:5, 1200:5, 1000:5, 800:5, 500:5, 300:5), C800 Accuracy Class, 5-Lead, 2.0 Thermal Rating Factor
Secondary Surge Arrestors: Included, (3) metal-oxide station type, ANSI #70 Sky Grey
Secondary Surge Arrestor Voltage Rating: 27 KV
Secondary Surge Arrestor MCOV Rating: 22 KV
Secondary Grounding Provisions: Included, (2) Grounding Pads (stainless steel) Located On Diagonally Opposite Corners Of The Tank Base For Grounding Of The Transformer With Bolt Type Connectors For Connection To 2/0 to 500 KCMIL Stranded Copper conductor
Secondary Neutral Bushing CT: Included, (1) 1200:5 Ratio MR, C800 Accuracy Class, 5-Lead, 2.0 Thermal Rating Factor
Metering Current Transformer (CT): N/A

Annunciator Panel: Included, GDEPRI T651-ANN complete package;24 alarm inputs, 1ms SOE, DNP3/Modbus/IEC 61850. Customer 125 VDC supply remains unchanged; isolated 125 VDC-to-24/48 VDC converter and 125 VDC I/O interface included.

Auxiliary Control Panel : Included, 120 Vac single-phase for fans, space heaters and other accessories, 125 volts dc for control functions, w/ 120V 100W light fixture w/ SPST switch and 120V, 20A 1P duplex grounding type receptacle w/ protective fuses
Load Break Switch: N/A
Load Break Switch Qty: N/A
Load Break Switch Rating: N/A
Load Break Switch Location: N/A
Efficiency Standard(s): Meets ANSI/IEEE Standards
K-Factor Rating (Harmonic Mitigation): K-1 (Standard)
Pulse Drive Rating: N/A

Insulation Fluid: 10 C Mineral Oil Fluid - Non-PCB Fluid

Fluid (Oil) Capacity*: TBD
Fluid (Oil) Weight*: 59370.49 lbs
Transformer Monitoring: Included, Qualitrol Transformer Monitoring System (QTMS) - Load and Thermal Monitor,
Oil Level Indicator: Included, with low level alarm and critical low level trip contacts, 125 vdc alarm contacts
Winding Temperature Indicator: Included Thermometer, 120 C hot spot monitoring, 65 degree C over 40 degree C ambient
RTD: Included, for Ambient Air, Top Oil and Bottom Oil, Qualitrol Model 103-047 or equivalent
Oil Temperature Indicator: Included Thermometer,Maximum top oil 105 degree , 65 degree C over 40 degree C ambient
Pressure/Vacuum Indicator: Included, With Scale Range Of Plus Or Minus 10 PSI
Sudden Pressure Relay: Included, Deguang SYJ9-80, low temperature package factory customized to -45°C mimimum. Quallitrol 909-300-01 seal-in retained; 125 V DC alarm, trip/lockout, manual reset and SCADA interface provided
Buchholz Relay: Included, with alarm and trip contacts
Tank Pressure Relief Relay: Included, visual signal flag and 125 vdc alarm contacts
Fan Undervoltage Monitoring: Included, 27P, 27B
On-line Dissolved Gas Analysis Monitor: Included, with valves Serveron (TM8) multi-gas monitoring system
Gas Sampler Valve: N/A
Fill Valve: Included, with vacuum filling
Fill Valve Location: Top Mounted
Drain Valve: Included W/ Sampling Port, with vacuum drying
Drain Valve Location: Side of transformer tank
Winding Material: Copper

Labeling:

Nameplate - ANSI C57.12.00 Table 7 Data, Supplier Name, Factory Location

Stenciling:

Externally Stenciled (Painted) KVA Rating
Externally Stenciled (Painted) Voltage Rating
Externally Stenciled (Painted) CG Marking

Labels:

External Non-PCB Label
External Warning & Danger Label
External Barcode Label
Internal Busing & Accessory Labeling

Factory Tests:

Winding Resistance Test, Transformer Turns Ratio Test
Short-circuit Impedance Test (will not result in an impedance change exceeding 2% of the impedance value measured prior to short circuit testing)
Insulation Resistance Test
Voltage Ratio, Polarity Error Test
Load Loss (Wattage) Test
Separate Source Voltage Withstand Test
Induced Voltage Withstand Test
No-load Loss (Wattage) Test
Pressure Integrity Test

Special Tests:

Temperature Rise Test
Insulation Power Factor Test - winding to winding & winding to ground
Lightning Impulse Test
Sound Level Test

Shipping:

Shipped on pallet on open flatbed
Palletized on Wooden Pallet w/ Skid Pockets

Ambient Temperature Rating: 40°C

Ambient Operating Temperature Range: -40°C to +40°C


Isokeraunic Level : 50 thunderstorm - days/year
Wind Velocity: 120 MPH
Sound Level: Complies with C57.12.90, <= 65dB
Elevation (Altitude): 800ft (244 meters) Above Sea Level
Core Material: Silicon Steel Laminations, Grain Oriented, cold-rolled, non-aging, Round Core/Coil Design
Tank Material: Coated Steel
Cabinet Material: Coated Steel
Base Platform Material: Coated Steel
Hardware Material: Stainless Steel
Portability: Lifting lugs, provisions for jacking under base, w/ base construction suitable for pad foundation
Housing Type: Metal Casing Liquid Filled Transformer, Full vacuum and positive pressure applied at the cover at least 10 psig, 2 round manhole covers with 24" Diameter
Enclosure Rating: NEMA 4X Weatherproof, min 24" above the base top of the cabinet less than or equal to 78"
Seismic Rating: High seismic, According to IEEE-693 & IEEE C57.114
Paint Type: Applied corrosion-resisting primer to all surfaces, Applied top coat baked enamel to provide a minimum of 3 mils (.75 mm) thick, The top of the main tank and LTC compartment is a non-skid coating, Radiator is electrostatic coated
Finish Color: Dark Grey
Mounting: Supporting Structures
Conduit Opening: Bottom
Tank Cover Access Handhole: Included
Dimensions*: 354.33" x 255.91" x 275.59"
Weight*: 302033 lbs
*Please note that numbers are approximate and subject to change


Pallet Skid Facing Outward Sides of Truck
Note: *Crated shipping in lieu of palletizing can be done upon request for an additional fee*


Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-765-7664
E-mail: sales@larsonelectronics.com

// NOTE //

1. DIMENSION TOLERANCE : ± 5%.
2. ALL DIMENSIONS ARE IN INCHES.
3. DIMENSION AND WEIGHT WILL BE CHANGED SLIGHTLY AFTER DETAIL DESIGN.
4. THE COVER IS FASTENED WITH BOLTS.
5. ANSI C57.12.00
6. IEEE C57 series
7. Sound level ≤ 65 dB

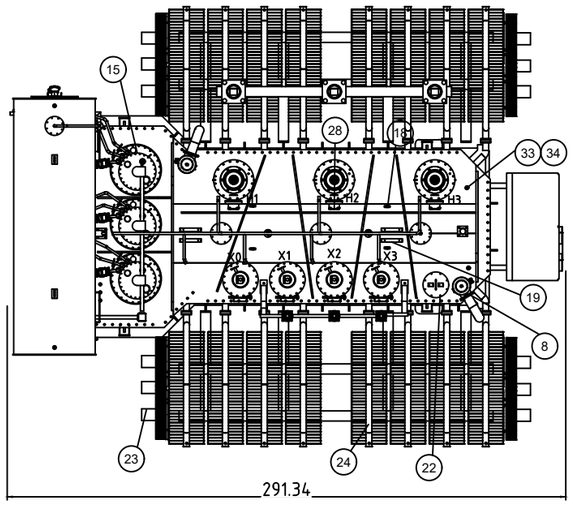


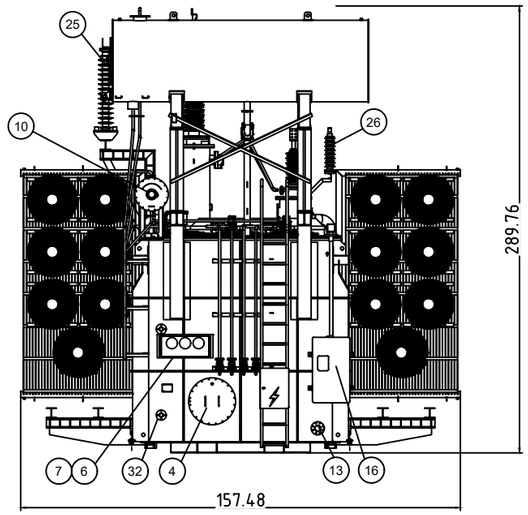


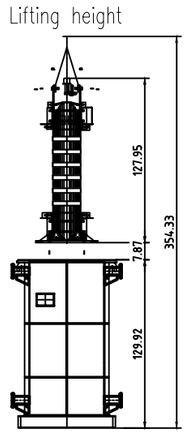



List of accessories

No.	Name	Model	Qty
01	HV bushings	CSEMX-145/800	3
02	Off load tap changer, 5 Position (±2.5%)	XTMJ-3-500/138-8Y7R	
03	LV& LVN bushings	CZX-40.5/3150	4
04	Manhole	-	2
05	Control box, NEMA 4X	Outdoor type	1
06	Winding temperature indicator	US8222T-22644914	2
07	Oil temperature indicator	US8222T-22644913	1
08	Pressure release valve	YQSE22-22453409	2
09	Oil level gauge for main conservator	MMH264-22446501	1
10	Oil level gauge for OLTC conservator	ZAG4-140	1
11	Breather for main conservator	NY3-5	1
12	Breather for OLTC conservator	NY3-0.5	1
13	Brass round flange ball valve	EO100	1
14	Brass round flange ball valve	EO25	4
15	On load tap changer, 33 position (±10%)	SYTIAWHJ-3600/72.5C-18353W	1
16	Motor drive unit	DNB9	1
17	Gas relay	RK1-80A	1
18	Buchholz Relay		
19	Impact Recorder	IM500	2
20	Sudden Pressure Relay	TZK1-80	1
21	Conservator with rubber bag		1
22	Ground bushings	CG-3/315S	2
23	Fan	E882	24
24	Dispersed radiator		16
25	HV SURGE ARRESTER	Z132X-180	3
26	LV SURGE ARRESTER	Z132X-30	3
27	Grouding pad		7
28	CT terminal box	-	6
29	HV SURGE ARRESTER grounding cable	-	1
30	LV SURGE ARRESTER grounding cable	-	1
31	X0 bushing grounding cable	-	1
32	DGA	UN0	1
33	RTD	325-269	1
34	RTD	325-245	1

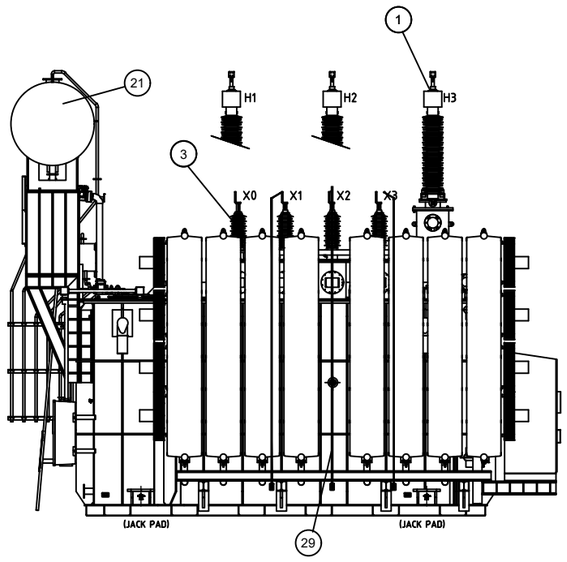

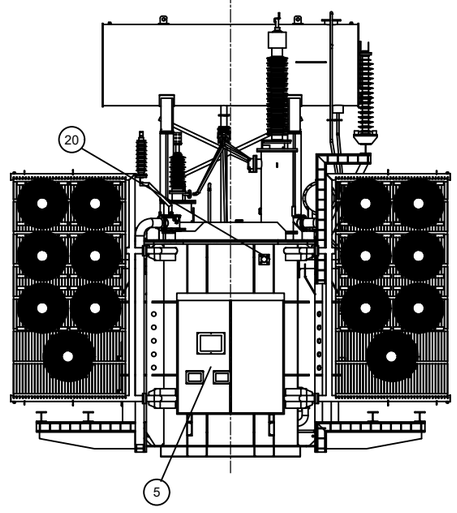

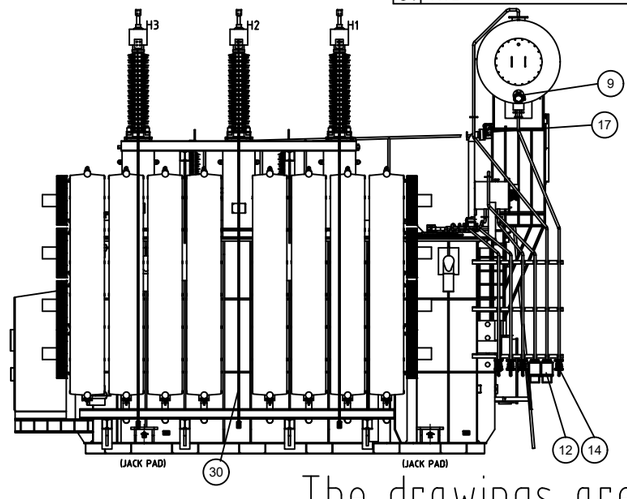



The drawings are for reference only

Designation	Weight
Oil weight	(59370.49 lb)
Total weight	(277694.27 lb)
Transport weight(without oil)	(165633.3 kg)

08		
07		
06	Rated Power	90/120/150MVA
05	Vector Group	Dyn1
04	Cooling method	ONAN/ONAF1/ONAF2
03	short circuit impedance	U(HV-LV)=9.5%
02	Frequency	60Hz
01	Model and voltage regulation range	

NO.	DATE	DESCRIPTION of REVISION
	2026.5.14	
DESIGNED		YW
CHECKED		RD
APPROVED		RB

MT-PSTC-R7-3P-DXK-90MVA-GMA-HT-LT-X6-BMFF-CZ-2ZZ-M3

LARSON MAGNETICS

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs