Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU

30 kVA Explosion Proof Transformer - C1D2 - 3PH - 575V Delta Primary, 480Y/277 Wye-N Secondary - Encapsulated/Copper Windings - NEMA 3R

Product ID: 337865

Image: ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU Explosion Proof Transformer

Unit Type: Encapsulated Explosion Proof Transformer
Dimensions: -
Phase: Three Phase
Capacity: 30 KVA
Primary Voltage: 575V Delta
Secondary Voltage: 480Y/277 Wye-N
Frequency: 60 Hz
Primary/Secondary Configuration: Two Winding
Winding Material: Copper
Termination: Lead Wires
Electrostatically Shielded: Yes
Temp Rise/Insulation: 115°C/180°C
Sound Level: Meets NEMA ST-20 Standards
Enclosure Material: Cast Aluminum
Input/Output Hubs: 3/4" NPT Input and 3/4" NPT Output Hubs
Mounting: Surface
Weight: -

Ratings/Approvals

Class I, Division 2, Groups C & D
CSA Approved
NRTL Listed for United States and Canada
NEMA 3R

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU by Larson Electronics is an Explosion Proof Transformer for use in Class I, Division 2 hazardous locations. Suitable for both indoor and outdoor applications, the ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU provides increased reliability, protection against critical equipment failures and an extra

level of protection by isolating the power source from the connected device.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: With a transformer rating of 30 kVA, the ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU is a three phase unit with a primary voltage of 575 V Delta. It also provides a secondary voltage of 480Y/277 V Wye-N. The transformer contains a two-winding primary and secondary configuration and reversible connections, as well as electrostatically shielded components and wire leads connection. Featuring robust construction, the enclosure is made out of cast aluminum.

The encapsulated explosion proof transformer for Class I, Division 2 areas comes with a NEMA 3R rating, which offers watertight protection and corrosion resistance. The following input/output hubs can be found on this unit: 3/4" NPT (input) and 3/4" NPT (output).

The ETX-FP-3P-575D-30KVA-480Y.277-N3R-CU may be mounted on compatible surfaces in Class I Division 2 environments. This transformer provides owners with significant energy savings as well as offering environmental benefits. Higher efficiency not only extends the life of the transformer, but also turns into cost savings for owners in the form of lower energy bills and decreased cost of ownership.

Applications: Chemical processing plants, oil refineries, wastewater facilities and other classified industrial facilities that adheres to the ratings of this unit.

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

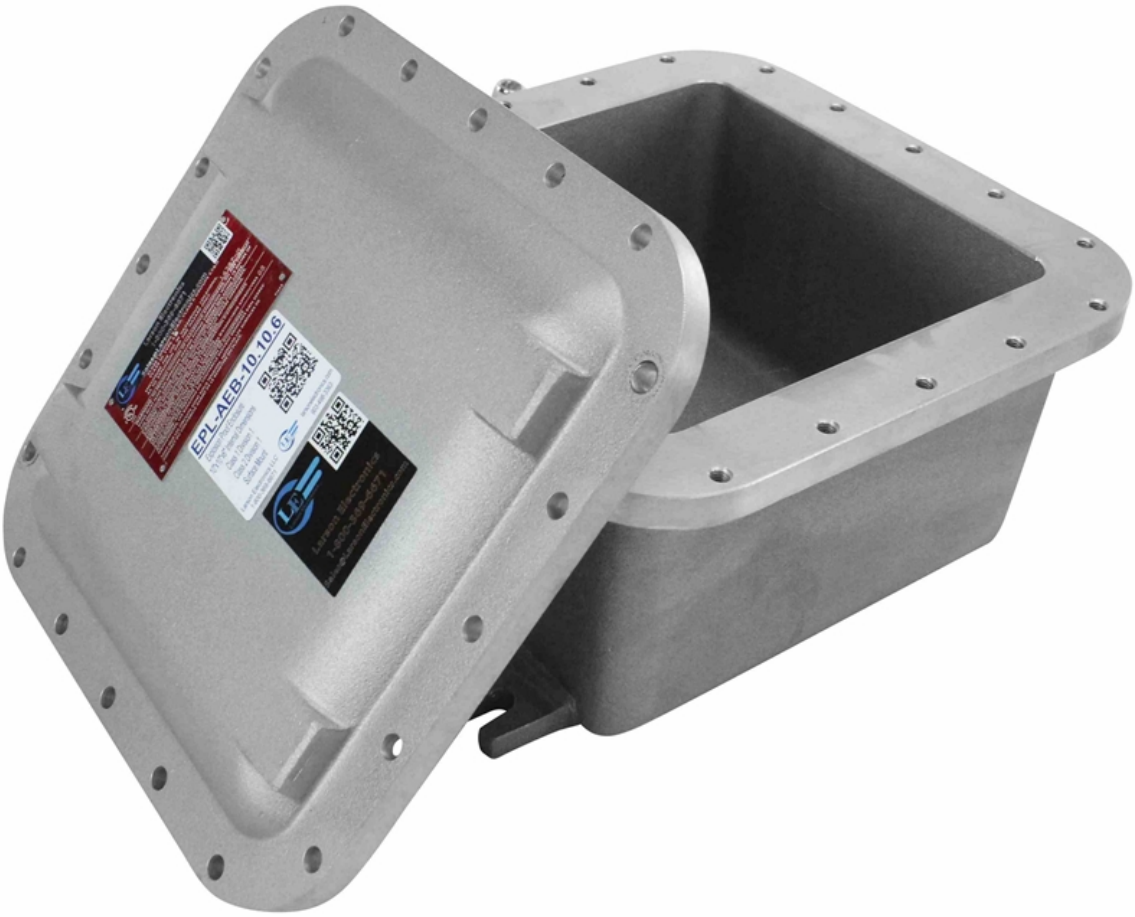

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs