

EYD-29

Conduit Sealing Fitting - C1D1&2 Groups C, D - C2D1&2 Groups F, G - Class III - 3/4" NPT

Product ID: 339157



Image: EYD-29

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EYD-29 Sealing Fitting

Listing: NRTL Listed for United States and Canada

Unit Type: Explosion Proof Sealing Fitting

Dimensions: 3-11/16" x 1-3/4"

Weight: -

Vertical Turning Radius: 1-7/8"

Internal Volume: 1-3/4 cu in

Installation Position: Vertical Only

Materials: Feraloy Iron Alloy and/or Ductile Iron Body

Finish: Electrogalvanized with Aluminum Acrylic Paint

Hub Size: 3/4" NPT (Female Hub, Elbow Seal)

Sealing Compound Requirement: Approved Only When Used with Chico X Fiber and Chico A Compound or Chico SpeedSeal

Ratings

Class I, Division 1 & 2, Groups C, D

Class II, Divisions 1 & 2, Groups F, G

Class III

UL 1203; CSA C22.2

Special Orders - Special Requirements

Contact us for special requirements

Intl: 1-903-270-1187

Toll Free: 1-800-369-6671

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

The EYD-29 from Larson Electronics is an Explosion Proof Sealing Fitting that provides tight and secure electrical installations in combustible sites and industrial facilities. Constructed of feraloy iron alloy, this seal fitting is designed to be installed on 3/4" NPT rigid conduit to provide a seal between wiring connections.

The EYD-29 ensures tight seals and prevents the passage of combustible substances in electrical systems installed in flammable environments. This seal fitting is designed to be installed on 3/4" NPT rigid conduit. Constructed of feraloy iron alloy with a galvanized paint finish, the explosion proof sealing fitting is suitable for use in Class I, Division 1 & 2, Groups C,

D, Class II, Divisions 1 & 2, Groups F, G, and Class III hazardous environments.

The EYD-29 explosion proof seal off is used to make a junction between an explosion proof equipment and rigid pipe. Typically used between light fixtures, device boxes, junction boxes, or operator boxes. Users will make their connections, keep the conductors separate and pour chiko into the seal off. The chiko compound and chiko fiber is sold separately and NOT included with this unit.

This seal off is approved for use with C1D1 Groups C & D switch and operator device boxes.

At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664




Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



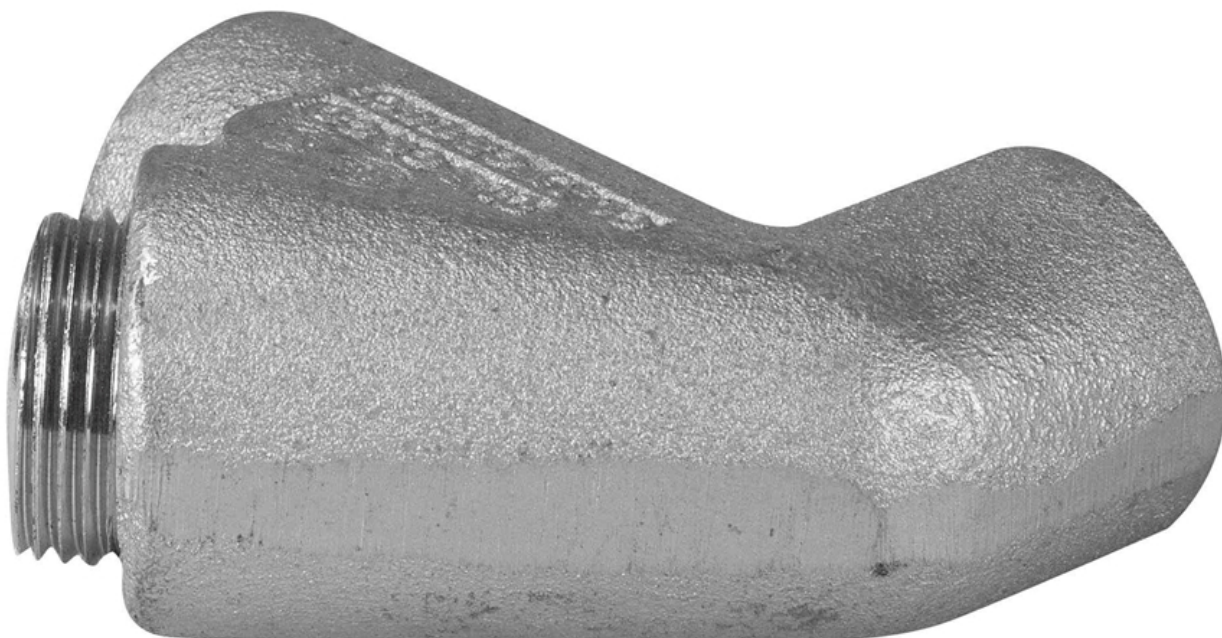





Frequently Asked Questions (FAQ)

There are no Faqs