

MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6-4.C04-M1

200A Rack Mount Power Distribution, 120/240V 1PH, (4) CS6369 Outlets, (1 Set) 400A Single-pole 16-Ser. Male Camlock Line-In Receptacles, (1 Set) 400A Single-pole 16-Ser. Female Camlock Line-Out Receptacles, NEMA 3R

Product ID: 339397



Image: MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6-4.C04-M1

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6-4.C04-M1 Rack Mount Power Distribution

Line-In: (1 Set) 400A Single-pole 16-Ser. Male Camlock Receptacles [Green, Black, Red, White] [600V] w/ Flip Covers

Line-Out: (1 Set) 400A Single-pole 16-Ser. Female Camlock Receptacles [Green, Black, Red, White] [600V] w/ Flip Covers

Primary Voltage (V): 120/240V AC

Primary Phase (PH): 1-Phase (1PH)

Primary Frequency (HZ): 60 Hz (60-cycles)

Primary Panel: 120/240V 1PH 200A MCCB N3R w/ Power Indicators & Meter

Primary Breaker(s): (4) 50A 2P MCB [250V]

Primary Outlet(s): (4) CS6369 California-Style Twist-Lock Receptacle [120/240V]

Primary Protection: MCCB Circuit Breaker; MCB Circuit Breakers; Weatherproof Covers; Power Indicators & Meter

Transformer: N/A

Secondary Voltage: N/A

Secondary Phase (PH): N/A

Secondary Frequency (HZ): N/A

Secondary Panel: N/A

Secondary Breaker(s): N/A

Secondary Outlet(s): N/A

Secondary Protection: N/A

Form Factor: 13" Rack mount ATA Case, Shock Mount 8RU ATA Cube w/ (2) Swivel & (2) Locking Casters

Frame Materials: -

Dimensions: TBD

Ratings

Max Primary OCP: 200A @ 240V

Max Secondary Output: N/A

Certified for United States & Canada
NRTL Listed to UL 1640

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-765-7664

Weight: TBD

Larson Electronics manufactures a wide variety of custom power distribution systems. The pictures displayed for this unit are a general representation of form factor and may not accurately represent this exact configuration in every detail due to being custom builds. The specifics for this configuration are listed in the specification table and one-line diagram.

E-mail: sales@larsonelectronics.com

All grounding shall comply with state and local codes and meet the minimum requirements of the National Electronic Code section 250

Made in Texas

The MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6-4.C04-M1 from Larson Electronics is a Rack Mount Power Distribution that is a portable power solution designed for stages, movie sets, concerts, and entertainment sites. This mobile power distribution unit provides operators the ability to safely tap into and distribute single-phase 120/240V AC power from a variety of sources, including generators and direct grid power, found in motion picture production.

****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS****

Operation:

- Primary Voltage: 120/240V AC 1PH
- Primary Panel: 120/240V 1PH 200A MCCB N3R w/ Power Indicators & Meter
- Primary Breaker(s): (4) 50A 2P MCB [250V]
- Primary Outlet(s): (4) CS6369 California-Style Twist-Lock Receptacle [120/240V]
- Transformer: N/A
- Secondary Voltage: N/A
- Secondary Panel: N/A
- Secondary Breaker(s): N/A
- Secondary Outlet(s): N/A

*See specification table at the top of the page for more information about the power distribution system.

Portable Power Distribution Purpose and Use: The MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6-4.C04-M1 portable power distribution system gives operators the ability to power their 120/240V volt equipment from a single system within live recording and entertainment venues. On the primary side, operators connect single-phase 120/240V AC line-in power using one set of 400A single-pole 16-series male camlock receptacles (green, black, red, white). The primary side also contains one set of 400A single-pole 16-series female camlock receptacles (green, black, red, white) for line-out connections and four CS6369 50-amp twist-lock outlets for 120/240V AC equipment.

Protective Construction: All components are secured inside a compact 8RU rack mount ATA case. This black case features side-located handles for mobility around the production or

recording site. Four casters (two swivel and two locking) are available at the bottom of the power distribution unit, which allows operators to move the station easily without lifting. Dual locking casters ensure stable use and safe storage when being transferred in trucks or other large vehicles. This durable case is resistant to shock and takes on a standard design that is similar with professional recording equipment. It can withstand frequent handling around live stages and loading/unloading at outdoor locations.

Certification: All units are built in accordance to NFPA 70 (National Electric Code) and NRTL certified to UL 1640. All equipment is NEMA 3R rated for indoor and outdoor use and provide a degree of protection against dirt, water, and ice. NEMA 4 and NEMA 4X equipment can be equipped upon request.


Applications: This power distribution system is ideal for indoor or outdoor use and applications including but not limited to, movie sets, entertainment, television sets, stage lighting, studio recording, sporting events, rigging, audio and video production, concerts, and motion picture production. These power distribution systems are popularly used in applications where external power sources are often necessary. We also offer class rated transformers for use within explosion proof and hazardous location environments.

Custom Built Systems Available: Larson Electronics is a manufacturer and we can build portable power distribution systems to your specifications. Although we carry several models of portable power distribution systems in stock, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.


	8	7	6	5	4	3	2	1
	REV	DESCRIPTION						DATE
	A	QUOTE						07/05/2026
<div>MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1</div> <div></div>								
	8	7	6	5	4	3	2	1

MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6
-4.C04-M1



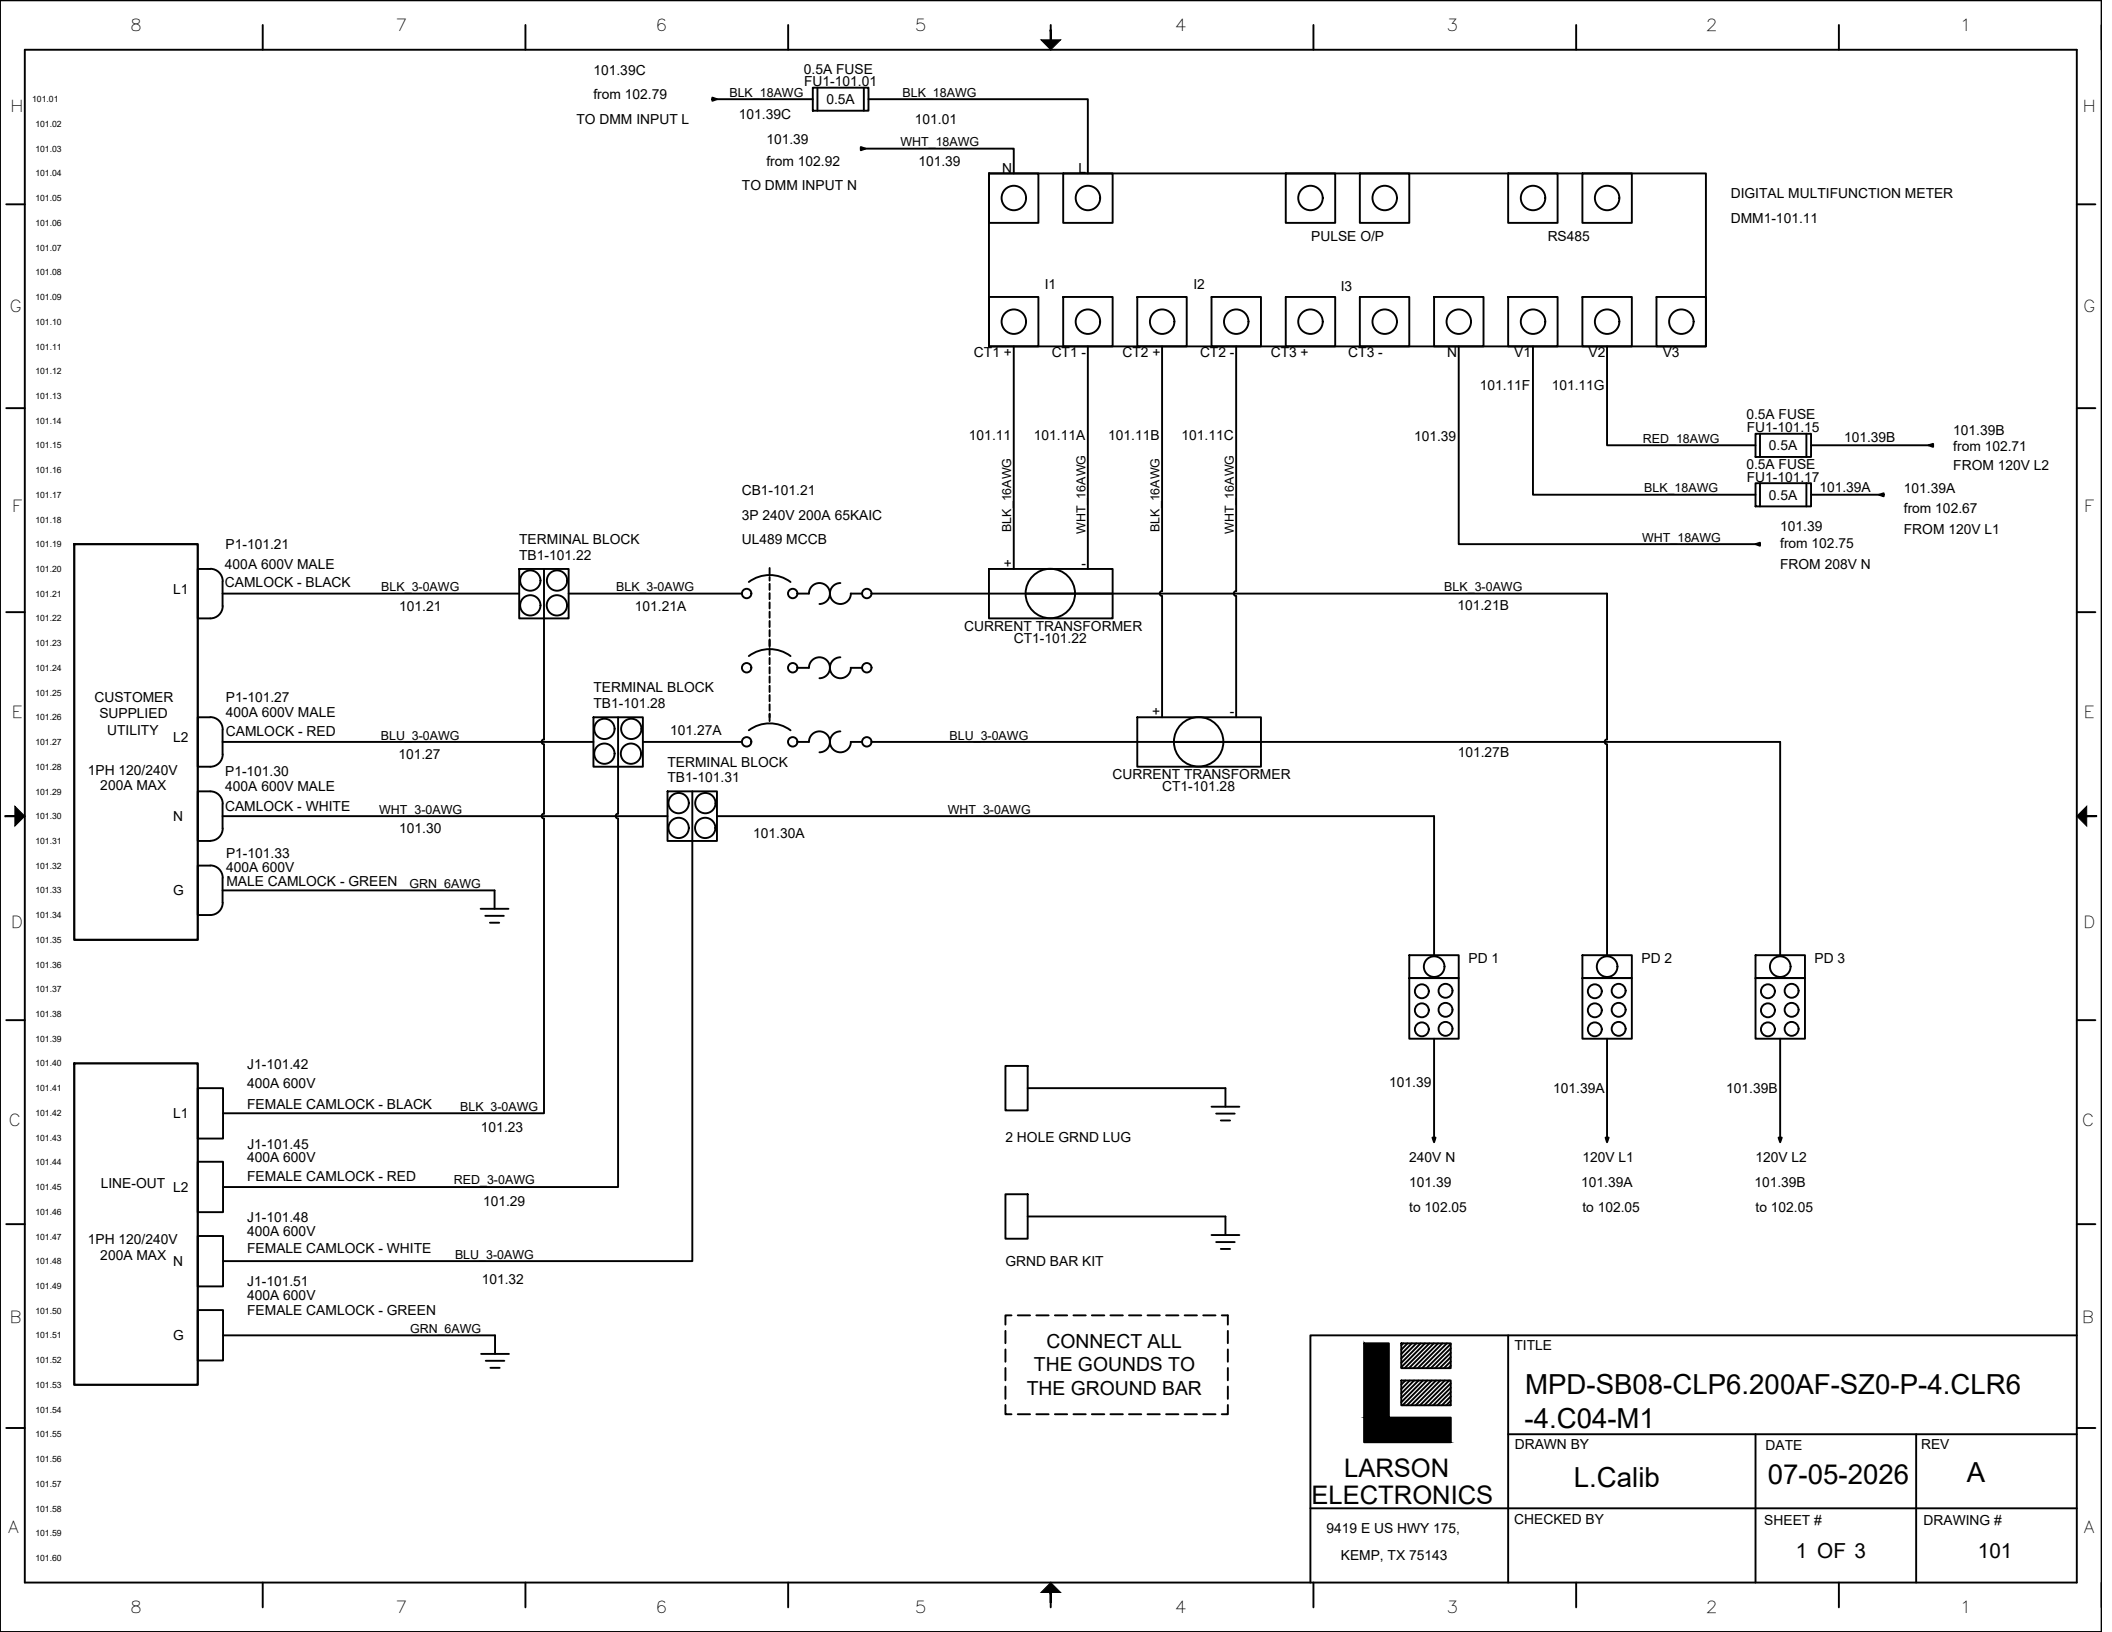

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1		
	DRAWN BY L.Calib	DATE 07-05-2026	REV A
	CHECKED BY	SHEET # 1 OF 3	DRAWING # 101

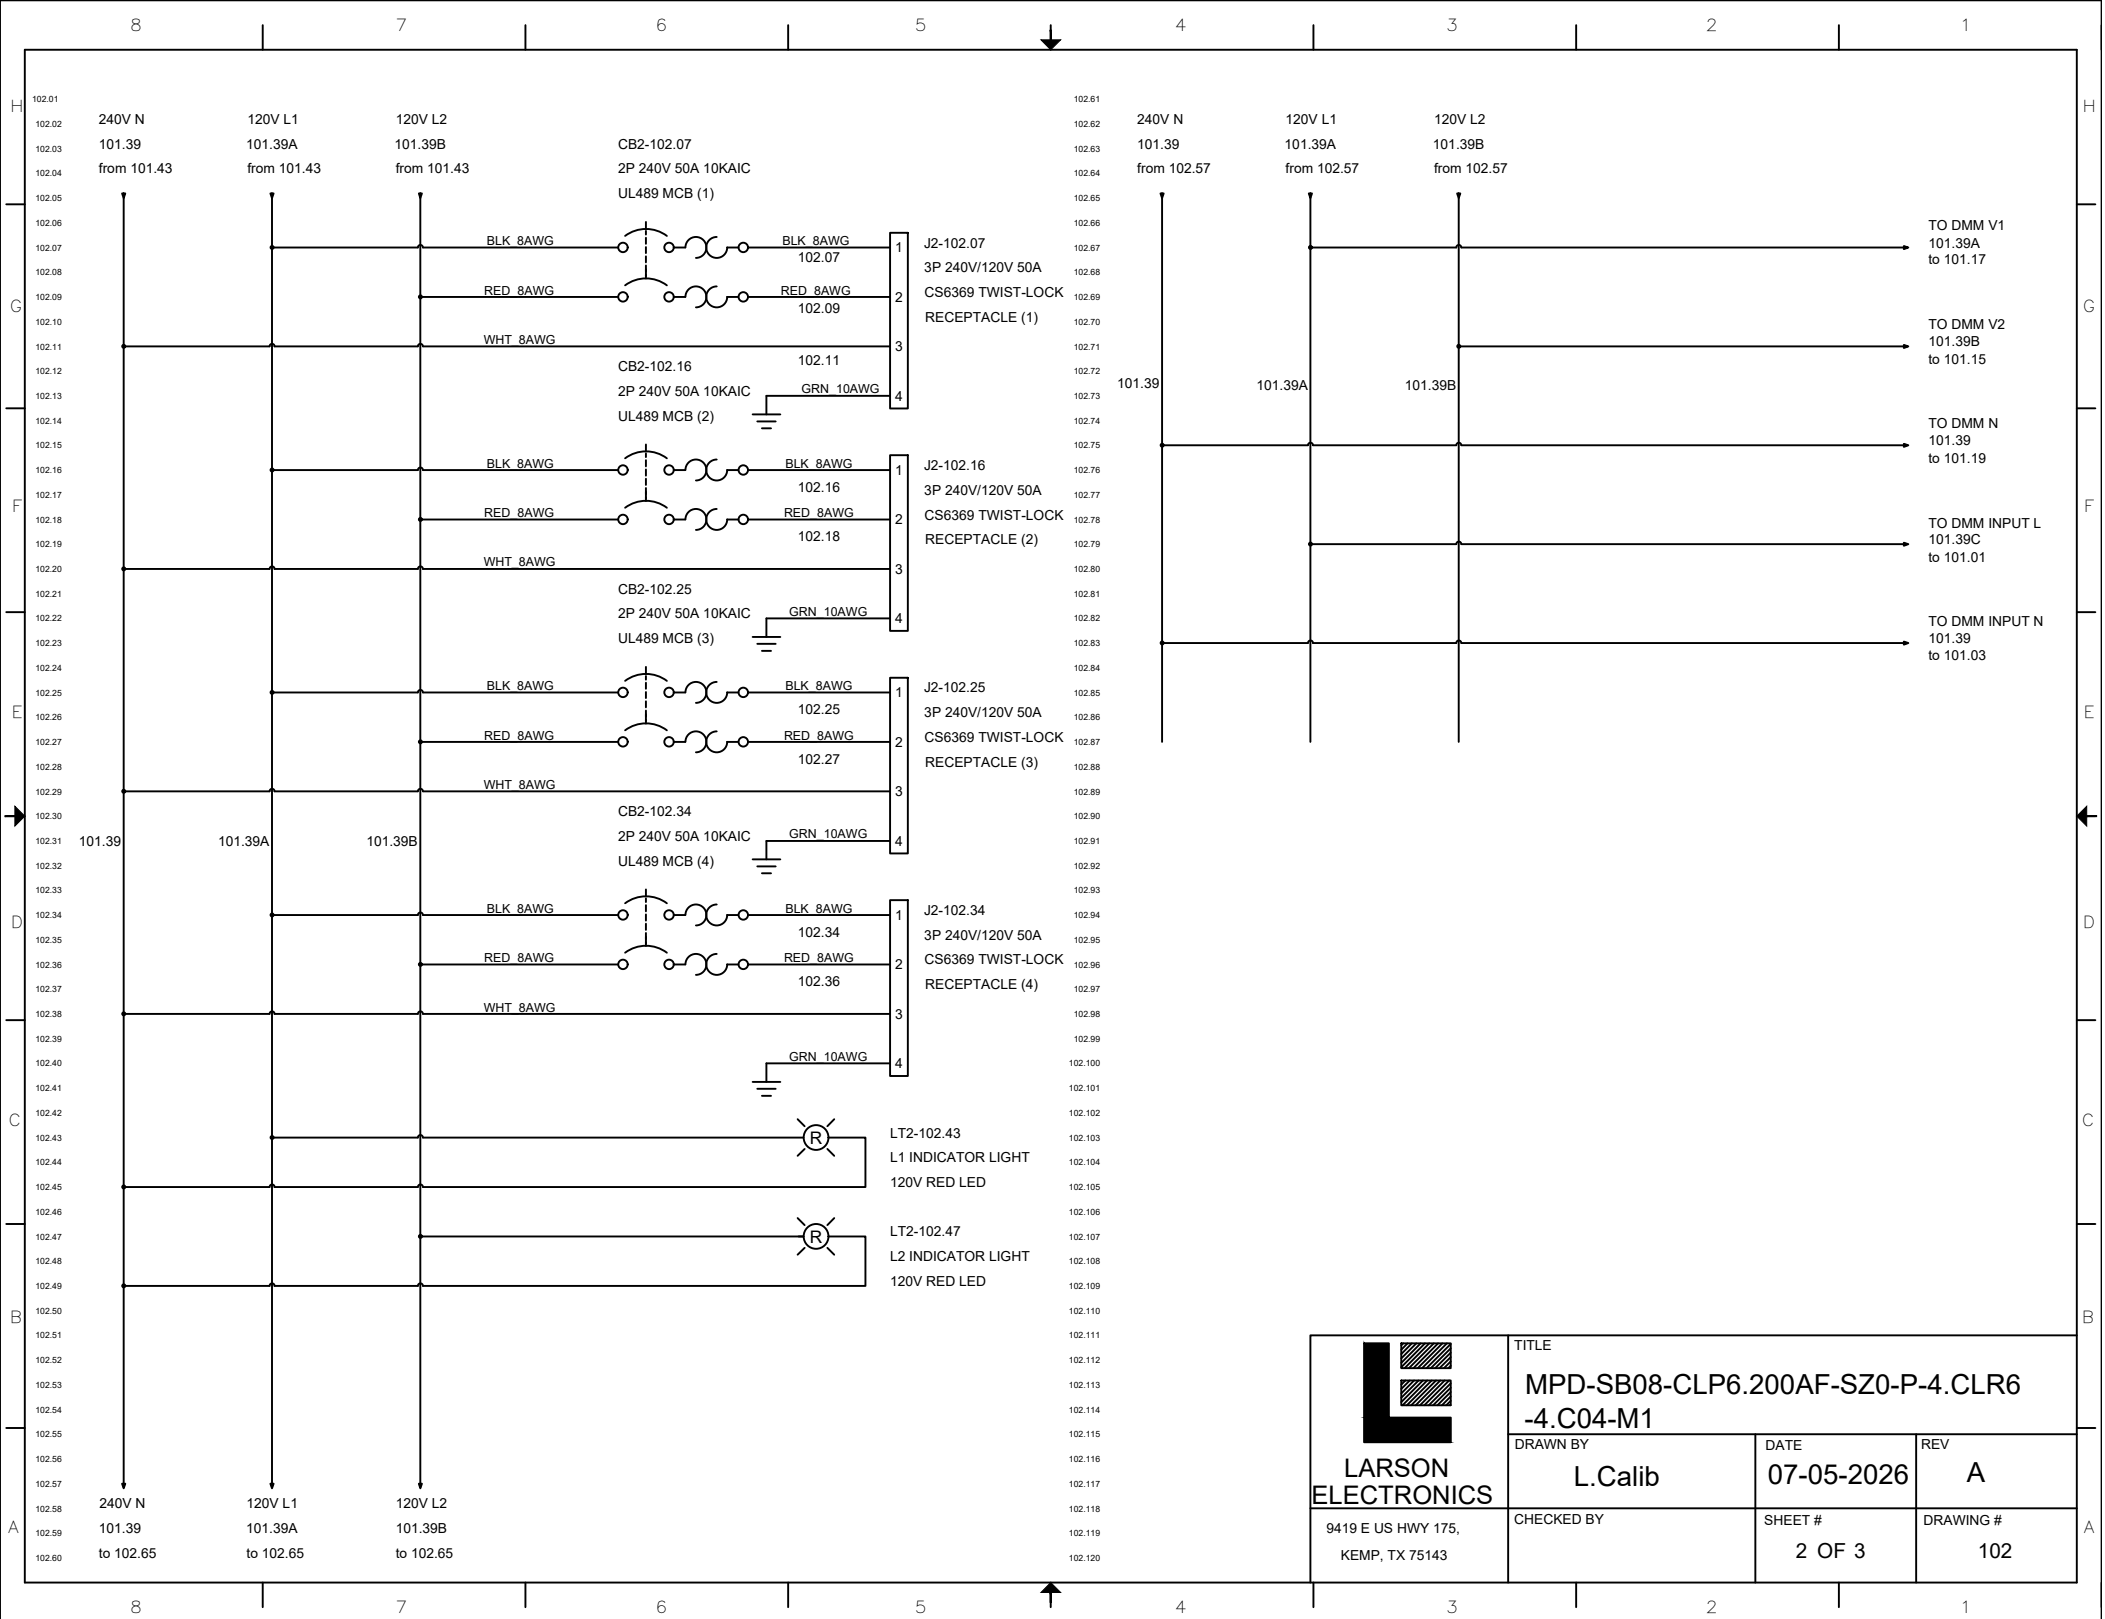


	8	7	6	5	4	3	2	1
103.01								
103.02								
103.03	J2-102.07	4	UNV00008818	CS6369 50A 250V 3P RECEPTACLE				
103.04	J2-102.16							
103.05	J2-102.25							
103.06	J2-102.34							
103.07	2 HOLE GRND LUG	1	UNV00007136	2 HOLE GROUND LUG				
103.08	P1-101.30	1	UNV00002290	600V 400A MALE CAM LOCK WHITE				
103.09	P1-101.21	1	UNV00008711	600V 400A MALE CAM LOCK BLACK				
103.10	P1-101.21	1	UNV00008711	600V 400A MALE CAM LOCK BLACK				
103.11	P1-101.33	1	UNV00008712	600V 400A CAM LOCK GREEN				
103.12	P1-101.33	1	UNV00008712	600V 400A CAM LOCK GREEN				
103.13	P1-101.27	1	UNV00008715	600V 400A MALE CAM LOCK RED				
103.14	J1-101.48	1	UNV00013752	600V UPTO 400A #2-4/0 AWG WHT FEMALE CAM LOCK RECEPTACLE				
103.15	J1-101.42	1	UNV00013753	600V UPTO 400A #2-4/0 AWG BLK FEMALE CAM LOCK RECEPTACLE				
103.16	J1-101.42	1	UNV00013753	600V UPTO 400A #2-4/0 AWG BLK FEMALE CAM LOCK RECEPTACLE				
103.17	J1-101.45	1	UNV00013755	600V UPTO 400A #2-4/0 AWG RED FEMALE CAM LOCK RECEPTACLE				
103.18	J1-101.51	1	UNV00013758	600V UPTO 400A #2-4/0 AWG GRN FEMALE CAM LOCK RECEPTACLE				
103.19	J1-101.51	1	UNV00013758	600V UPTO 400A #2-4/0 AWG GRN FEMALE CAM LOCK RECEPTACLE				
103.20	CB1-101.21	1	UNV00014726	3P 200A 240/480V MCCB				
103.21	CB2-102.07	4	UNV00014731	2P 250V 50A DIN RAIL MOUNT MCCB UL489				
103.22	CB2-102.16							
103.23	CB2-102.25							
103.24	CB2-102.34							
103.25	DMM1-101.11	1	UNV00016483	POWER METER, 1&3-PH, POSITIVE LCD, 100-240V				
103.26	DMM1-101.11	1	UNV00016483	POWER METER, 1&3-PH, POSITIVE LCD, 100-240V				
103.27	FU1-101.01	3	UNV00016473	0.5 Amp 250V Glass Fuse				
103.28	FU1-101.15							
103.29	FU1-101.17							
103.30	LT2-102.43	2	UNV00015469	125V RED INDICATOR LIGHT 1.5MA				
103.31	LT2-102.47							
103.32	TB1-101.22	3	UNV00016551	620A 4 HOLE TERNINAL BLOCK				
103.33	TB1-101.28							
103.34	TB1-101.31							
103.35	PD 1	3	UNV00016633	POWER DISTRIBUTION BLOCK 380A 1-6 OPENING				
103.36	PD 2							
103.37	PD 3							
103.38	GRND BAR KIT	1	UNV00013942C	GROUND BAR KIT				
103.39	GRND BAR KIT	1	UNV00013942C	GROUND BAR KIT				
103.40	CT1-101.22	2	UNV00021008	AC Current transformer, Solid core, 200A Pri -5A Secd 1.56in dia. M4x0.7				
103.41	CT1-101.28							
103.42								
103.43								
103.44								
103.45								
103.46								
103.47								
103.48								
103.49								
103.50								
103.51								
103.52								
103.53								
103.54								
103.55								
103.56								
103.57								
103.58								
103.59								
103.60								
	8	7	6	5	4	3	2	1


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1		
	DRAWN BY L.Calib	DATE 07-05-2026	REV A
	CHECKED BY	SHEET # 3 OF 3	DRAWING # 103

	8	7	6	5	4	3	2	1
	REV	DESCRIPTION						DATE
	A	QUOTE						07/05/2026
<div>MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1</div> <div></div>								
	8	7	6	5	4	3	2	1

MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6
-4.C04-M1



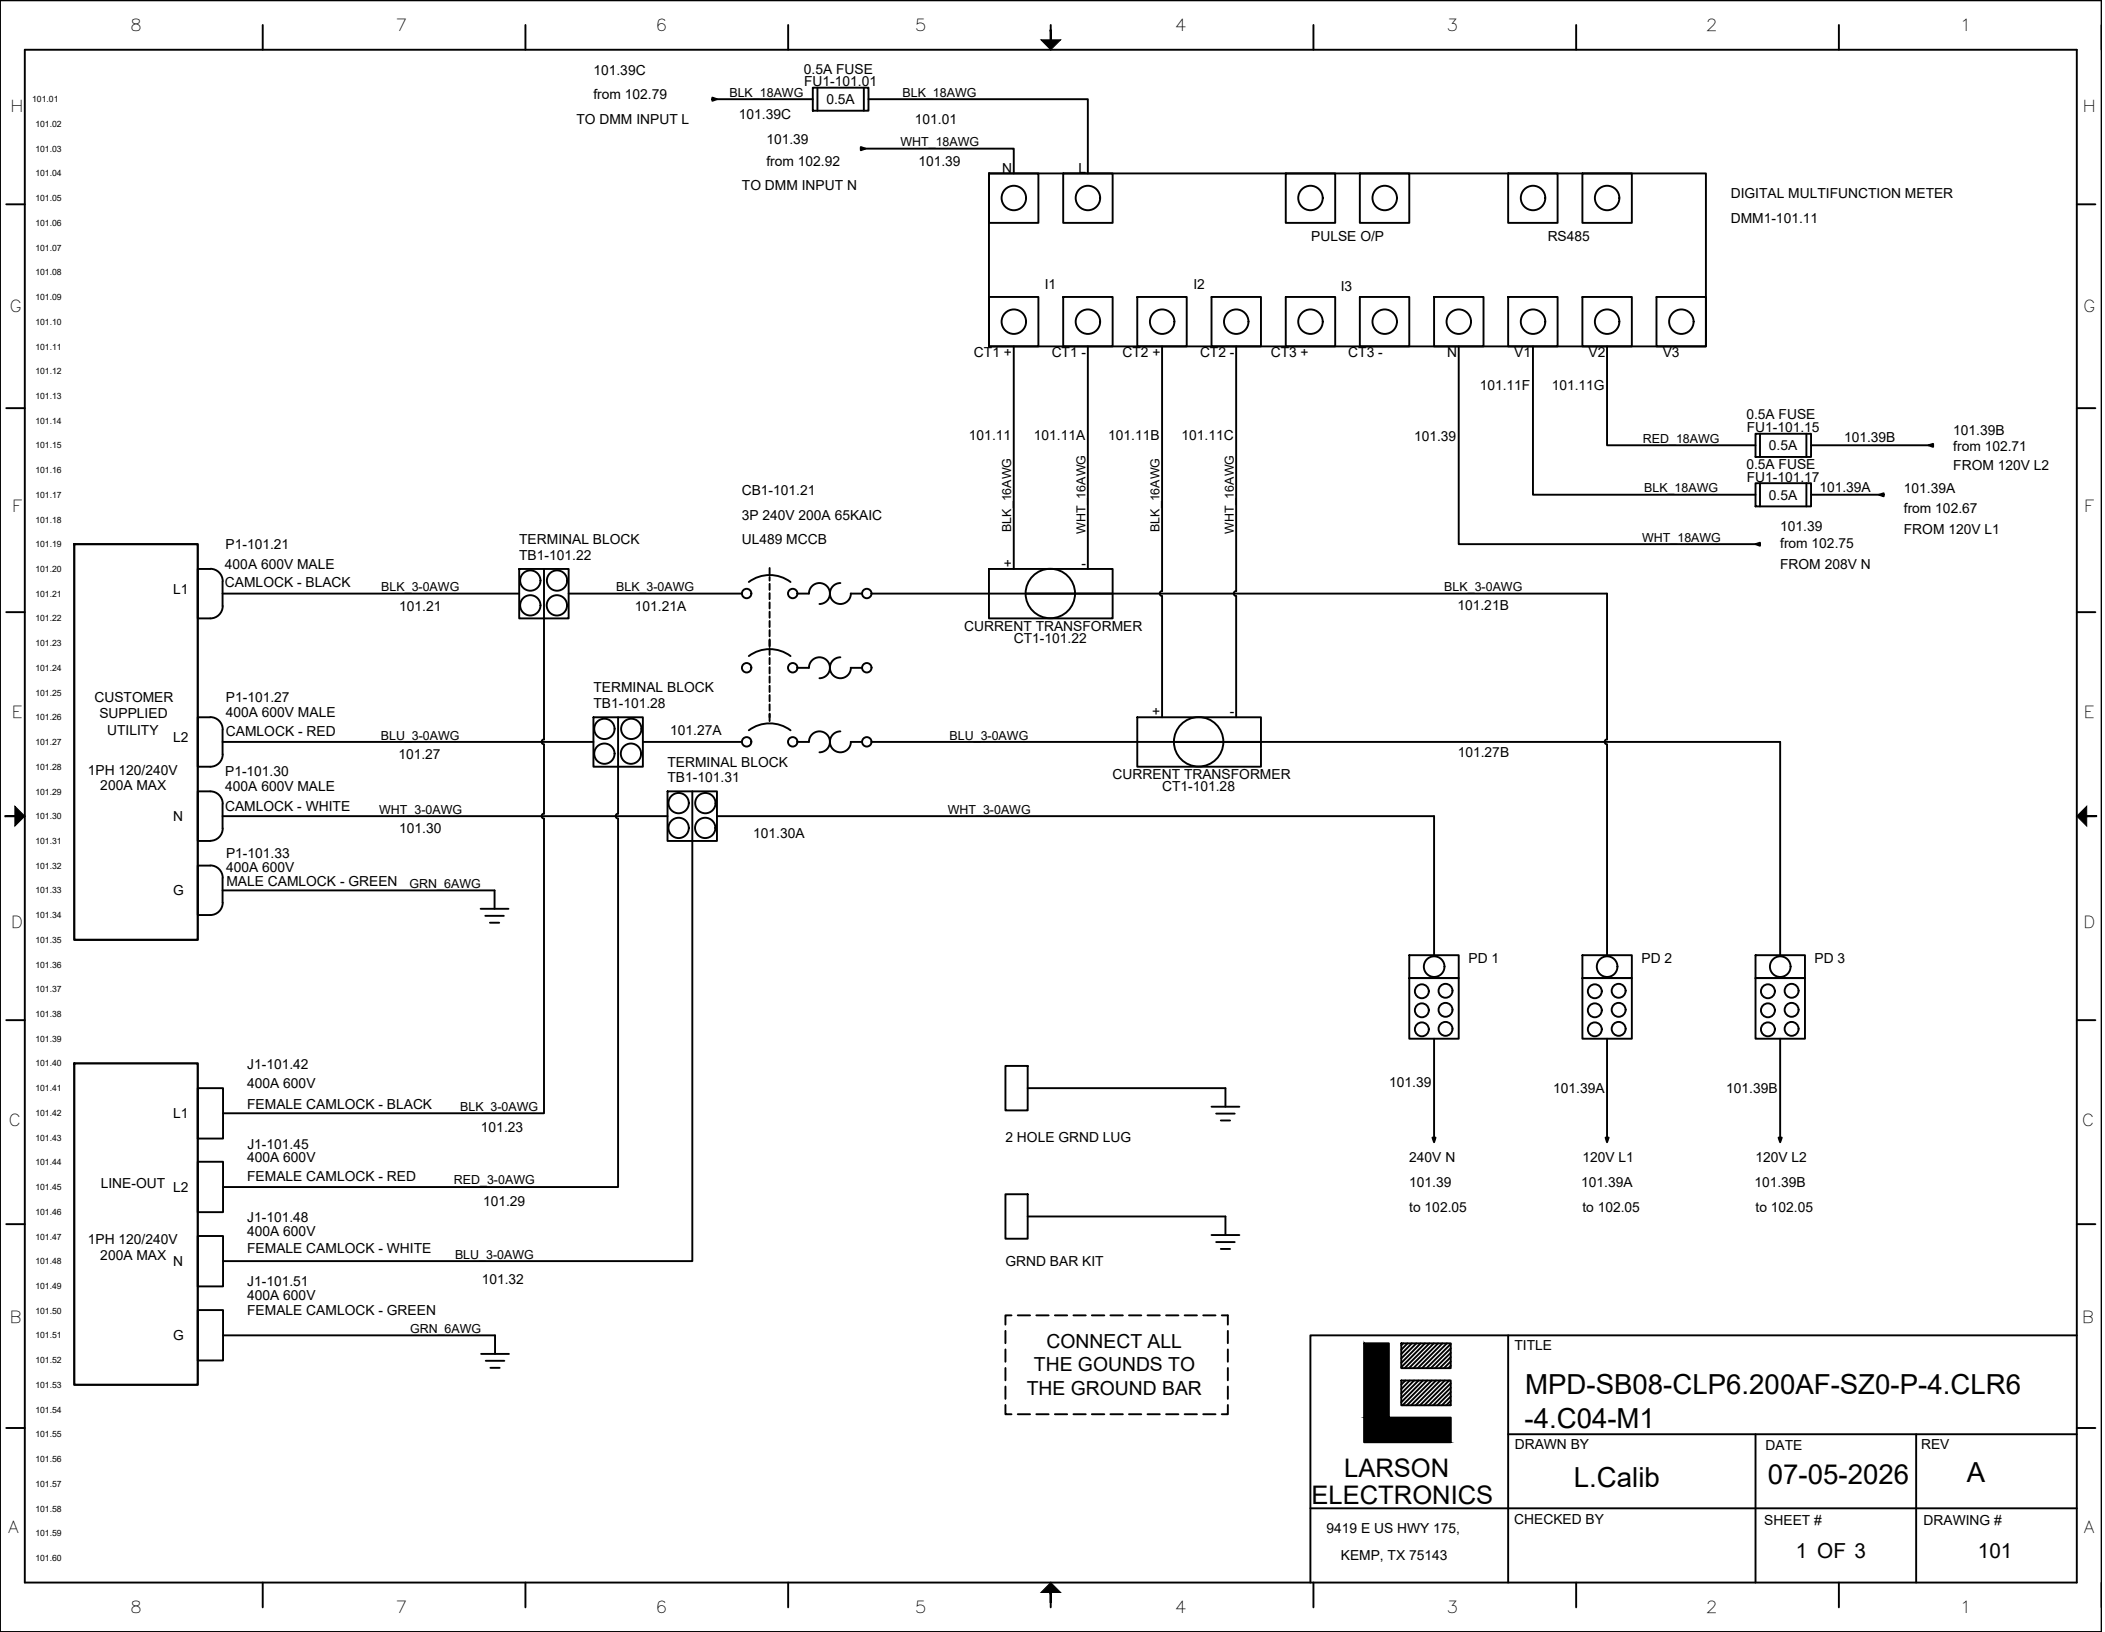

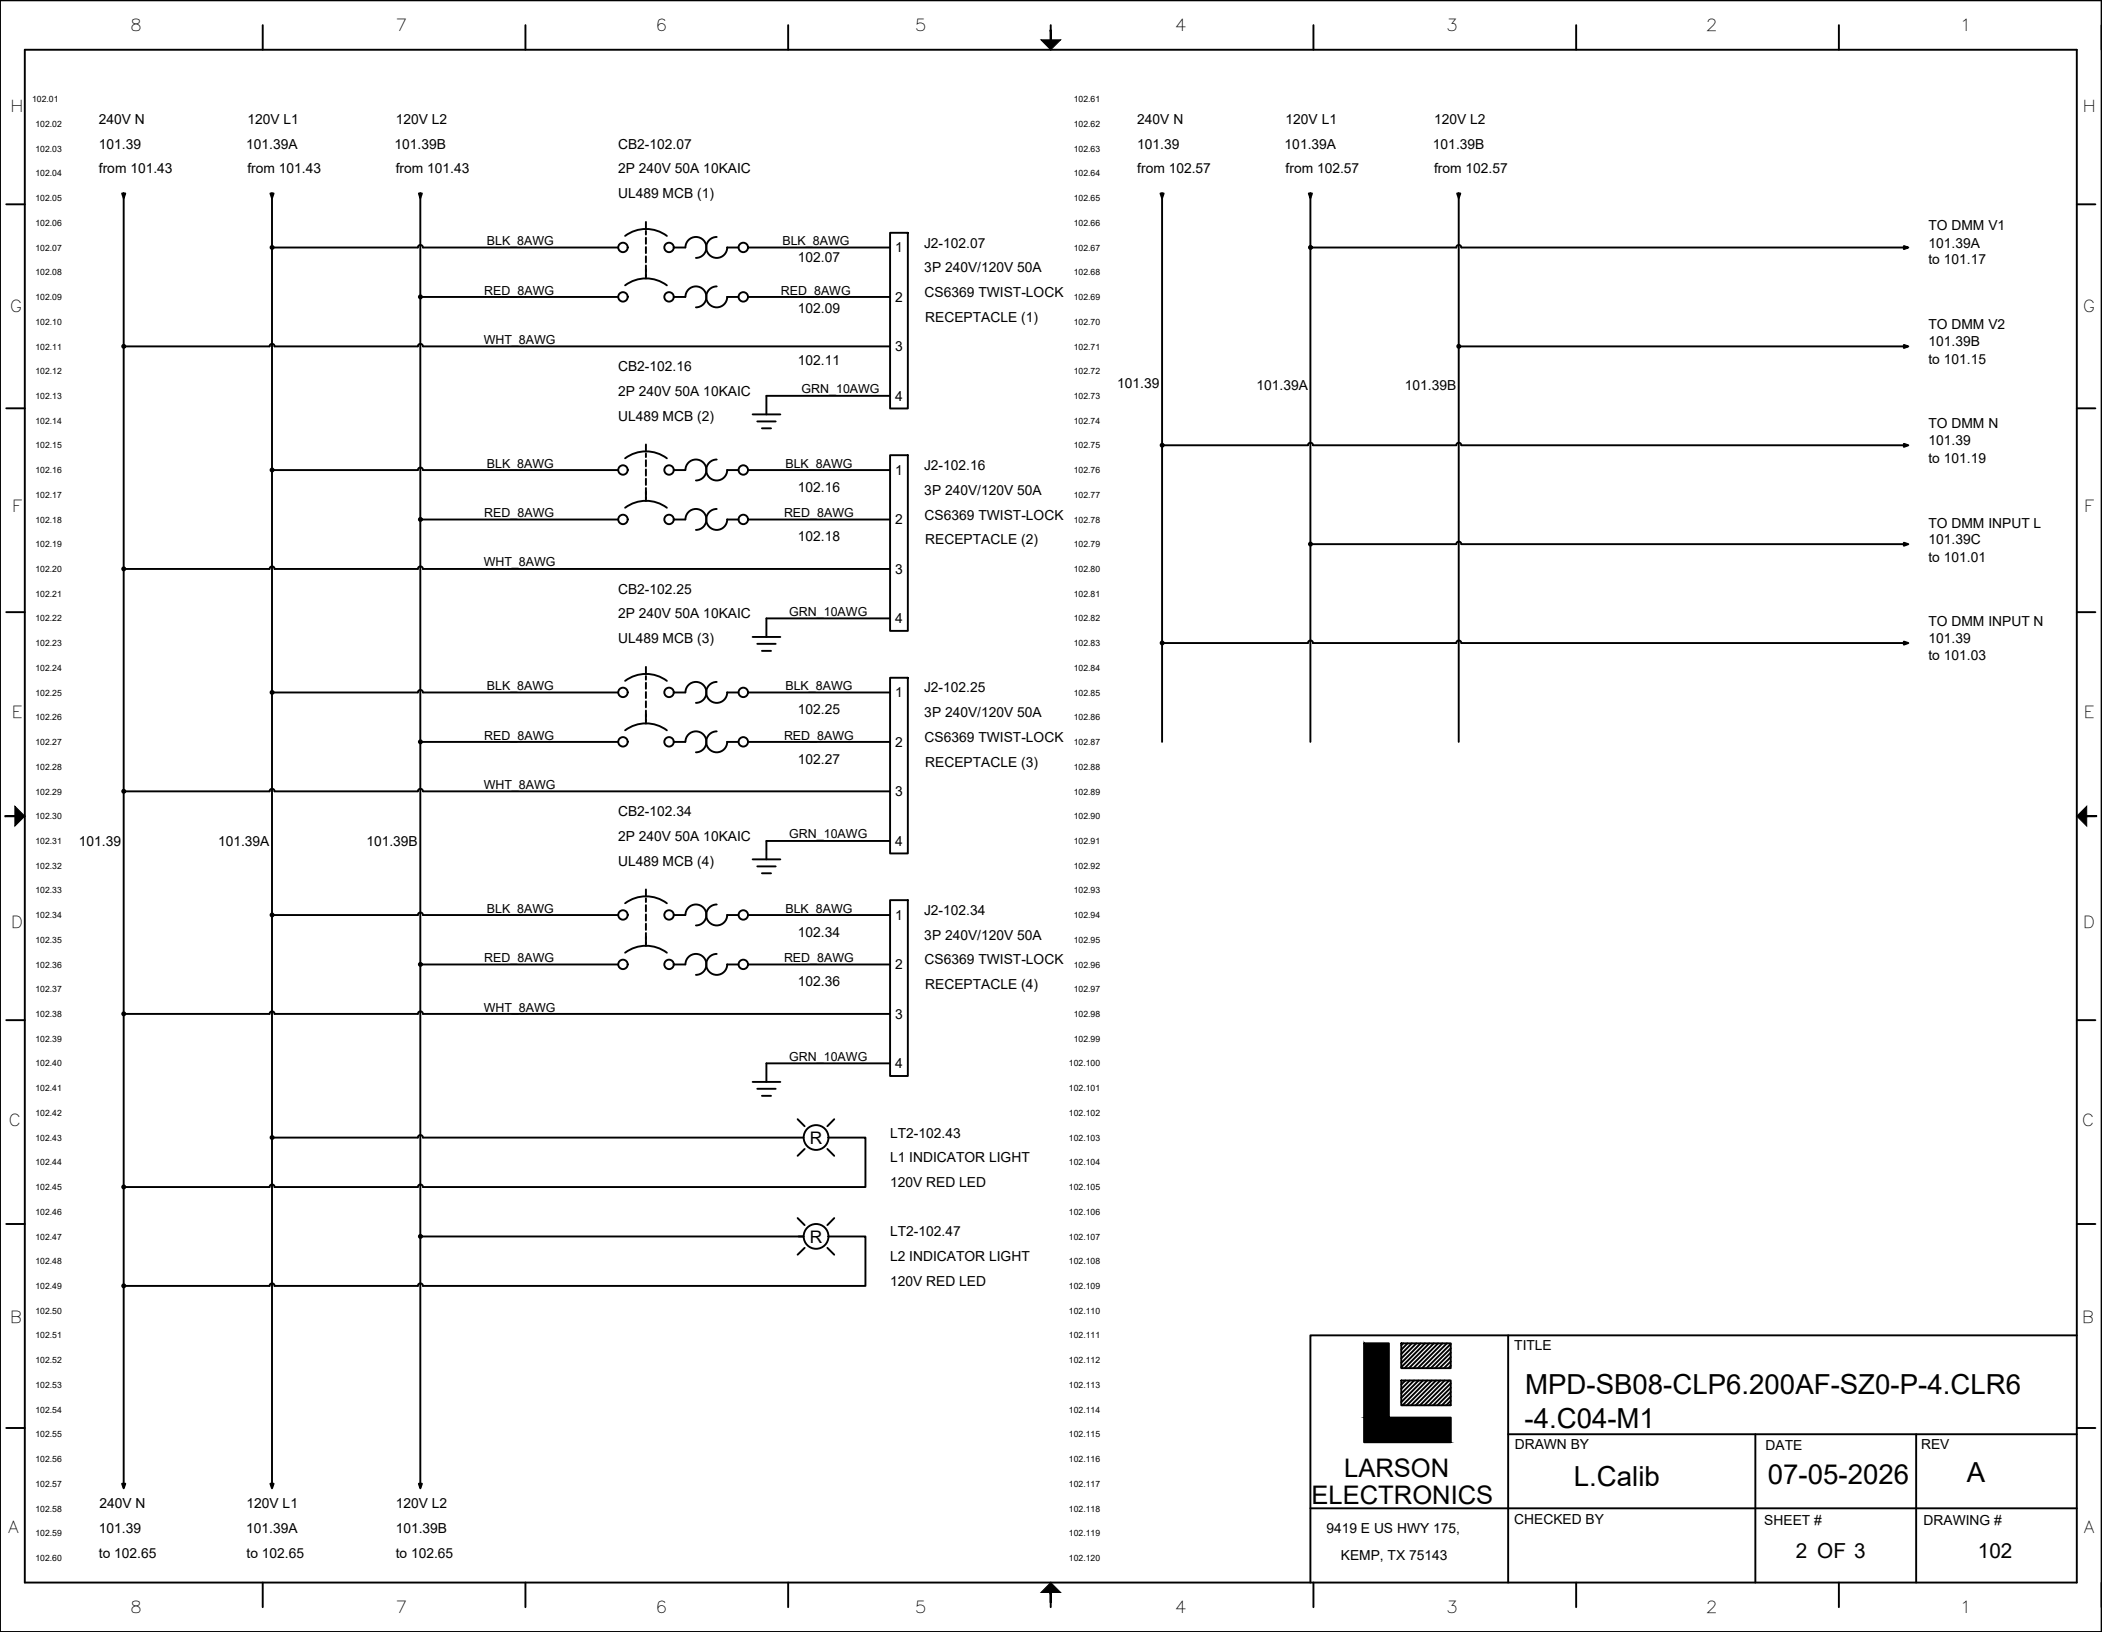

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1		
	DRAWN BY L.Calib	DATE 07-05-2026	REV A
	CHECKED BY	SHEET # 2 OF 3	DRAWING # 102

	8	7	6	5	4	3	2	1
103.01								
103.02								
103.03								
103.04								
103.05								
103.06								
103.07								
103.08								
103.09								
103.10								
103.11								
103.12								
103.13								
103.14								
103.15								
103.16								
103.17								
103.18								
103.19								
103.20								
103.21								
103.22								
103.23								
103.24								
103.25								
103.26								
103.27								
103.28								
103.29								
103.30								
103.31								
103.32								
103.33								
103.34								
103.35								
103.36								
103.37								
103.38								
103.39								
103.40								
103.41								
103.42								
103.43								
103.44								
103.45								
103.46								
103.47								
103.48								
103.49								
103.50								
103.51								
103.52								
103.53								
103.54								
103.55								
103.56								
103.57								
103.58								
103.59								
103.60								
	8	7	6	5	4	3	2	1

TAGS	QTY	CATALOG	DESCRIPTION
J2-102.07 J2-102.16 J2-102.25 J2-102.34	4	UNV00008818	CS6369 50A 250V 3P RECEPTACLE
2 HOLE GRND LUG	1	UNV00007136	2 HOLE GROUND LUG
P1-101.30	1	UNV00002290	600V 400A MALE CAM LOCK WHITE
P1-101.21	1	UNV00008711	600V 400A MALE CAM LOCK BLACK
P1-101.33	1	UNV00008712	600V 400A CAM LOCK GREEN
P1-101.27	1	UNV00008715	600V 400A MALE CAM LOCK RED
J1-101.48	1	UNV00013752	600V UPTO 400A #2-4/0 AWG WHT FEMALE CAM LOCK RECEPTACLE
J1-101.42	1	UNV00013753	600V UPTO 400A #2-4/0 AWG BLK FEMALE CAM LOCK RECEPTACLE
J1-101.45	1	UNV00013755	600V UPTO 400A #2-4/0 AWG RED FEMALE CAM LOCK RECEPTACLE
J1-101.51	1	UNV00013758	600V UPTO 400A #2-4/0 AWG GRN FEMALE CAM LOCK RECEPTACLE
CB1-101.21	1	UNV00014726	3P 200A 240/480V MCCB
CB2-102.07 CB2-102.16 CB2-102.25 CB2-102.34	4	UNV00014731	2P 250V 50A DIN RAIL MOUNT MCCB UL489
DMM1-101.11	1	UNV00016483	POWER METER, 1&3-PH, POSITIVE LCD, 100-240V
FU1-101.01 FU1-101.15 FU1-101.17	3	UNV00016473	0.5 Amp 250V Glass Fuse
LT2-102.43 LT2-102.47	2	UNV00015469	125V RED INDICATOR LIGHT 1.5MA
TB1-101.22 TB1-101.28 TB1-101.31	3	UNV00016551	620A 4 HOLE TERNINAL BLOCK
PD 1 PD 2 PD 3	3	UNV00016633	POWER DISTRIBUTION BLOCK 380A 1-6 OPENING
GRND BAR KIT	1	UNV00013942C	GROUND BAR KIT
CT1-101.22 CT1-101.28	2	UNV00021008	AC Current transformer, Solid core, 200A Pri -5A Secd 1.56in dia. M4x0.7

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-SB08-CLP6.200AF-SZ0-P-4.CLR6 -4.C04-M1		
	DRAWN BY L.Calib	DATE 07-05-2026	REV A
	CHECKED BY	SHEET # 3 OF 3	DRAWING # 103

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664





Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

ETL: UL 1640 - NEC / United States standards

ETL: CAN/CSA-C22.2 No. 14 – CEC / Canada standards

The MGL, MPD, MGS, WAL Series are certified to NEC and CEC standards for power distribution systems. These units are constructed using individual components certified to NEC and CEC standards, and are built to UL 1640 and CAN/CSA C22.2 No 14.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX
Date of issue: September 11, 2019

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the statements(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL Series from Larson Electronics LLC utilize components certified to NEC and CEC standards. Larson Electronics LLC specifies wiring device standard designations (e.g. NEMA 5-20R, NEMA L6-30R, CS8265C) in the electrical diagrams and spec sheet of each product. Unless specified, the brands of components used, which may vary based on availability at the time of build, include but are not limited to: Hubbell, Leviton, Molex, Daniel Woodhead, Legrand, Eaton, Thomas & Betts, Russel Stroll, Meltric, Mennekes, ABB Group, Emerson, Appleton, Crouse Hinds, Killark, R.Stahl, or other certified equipment manufacturers.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



TECHNICAL INFORMATION

POWDURA® POLYESTER TGIC POWDER COATING

PRODUCT DESCRIPTION

PLR2-60002

RAL 5010 GENT BLUE

POWDURA® Polyester TGIC Powder

Coatings are recommended for a broad range of interior/exterior functional and decorative applications.

Advantages:

- Provides excellent overbake resistance
- Good chemical resistance
- Very good outdoor exposure qualities
- Wide range of special effects available
- Available in a broad range of colors

Many applications, including:

Steel Furniture
Refrigeration
Electronic Cabinetry
Scaffolding
Electrical Equipment
Instrument Housings

Appliances
Sporting Goods

Storage: Powdura® Powder Coatings should be kept in a dry and cool area at temperatures below 80°F (27°C). When not in use, store powder in sealed containers: fine powders are hygroscopic.

Substrate Preparation: Substrate should be free of grease, oil, dirt, fingerprints, drawing compounds, any contamination, and surface preparation treatments to ensure optimum adhesion and coating performance properties. The use of a chemical conversion coating prior to the application of a powder coating is strongly recommended.

Testing: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full-scale application.

CAUTIONS

Thoroughly review product SDS prior to using this product. Please consult your local sales representative or your local Sherwin-Williams facility for additional information.

Special Advisory: River texture type finishes are unique finishes that may vary with application, film thickness and cure conditions. Light colors and very dark colors may occasionally show colored specks that appear as contamination.

This is the nature of this type of finish and cannot be predicted or controlled. Thorough cleaning is required when switching to a normal smooth powder coating to prevent craters in the smooth finish.

APPLICATION

Cure Schedule: 10 MIN @ 400F

Film Thickness Range(mils): 3.0-5.0

ATTRIBUTES

Specific Gravity(g/ml): 1.72

Coverage at 1.0 Mil(ft²/lb): 112.4

60° Gloss: 15-30
(ASTM D-523)

Adhesion: 5B
(ASTM D-3359)

Flexibility: Pass 1/8"
(ASTM D-522)

Pencil Hardness: H-2H
(ASTM D-3363)

Impact Resistance(in.lb): Dir 100 in-lbs
(ASTM D-2794) Rev 100 in-lbs

Note: Performance measured using 24-gauge Bonderite® 1000 test panels.

Shelf Life: 12 Months

Sherwin-Williams recommends that all material be used in FIFO order (first in - first out). Materials that exceed the recommended shelf life should be tested prior to use.

Note:

Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating and opinions stated above pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application, which are not known, or under our control, The Sherwin-Williams Company cannot make any warranties or guaranties as to the end results.

08 00

Grove City Product Mod

24-Mar-2020



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC MGL, MPD, MGS, WAL Series industrial line of portable power distribution systems are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

[<- Back](#)

Product Description

Title: STAGE & STUDIO PORTABLE WIRING COMPARTMENTS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Power Distribution System, Model Nos. MGL, MPD, MGS, WAL series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Stage & Studio Portable Wiring Compartments (UL-1640) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

Americas+1-888-347-5478
(or +1-312-906-7801)

Email
dirlist@intertek.com

[Intertek Home](#)
[Product Directories](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.

All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: INDUSTRIAL CONTROL EQUIPMENT

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Industrial Control Panels For General Use.

Power Distribution System, Model Nos. MGL, MPD, MGS series; Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.

Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

The MGL, MPD, MGS, WAL series complies with the below standards set forth by the listed Association's requirements. Purchased and manufactured components are evaluated to Larson Electronics LLC Quality Control Management system per ISO 9001:2015. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Evaluated Standards:

AISC: Structural steel skid design

NFPA 70: National Electrical Code

ASTM A36: Standard Specification for Carbon Structural Steel

ASTM A123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

ASTM A489: Standard Specification for Carbon Steel Lifting Eyes

ASTM A502: Standard Specification for Rivets, Steel, Structural

ASTM A563: Standard Specification for Carbon and Alloy Steel Nuts

ASTM A500: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes

ASTM B172: Standard Specification for Rope-Lay-Stranded Copper Conductors Having Bunch-Stranded Members, for Electrical Conductors

ASTM D7803: Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Powder Coating

SAE J429: Mechanical and Material Requirements for Externally Threaded Fasteners

AWS D1.1: Structural Welding – Steel

ICEA S-58-679: Standard for Control, Instrumentation and Thermocouple Extension Conductor Identification

ICEA S-75-381: Portable and Power Feeder Cables for Use in Mines and Similar Applications

NEMA OFP 1-2017: Protection of Receptacle Outlets in Wet Locations According to the National Electrical Code



NEMA PB 1-2011: Panelboards

NEMA ST 20-2014: Dry Type Transformers for General Applications

NEMA WD 1-1999 (R2015): General Color Requirements for Wiring Devices

ANSI C80.1-2015: American National Standard for Electric Rigid Steel Conduit

ANSI C119.4-2016: American National Standard for Electric Connectors

ANSI Z535.4-2011: American National Standard for Product Safety Signs and Labels

ANSI/IEC 60529-2004 (R2011): American National Standard for Degrees of Protection
Provided by Enclosures (IP Code)

Signed for and on behalf of: Larson Electronics, LLC

Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas

Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The MGL, MPD, MGS, WAL series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: MGL, MPD, MGS, WAL Series
Description: Power Distribution Systems

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union ("EU") Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances ("REACH").

REACH does not apply to manufactured products which are referred to as "completed articles". Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature:

Name: James Thomas
Position: Operations Manager



Frequently Asked Questions (FAQ)

There are no Faqs