

EPS-25A

Explosion Proof On/Off Switch - Class I, Div. 1 & 2 - Class II, Div. 1 & 2 - 20 Amp Rated

Product ID: 46946



Image: EPS-25A

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPS-25A Explosion Proof Tumbler Switch

Switch Voltage Rating: 120-277 VAC

Switch Current Rating: 20 Amps- 1 HP @120 Vac & 2 HP @ 240 Vac

Grounding: Single Internal Housing Ground Screw

Configuration: Feed Through, Front Switch

Hub Qty: (2) Feed Through or (1) Dead End

Hub Size: 1/2, 3/4, 1 inch option

Unit Materials: Box/Receptacle- Malleable Aluminum, Sealing Chamber-Aluminum

Finish: Triple-coat—Zinc Electroplate, Chromate, Epoxy powder coat

Insulation: Integral Bushings in Conductor Openings

Mounting: External Mounting Lugs on Body

Unit Dimensions: 3.00"-W X 4.69"-D X 6.13 "-L

Switch Type: Single Pole, Double Pole, Three Pole

Certifications - Compliance

Class 1 Division 1 & 2 Groups C, D

Class 2 Division 1 & 2 Groups E, F, G

Class 3

NEMA 7 Groups C & D

NEMA 9 Groups E, F, G

Certified under E52354 - DSD933, DSD934, DSD936, DSD937

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

The Larson Electronics EPS-25A Explosion Proof Feed Through Tumbler Switch is UL Listed Class 1 Division 1 & 2 and Class 2 Division 1 & 2 and provides a safe and secure method for operators to interrupt power before connecting and disconnecting portable or stationary electrical devices and equipment in hazardous locations.


This explosion proof tumbler switch is ideal for operators seeking a high quality explosion proof switch rated for use in hazardous areas designated Class 1 Division 1 and Class 2 Division 1. This explosion proof switch is rated at 20 amps-120-277 Vac and 1 HP at 120 Vac

and 2 HP at 240 Vac. The entire unit is constructed of copper free aluminum. This unit is easily wall mounted via integral mounting tabs at two corners of the housing and provides two 1/2" hub openings located on the top and the bottom of the housing for running electrical conductors in a feed through configuration. A bushing seal at each conductor opening prevents damage to wiring insulation.

This unit is rated to handle electrical loads of 120-277 VAC up to 20 amps and is suitable for use in environments where combustible dusts and particulates may be present.



[Click Photo to Enlarge](#)

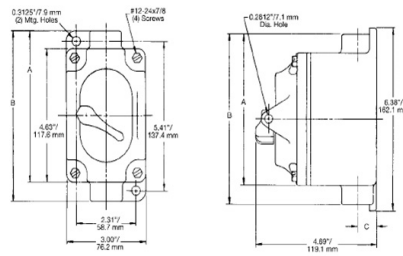


[Click Photo to Enlarge](#)

The EPS-25A explosion proof switch cover and housing box is constructed of malleable aluminum with all arcing devices contained within an explosion proof labyrinth switch for the highest protection possible. Each 1/2" hub opening is fitted with an integral bushing to prevent fraying or damage to insulation. Two external mounting lugs provide simple and secure mounting of the unit to walls and flat surfaces. The unit box, switch, and face plate are all included with the product.

1/2" NPT tapped conduit openings are provided on the top and bottom of the unit in feed through versions while dead end versions have a single conduit hub, providing easy and secure connection to main power line supplies.


Suggested Applications: Manufacturing, Industrial, Warehouse, Lighting, Lighting, Wet areas or Locations Where Combustible Dust is Present.

8	7	6	5	4	3	2	1	
H	REV	DESCRIPTION						DATE
	A	PRODUCTION RELEASE						10/14/2021
G	EPS-25A-1P-XX-XX 							
F								
E								
D								
C								
B								
A								
8								7

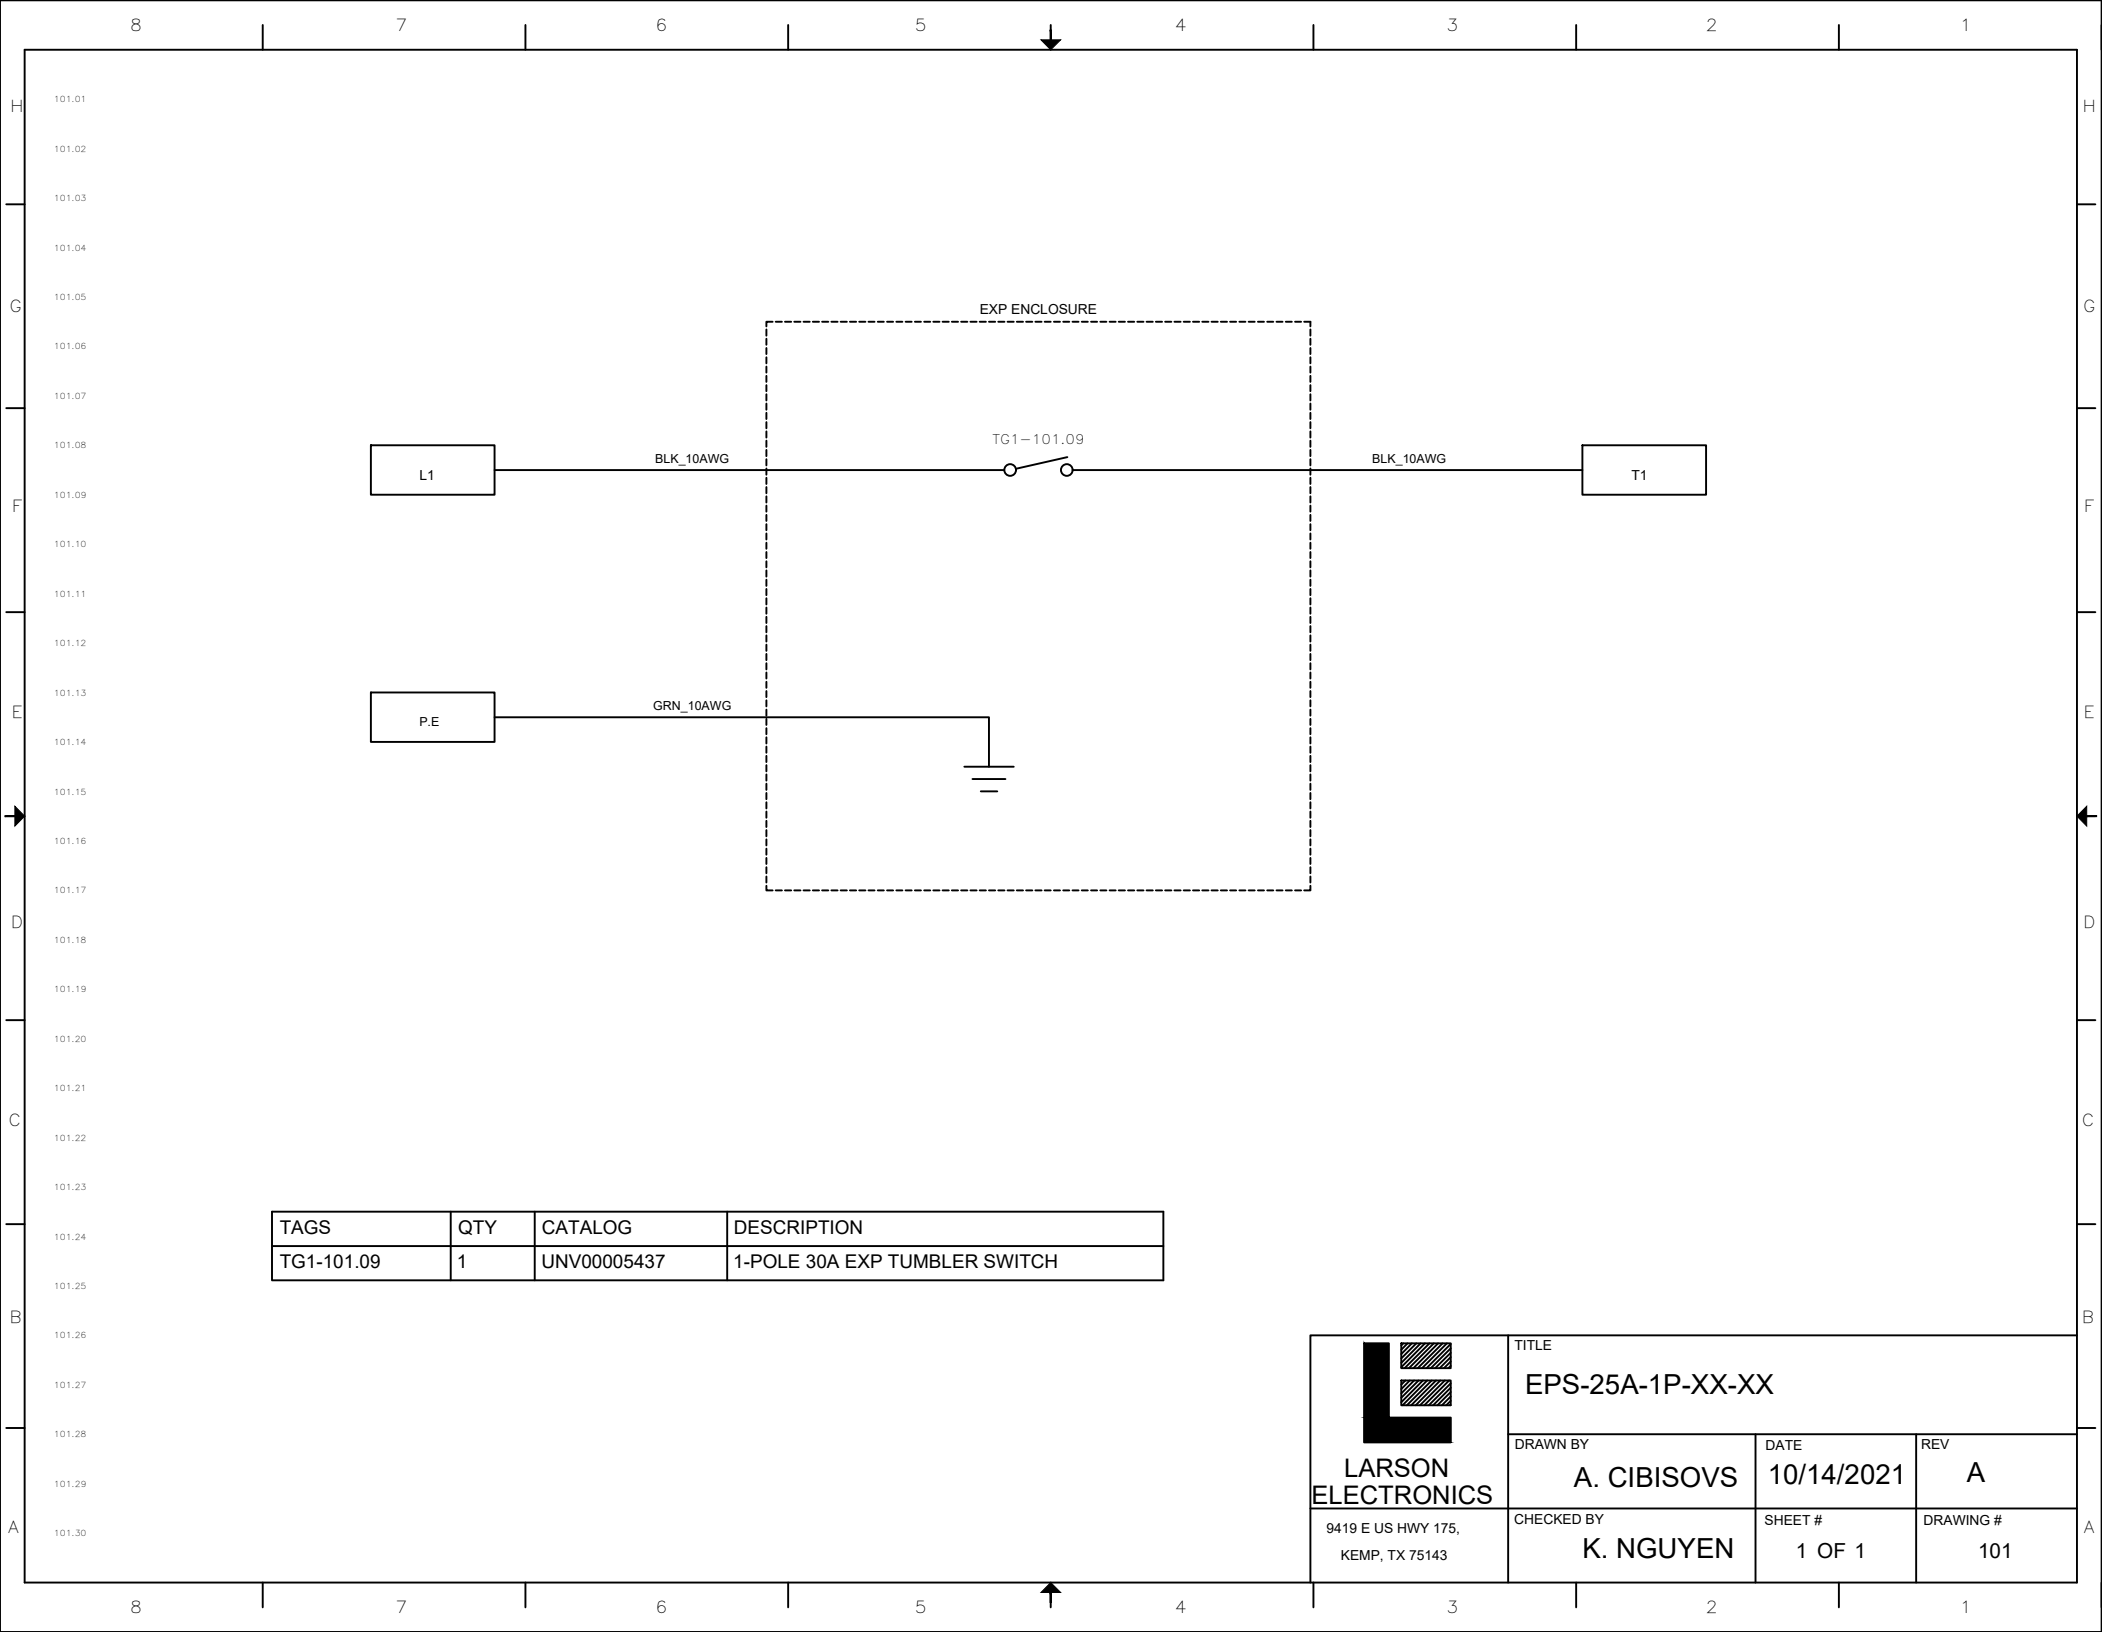

TAGS	QTY	CATALOG	DESCRIPTION
TG1-101.09	1	UNV00005437	1-POLE 30A EXP TUMBLER SWITCH

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE EPS-25A-1P-XX-XX		
	DRAWN BY A. CIBISOVS	DATE 10/14/2021	REV A
	CHECKED BY K. NGUYEN	SHEET # 1 OF 1	DRAWING # 101

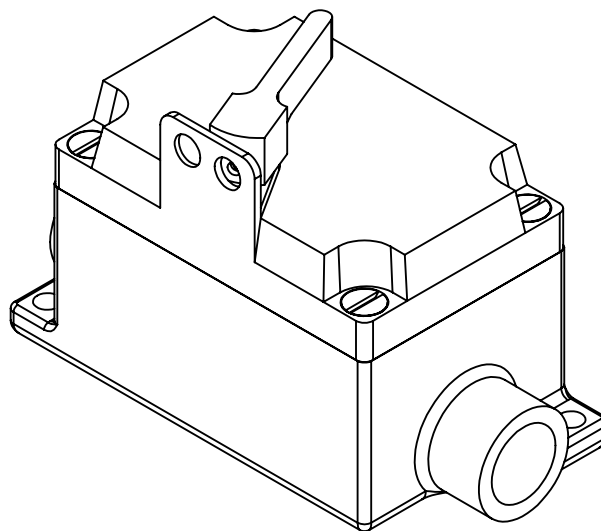

TITLE:

EPS-25A


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LARSON ELECTRONICS LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
LARSON ELECTRONICS LLC IS
PROHIBITED.

UNLESS OTHERWISE NOTED:

ANGLE: +/- .5
.X +/- .02
.XX +/- .01
.XXX +/- .005

DIMENSIONS ARE IN INCHES				NAME
Quantity	1		DRAWN	Luis Martinez
MATERIAL			CHECKED	N/A
DO NOT SCALE DRAWING			DATE	03/23/2017

SIZE A	DWG. NO.	REV 00
SCALE: NTS		SHEET 1 OF 3

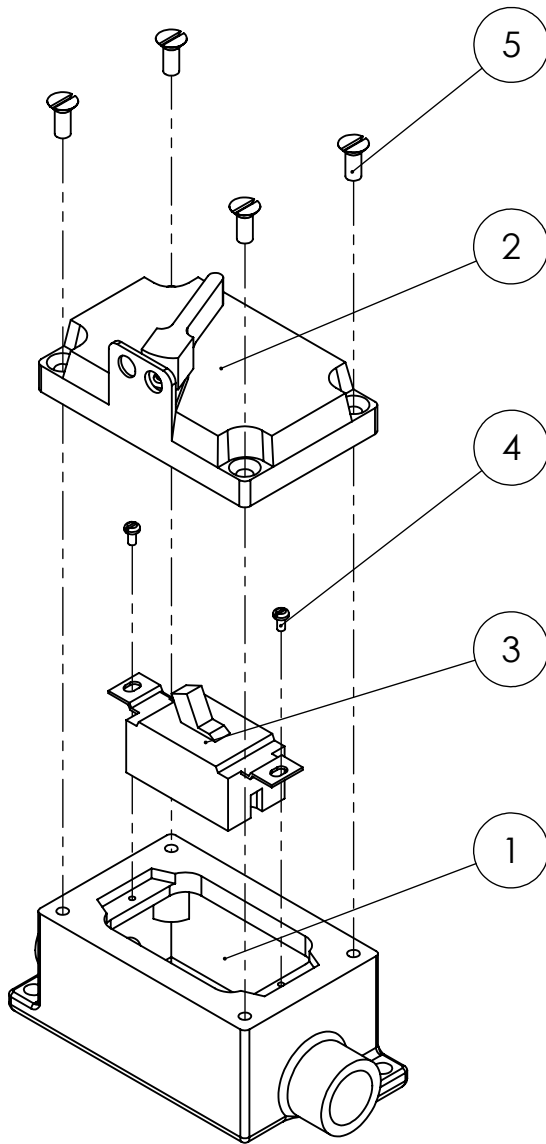

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	EPS-25A-BASE BODY	Base body for the EPS-25A Assembly	1
2	EPS-25A-COVER	Cover with handle that moves switch	1
3	Switch	Electrical switch, on/off function	1
4	FS-PHS-5-40-L.025	Pan Head slotted #5-40 screw, .25 length	2
5	FS-CSSD0.25-20-L0.625	1/4-20x5/8 Countersunk screw, Slotted Drive	4



TITLE:

EPS-25A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

UNLESS OTHERWISE NOTED:

ANGLE: +/- .5
.X +/- .02
.XX +/- .01
.XXX +/- .005

DIMENSIONS ARE IN INCHES				NAME
Quantity	1		DRAWN	Luis Martinez
MATERIAL			CHECKED	N/A
DO NOT SCALE DRAWING			DATE	03/23/2017

SIZE A	DWG. NO.	REV 00
SCALE: NTS		SHEET 2 OF 3





5

4

3

2

1

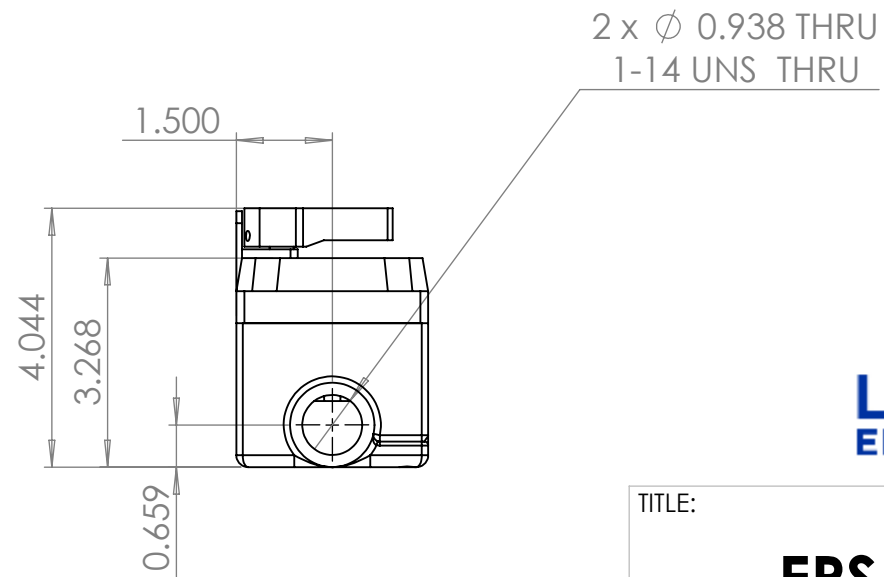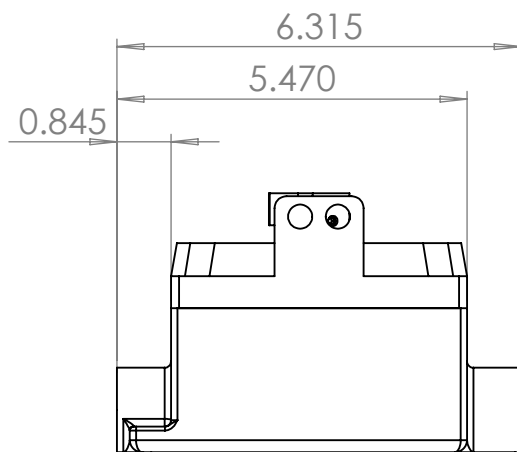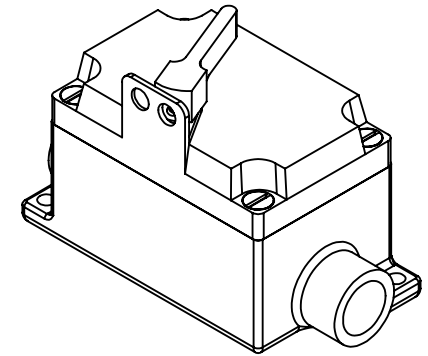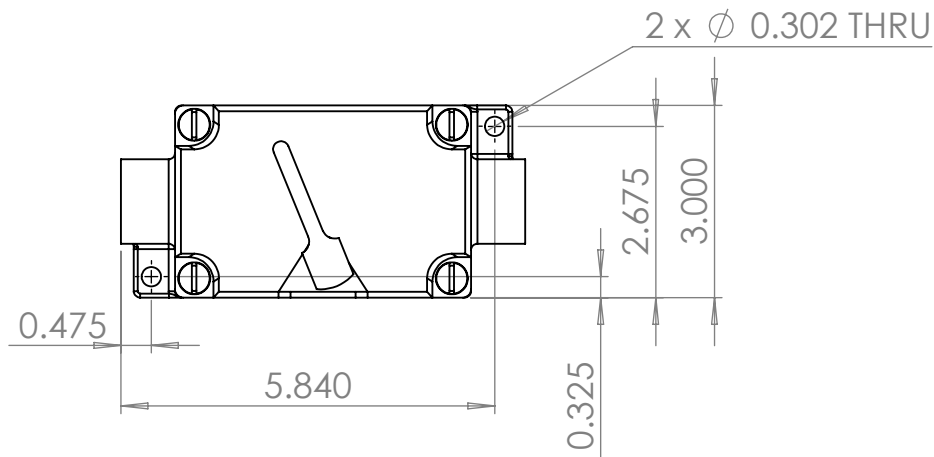

TITLE:

EPS-25A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

UNLESS OTHERWISE NOTED:

ANGLE: +/- .5
.X +/- .02
.XX +/- .01
.XXX +/- .005

DIMENSIONS ARE IN INCHES				NAME
Quantity	1		DRAWN	Luis Martinez
MATERIAL			CHECKED	N/A
DO NOT SCALE DRAWING			DATE	03/23/2017

SIZE A	DWG. NO.	REV 00
SCALE: NTS		SHEET 3 OF 3





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664







Frequently Asked Questions (FAQ)

There are no Faqs