Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

LEDT-14W

2' LED Light Tube - Replaces F17 T8 Bulbs - 50,000 Life Hours - 14 Watts - 1260 Lumen

Product ID: 47324



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

LEDT-14W 14 watt T-series
UL Listing: United States

Dimensions: 24"

Base Type: G13
Watts: 14 watts
Voltage: 110 Volts to 277 VAC 12/24 Volt Also Available

Beam angle: 120 degrees

Lamp Life Expectancy: 50,000+ Hours

Lamp Type: LED Tube

Operating Temp: -20 C to 85 C

Color temperature: 5300k
Lumens Per Watt: 90
Total Lumens: 1,260

Special Orders- Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

Buy American Compliant

The Larson Electronics LEDT-14W 14 watt T-series LED tube lamp works with T8 fluorescent light fixtures. Ideal for use in our EPL-24, HAL-24, and HALP-24 explosion proof fixtures, it is also an excellent choice for upgrading existing fluorescent lamp fixtures to LEDs as well as a direct replacement for any of our own LED fluorescent light fixtures.

This 14 watt LED tube lamp can be configured for any T series fluorescent bulb fixture and requires no ballast. Internally, you simply bring the black wire to one end and the white wire to the other. The polycarbonate lens diffuses the light and makes this bulb ideal for food safe environments as there is no glass. The aluminum housing serves as a heat sink and provides rigidity and strength for this LED bulb. These LED light tubes can also be plugged directly into fluorescent T8 light fixtures with magnetic ballasts, which make them an ideal retrofit upgrade for older T12 fluorescent lights with magnetic ballasts.
In fluorescent light fixtures with electronic ballasts, the operator needs to bypass the ballast and wire the power directly to one or both ends of the LED tube (black wire to one end and white wire to the other). Thus, this is an ideal upgrade for 2 foot fixtures with failed ballasts. These multi-voltage LED fluorescent bulbs run directly off any voltage ranging from 110 volts to 277 volts, including 120 volts, 230 volts, 277 volts, etc. We now offer 12/24 volt LED T-series bulbs as well.


Click Photo to Enlarge


Click Photo to Enlarge


Click Photo to Enlarge

These LED tube lamps are Buy American Act compliant. These lamps are produced in a World Trade Organization Government Procurement Agreement country and are NOT made in China. They are made in our dedicated factory in South Korea. These are the second generation of our 14 watt LED tubes. Using an Extech light meter, these LED T-series lamps produced 2.5 times the foot candles of the same 2 foot fixture with two T5 bulbs when measured at a distance of 8 feet. Lumen output is 90 lumens per watt.
These LED fluorescent tube replacements can be used as upgrades or replacements to our own Larson Electronics.com explosion proof fluorescent lights, explosion proof paint spray booth lights as well as any other T series light fixture the operator already has in house. We have specially designed these for our explosion proof light fixtures, however, they can be used as replacements in standard fluorescent light fixtures. In our facilities, we replaced worn or spent fluorescent bulbs with these LED bulbs by removing the ballasts and bringing the white wire to one end the black wire to the other end of the LED tube.

LED Lamp Benefits

1. 50,000 hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LEED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off – No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.
15. Brings out natural appearance of products in sales or manufacturing applications
16. Preserves integrity of retail products... no heat damage to formulations or

thermal fade of branded packaging in display cases
17. Unlimited indoor applications for overhead lighting, retail fixtures, signage, custom lighting accents, manufacturing and general area illumination
18. Easily retrofit existing conventional light fixtures, simplifies troffers since no ballasts needed. Durable enough for portable use in exhibitions and tradeshows

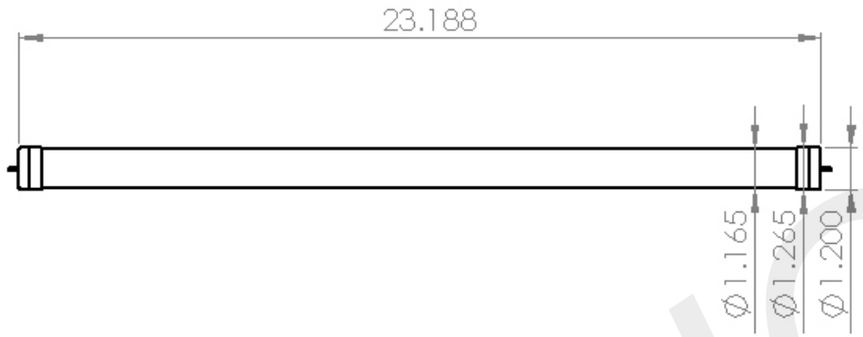



MAGNALIGHT

Magna Light

www.Magnalight.com 1-800-369-6671

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
		INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:		
		MATERIAL			
NEXT ASSY	USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

TITLE:

LEDT-14W

SIZE	DWG. NO.	REV
A		
SCALE: 1:10		SHEET 1 OF 1

5 4 3 2 1







intertek
Total Quality. Assured.



<- Back

Product Description

Title:	SELF-BALLASTED LAMPS & LAMP ADAPTERS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	LED Tube Light, Model Nos. LEDT8-36-V1, LEDT12HO-36-V2, LEDT8-48-V3, LEDT12HO-48-V4, LEDT8-24-V1, LEDT12HO-24-V2, LEDT8-24-D, LEDT12HO-24-D, LEDT8-F15, LEDT8-F15-RP, LEDT8-48-D, LEDT12HO-48-D, LEDT8-28W-V1, LEDT12HO-28W-V2 followed by -2700K, -3000K, -4000K, -4500K, -5000K, -5600K, -6000K, -DAYLIGHT, -UVA, -UVB, -UVC, -IR750, -IR850, -IR940, –CLR, -FRST, -HIFRST, -120V, -1227, –X1, -X2.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Self-Ballasted Lamps and Lamp Adapters (UL-1993) and are identified as CLASSIFIED with the ETL Listed Mark

<- Back

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478 (or +1-847-660-7407)
Email
etldirectory@intertek.com

Intertek Home
Product Directories
DLP on mobile devices

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

intertek
Total Quality. Assured.



<- Back

Product Description

Title:	SELF-BALLASTED LAMPS & LAMP ADAPTERS
Company:	LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information:	LED Tube Light, Model Nos. LEDT8-36-V1, LEDT12HO-36-V2, LEDT8-48-V3, LEDT12HO-48-V4, LEDT8-24-V1, LEDT12HO-24-V2, LEDT8-24-D, LEDT12HO-24-D, LEDT8-F15, LEDT8-F15-RP, LEDT8-48-D, LEDT12HO-48-D, LEDT8-28W-V1, LEDT12HO-28W-V2 followed by -2700K, -3000K, -4000K, -4500K, -5000K, -5600K, -6000K, -DAYLIGHT, -UVA, -UVB, -UVC, -IR750, -IR850, -IR940, –CLR, -FRST, -HIFRST, -120V, -1227, –X1, -X2.
Evaluated to the following:	A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Self-Ballasted Lamps and Lamp Adapters (CAN/CSA-C22.2 No. 1993) and are identified as CLASSIFIED with the cETL Listed Mark.

<- Back

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478 (or +1-847-660-7407)
Email etldirectory@intertek.com

Intertek Home
Product Directories
DLP on mobile devices

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. Learn more...

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. Learn more...

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

Frequently Asked Questions (FAQ)