Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

LEDP10W-120X2E

120 Watt High Intensity LED Light Bar - 12, 10-Watt LEDs - 10320 Lumen - Extreme Environment

Product ID: 48281



Image: LEDP10W-120X2E

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

LEDP10W-120X2E LED Light Bar
Lamp Type: CREE XLamp MC-E® LED
Dimensions: 11.9"-L 4"-H 3.5"-D **Weight:** 7.5Lbs
Watts: 120
Led Drive %: 90%

Voltage: 9-48 VDC

Spot Beam: 875`L x 100`W

Flood Beam: 250`L x 225`W

Lighting Configuration: 20° Spot or 40° Flood
Mounting: Flat Surface or Tube - Adjustable
Wiring: Deutsch IPD / LADD DT04-2P connector
Amps: 10 (on 12 volts) 5 amps (on 24 volts)
Lumens: 10,320
LED Light Color: 6000K
LED Life Expectancy: 50,000 hours
Optics Efficiency: 90%
Materials: Aluminum Housing, Polycarbonate Lens
Housing Colors: Black or White
Flood Beam: Lux @1 meter= 24,000 @3 meters= 3,850
Spot Beam: Lux @1 meter= 31,500 @3 meters= 6,550

Internal LED Driver Features
Fast average current control
Programmable off-time switching
Linear dimming input
PWM dimming input

Short protection w/Skip mode

Ambient Op Temp -40C to +125C
Pin-compatible with the HV9910B
View Avg-Mode Driver Control PDF

Special Orders - Special Requirements
Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

CE Certified

3 year warranty replacement on this LED light. After 30 days, the customer ships the failed LED light and/or LED bulb to Larson Electronics at their expense. If the failure is a manufacturer defect, we will ship a new replacement to the customer. If failure occurs within 30 days of receipt, Larson Electronics will provide a return label via email to the customer. When the failed light is returned, Larson Electronics will ship a new replacement.

Buy American Compliant


The LEDP10W-120X2E LED Light Bar is ideal for a wide variety of uses including equipment, vehicle, military, law enforcement and industrial manufacturing applications. 10,320 lumen light output with low wattage and amp draw, a 50,000 hour rated service life and 9 to 48 volt compatibility provides operators with a versatile and powerful LED lighting solution.

The LEDP10W-120X2E LED light bar from Larson Electronics produces 10,320 lumens of bright light while drawing only 120 watts @10 amps from a 12 volt electrical system. Twelve CREE XLamp MC-E® ten watt LEDs producing 860 lumens each are arranged in two rows and paired with high purity optics to produce a 20 degree spread spot beam approximately 875’ long by 100’ in width. We also offer floodlight versions with a 40 degree beam spread to provide more light over a larger area nearer the fixture, making flood versions ideal for use as work lights. These LED light bars are waterproof to 3 meters, sealed against intrusion by dust and dirt and very ruggedly constructed to withstand the most demanding environments, conditions and applications.

An integral Pulse Width Modulation controller, small profile, low power requirements, high durability and versatile mounting system makes these LED light emitters a superior lighting solution for a wide array of applications including but not limited to: military, industrial manufacturing, machine visioning, security and law enforcement, boating, vehicles and commercial structure illumination.



This photo shows an open field illuminated only by ambient light at approximately 9:00 pm`.



This photo shows the LEDP10W-120X2E. In flood configuration, the light passes the `Larson Electronics` Sign more than 750 feet away, yet still provides a large width for work area



This image shows a close up picture of the `Larson` sign, notice that the beam output still reaches farther than the sign positioned 750 feet away from the unit.

illumination.

Click Photo to Enlarge Click Photo to Enlarge Click Photo to Enlarge

Heat Management: Heat is the single largest factor in premature LED failure and color shifting. These LED units contain advanced drivers which use pulse width modulation to control heat buildup rather than simple voltage regulators which are typically harsh on sensitive electronics and can contribute to early LED failure. These units automatically sense the temperature of each LED and adjust the energy frequency or “duty cycle” accordingly to maintain heat levels within acceptable ranges. This system in essence flashes current at an extremely fast on and off rate to each LED based upon the LED’s core temperature. This flash rate is too fast to detect with the human eye, but provides precise control of the current flowing to each LED and thus the heat it generates. This allows the LEDs to be driven at up to 100% capacity without overheating or visible loss of light output. The LEDs are always driven at the same voltage but the duty cycle, however, is changed to alter how long the LEDs are actually on or off. The end result is more light with less heat and longer LED life with an average 70% lumen maintenance after 50,000 hours.

PWM Control: The pulse width modulation drivers in this unit also provide secondary benefits through the ability to tap into a provided input wire with an external pulse generator and adjust the duty cycle of the current being applied to the LEDs. Thus you can connect an external dimmer, switch or pulse control and adjust the perceived output of the light, effectively causing the light to flash, dim or brighten to the desired levels. Additionally, this method of controlling light output results in a corresponding drop in amperage draw, so if the duty cycle is cut back to 50% there will be a matching 50% reduction in amperage draw. These units are also able to monitor and adjust input current to maintain the correct LED voltage levels regardless of input levels across a specific range. These LEDP10W series light bars can operate on current ranging from 9 to 46VDC without any modifications necessary as a result. This ability to sense and adjust input current also provides protection against voltage spikes and drops that can occur in vehicle electrical systems which would otherwise result in burning up or premature LED failure without it.





Click Photo to Enlarge Click Photo to Enlarge

Durability: As well as unparalleled heat control, the LEDP10W series of LED light bars from Larson Electronics also offer IP68 rated construction that is designed to withstand extremes of

environmental and operating conditions. These units can withstand rapid temperature changes of -40 degrees Celsius to 85 degrees Celsius, are waterproof to three meters and resist ingress of dust, dirt and humidity. The housings are formed from extruded aluminum and the lenses are unbreakable polycarbonate. The CREE XLamp MC-E® LEDs offer resistance to shocks and vibrations and are rated at 70% lumen maintenance after 50,0000 hours of use.

Mounting: Each unit is equipped with aluminum mounting blocks which slide within the aluminum housing to allow users to adjust their positioning to match existing or user drilled mounting holes. Each aluminum mounting block has an integrated rubber bushing to absorb vibrations and shocks. To secure the lights in place users simply slide the mounting bolts through the aluminum mounting block and rubber isolator, through the mounting surface, then secure the bolt with a locking nut on the opposite side of the mounting surface. This mounting system enables mounting to flat or round surfaces and allows for minimal 7 degrees of flexibility of angle placement of the light. For increased adjustability please see our trunnion mounted versions which add a wider degree of vertical angle adjustment.

Note: Most Larson Electronics LEDLB, LEDP3W, LEDP10W, and LED10W series LED spotlights and floodlights are terminated with a Deutsch IPD / LADD DT04-2P connector. The mating connector plug is DT06-2S. Most LEDLB, LEDP10W and LED10W series lights ship with mating connector as part of a harness or pigtail, depending on the model. Some larger LED lights like the LEDLB-160X2 or LEDLB-200X2 or multiple function LED lights (i.e. high/low beam, modulating, IR/Visible combos) will have different Deutsch connectors.

LEDP10W-120X2E 40° Flood Beam (Opt)





LEDP10W-120X2E 20° Wide Spot Beam(Stnd)




CONDITIONS	
Vin min (V) = 9	**toff (us)** = 2.9
Vin nom (V) = 12	**R1 (kohm)** = 50.2
Vin max (V) = 50	**L1 (uH)** = 3.0
Vo min (V) = 6.5	**L-Pk (A)** = 2.9
Vo nom (V) = 6.8	**L-rms (A)** = 2.9
Vo max (V) = 7	**Ipk (A)** = 2.5
I-LED (A) = 2.2	**R2 (ohm)** = 0.10
Efficiency = .85	**I-FET (A)** = 2.2


fsw nom (kHz) = 150	**fs min (kHz)** = 77
Ts nom (us) = 6.666667	**fs max (kHz)** = 301
Base frequency-	= 36~37Khz @ 12V
Amplitude of pulse width-	= 27Ms
Outside: External dimmer-	= 500Hz
Inside : Current sensing from-	77KHz at 12V to 300KHz at 50V

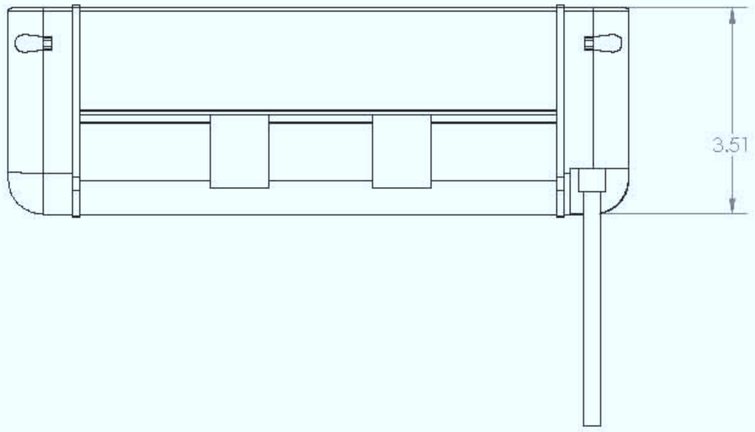

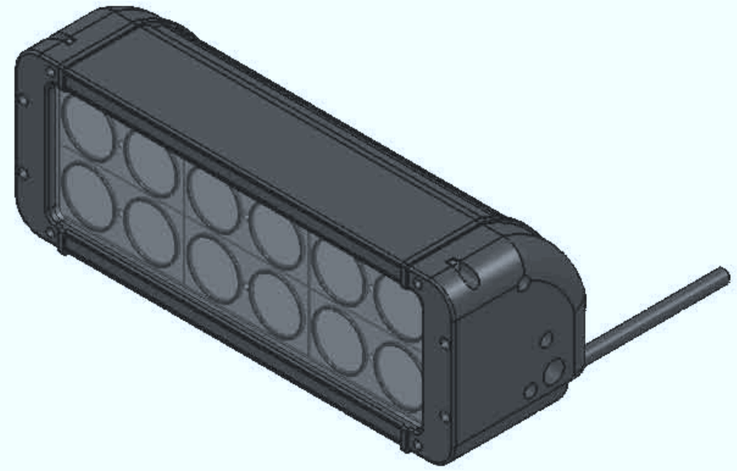

MAGNALIGHT.COM

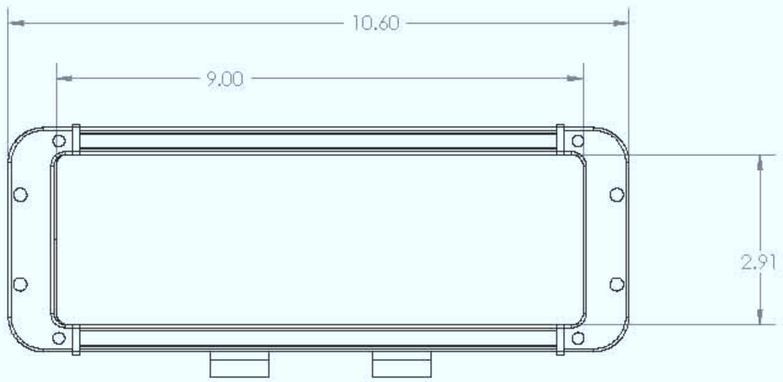

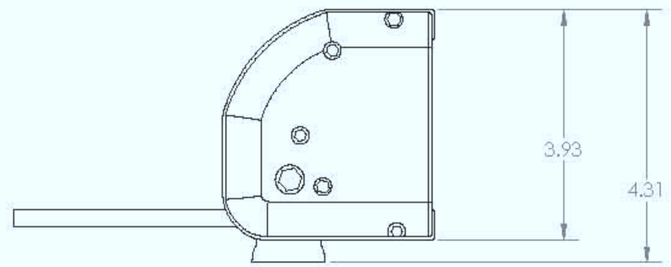

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Magnalight.com. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.		
		MATERIAL	COMMENTS:		
NEXT ASSY	USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING			

Magnalight.com

TITLE:

LEDP10W-120X2E

SIZE	DWG. NO.	REV
C		A

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664



Material Safety Data Sheet

To Whom It May Concern,

The Larson Electronics LLC LEDLB, LED3W, LED5W, LED10W, LEDP, and LEDxxWRE industrial line of LED light bars and light fixtures without emergency battery backup are considered "ARTICLES" under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS). This document does not expire.

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

i. Which is formed to a specific shape or design during manufacture;
ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
iii. Which under normal conditions does not release more than very small quantities.

Regards,

Ray Smith
Larson Electronics, LLC.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: LEDLB, LED3W, LED5W, LED10W, LEDP, and LEDxxWRE Series
Description: LED Light Bars

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The LEDLB, LED3W, LED5W, LED10W, LEDP, and LEDxxWRE series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: LEDLB, LED3W, LED5W, LED10W, LEDP, and LEDxxWRE
Description: LED Light Bars

Evaluated Listings:

CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: LEDLB, LED3W, LED5W, LED10W, LEDP, and LEDxxWRE Series
Description: LED Light Bars

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union ("EU") Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances ("REACH").

REACH does not apply to manufactured products which are referred to as "completed articles". Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: James Thomas

Name: James Thomas
Position: Operations Manager

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs