

EPL-EMG-EXT-3W

Explosion Proof Exit Sign - Class I, Division I - IP65 - 120V/277VAC - Emergency Battery Back-Up

Product ID: 48438



Image: EPL-EMG-EXT-3W

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-EMG-EXT-3W Explosion Proof Exit Sign

Listing: United States & Canada

Lamp Type: LED

Dimensions: 14.8"L x 3.69"W x 16"H

Voltage: 120/277VAC

Watts: 3

Lighting Configuration: Edge Illuminated Sign Panel

Battery Backup Runtime: 3 Hours

Battery Backup: Nickel Cadmium Battery Pack

Materials: Copper Free Aluminum Housing

Mounting: Ceiling Mount, Pendant Mount, Wall Mount

Wiring: 1/2" NPT Wiring Hub

Ratings/Approvals

Class I, Division 1, Groups C & D

Class I, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G

Class III, Division 1

Class I, Zone 1, Groups IIA, IIB

Class I Zone 2, Groups IIA, IIB + H2 & IIC

UL 1598A, 844, 924, Marine Use

IP65, NFPA 101

T6 Temperature Rating

EnergyStar Compliant - Meets/Exceeds Requirements

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-765-7664

E-mail: sales@larsonelectronics.com

Made in the USA

The EPL-EMG-EXT-3W Explosion Proof LED Exit Sign with back up emergency ballast from Larson Electronics is rated Class 1 Division 1 Class II Division I & II and is an ideal emergency exit marking solution for hazardous locations where failsafe reliability is a must.

The exit sign is double sided, and can be seen from both sides.

The EPL-EMG-EXT-3W is an effective option for operators who wish to ensure their hazardous workspaces employ the most up to date and reliable means of marking emergency exit-ways available. Under normal conditions this emergency exit lamp uses normal external power to illuminate its 3 watt LEDs. In the case of power outages or in any situation where power is interrupted, this unit automatically switches to a battery backup which will power the unit for three hours or until power is restored. This fixture has three mounting options and is multi-voltage capable.

Click [here](#) for the non-emergency explosion proof exit sign.

Self-Adhesive Directional Arrows Included - Customer Applied

Adhere to Front/Back for Dual Faced Signs



Exit: Left




Exit: Right/Left




Exit: Right



**Self-Adhesive Arrows
Included**



Click Photo to Enlarge



Click Photo to Enlarge

This emergency exit marking fixture is explosion proof and carries an integral battery backup power supply. When external power is cut due to outages or accidents this lamp automatically switches to its battery backup which will power the lamp for three hours, longer than the requirements specified in the NEC. The EPL-EMG-EXT-3W sign panel is edge illuminated by LEDs and as a result draws only 3 watts of power and has an extreme LED luminary lifespan rated at 25 years. This fixture is approved for outdoor use and is resistant to saltwater making it suitable for use in marine environments.



Dual Side



Single Side





The unit is multi-voltage capable and can operate with 120V-277V/ 60HZ. This fixture can be pendant mounted, ceiling mounted or wall mounted and is constructed of copper-free aluminum. The LEDs in this unit produce very effective panel illumination that will be visible through smoke or obstructions making identification and location of exits in emergency situations easier than with typical self illuminated exit markers.

Made in the USA Quality

1. Uniform LED illumination
2. Battery Replacement Notification Built In
3. Universal 120V through 277VAC Selectable
4. 3 Hour Battery Backup Runtime
5. Copper-free aluminum housing
6. 1/2" NPT conduit hubs
7. Maintenance free
8. 25 Year LED Rated Lifespan
9. Fully Automatic Operation
10. Clear Acrylic Light Guide
11. High Intensity LEDs
12. Low Power Consumption (3 watts)
13. Fully Electronic Circuit Control

Superior LED Benefits

1. Extreme long life.
2. High efficiency and low amp draw.
3. High durability and reliability.
4. Small size and light weight.
5. 100% recyclable.
6. No toxins-lead, mercury.
7. High light output.
8. Consistent color over time.
9. High Versatility.
10. No fragile glass used in construction.
12. Vibration/impact resistant.

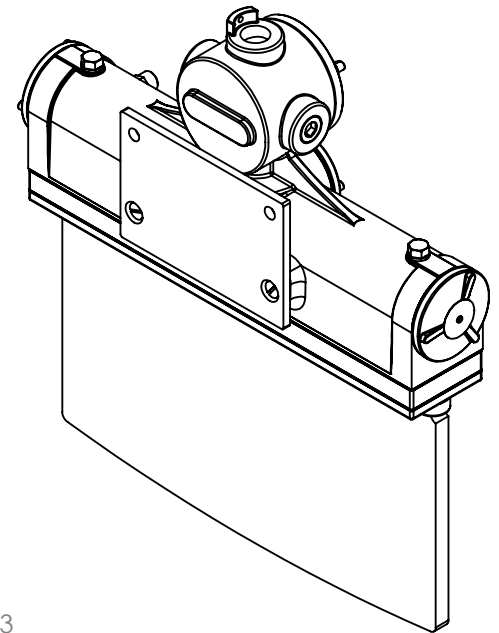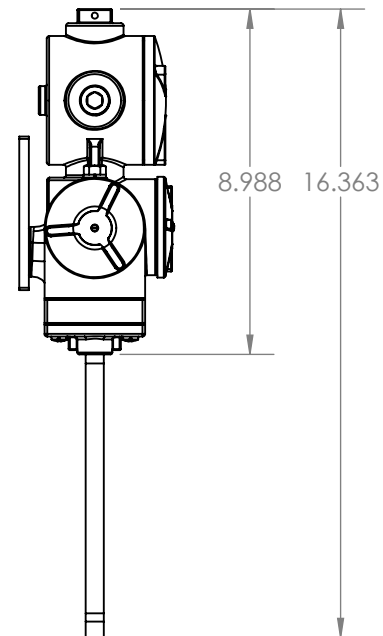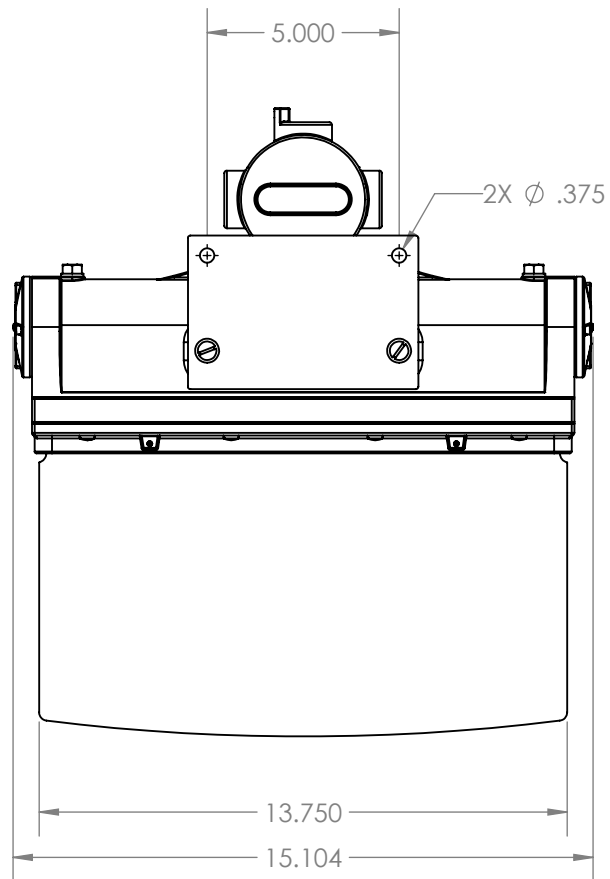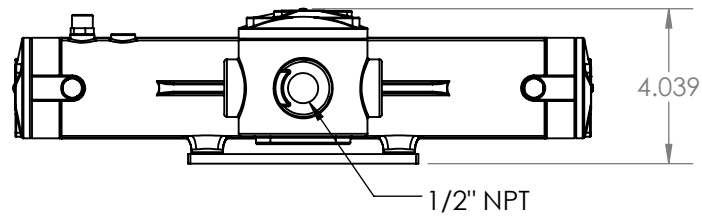

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 LARSON ELECTRONICS LLC. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 LARSON ELECTRONICS LLC IS
 PROHIBITED.

DIMENSIONS ARE IN INCHES		NAME	
MATERIAL		DRAWN	CHRIS THAUER
		CHECKED	JEREMY BLANKENSHIP
DO NOT SCALE DRAWING			

TITLE:			
EPL-EMG-EXT-3W			
SIZE	DWG. NO.	REV	
A			
SCALE: 1:5		SHEET 1 OF 1	



5

4

3

2

1

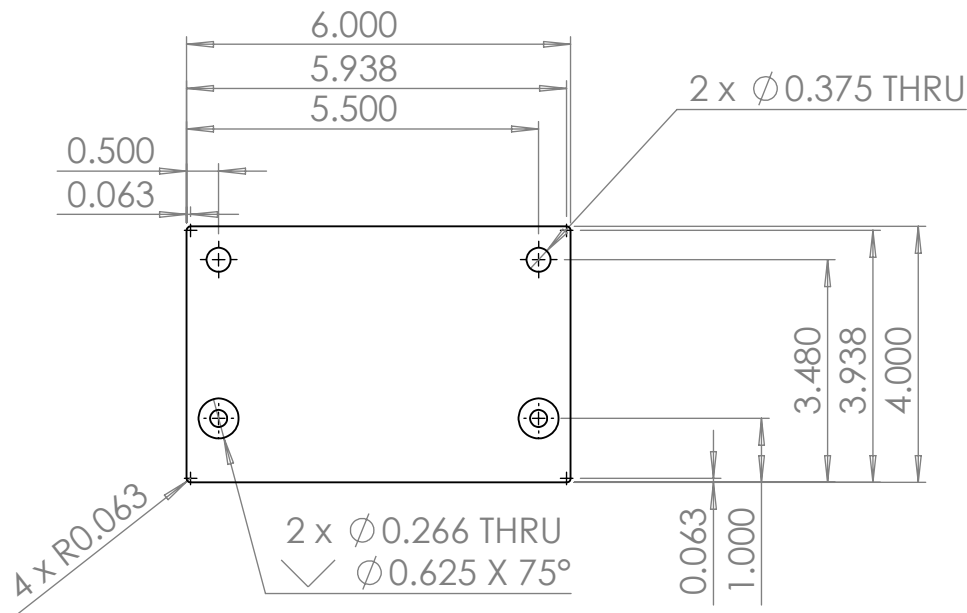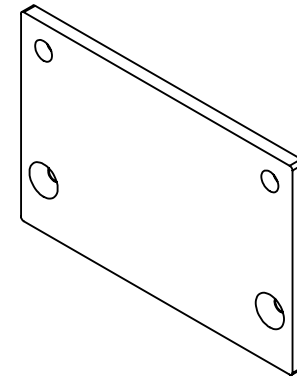

TITLE:
**EPL-EMG-EXT-3W
Mount Plate**

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.

UNLESS OTHERWISE NOTED:

ANGLE: +/- .5
.X +/- .02
.XX +/- .01
.XXX +/- .005

DIMENSIONS ARE IN INCHES				NAME
Quantity	1		DRAWN	Luis Martinez
MATERIAL			CHECKED	N/A
DO NOT SCALE DRAWING			DATE	12/08/2017

SIZE A	DWG. NO.	REV 00
SCALE: NTS		SHEET 2 OF 2

5

4

3

2

1





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671



www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664







Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: EPL-EMG-EXT-3W
Description: Series Explosion Proof
Exit Sign

Evaluated Listings:

UL: FTEV.E119451 – NEC / United States standards
UL: FTEV7.E119451 – CEC / Canada standards

The EPL-EMG-EXT-3W Series is certified to NEC & CEC standards for hazardous locations for:

- NEC: Class I, Divisions 1 & 2, Groups C, D; Class II, Divisions 1 & 2, Groups E, F, G
- CEC: Class I, Divisions 1 & 2, Groups C, D; Class II, Divisions 1 & 2, Groups E, F, G

The EPL-EMG-EXT-3W Series is comprised of a Rig-A-Lite XPEX series device. This device is manufactured to Larson Electronics specifications in regards to color and design. This may include additional external mounting accessories and/or custom mounting of the device. This assembly is built to NEC and CEC standards for hazardous locations.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager

SAFETY DATA SHEET

HCS-2012 APPENDIX D TO §1910.1200

Version 1

Product Name Nickel Cadmium Battery

Issue Date 21-Jan-2015

Revision date 21-Jan-2015

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

Product identifier

Product Name Nickel Cadmium Battery
Chemical Name Nickel Cadmium Battery

Other means of identification

Recommended use of the chemical and restrictions on use

Recommended Use Used in electric tools
Uses advised against No information available

Details of the supplier of the safety data sheet

Supplier Jiangsu Highstar Battery Manufacturing Co.,Ltd.
Address No.306 Heping Road(s), Qidong City, Jiangsu, China
Postal Code 226200
Phone 0086-513-80795666
FAX 0086-513-83312306
E-mail chenj@highstar.net.cn

Emergency telephone number

0086-513-80795666

2. HAZARDS IDENTIFICATION

GHS Classification

Not a dangerous substance or mixture according to the Globally Harmonized System (GHS)

Label elements

Symbols/Pictograms None
Signal word None
Hazard Statements None
Precautionary Statements
Prevention None
Response None
Storage None
Disposal None

Hazards not otherwise classified (HNOC)

No information available

Unknown acute toxicity

.?% of the mixture consists of ingredient(s) of unknown toxicity

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical nature

Mixture

Chemical Name	CAS No	Weight-%
Nickel	7440-02-0	10 - 25
Cadmium and compounds (as Cd)	7440-43-9	10 - 25
Cadmium hydroxide (Cd(OH) ₂)	21041-95-2	12 - 23
Nickel hydroxide	12054-48-7	6 - 14

Iron	7439-89-6	10 - 13
------	-----------	---------

4. FIRST AID MEASURES

Description of first aid measures

General advice	Remove contaminated clothing and shoes. If symptoms persist, call a physician.
Inhalation	Not an expected route of exposure. IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
Skin Contact	Wash hands thoroughly after handling. .
Eye contact	Not an expected route of exposure. .
Ingestion	Rinse mouth Get medical attention Never give anything by mouth to an unconscious person

Most important symptoms and effects, both acute and delayed

No information available.

Indication of any immediate medical attention and special treatment needed

Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Extinguishing media

Suitable extinguishing media	Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Unsuitable extinguishing media	No information available.

Specific hazards arising from the chemical

Thermal decomposition can lead to release of irritating and toxic gases and vapors

Protective equipment and precautions for firefighters

As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

Evacuate personnel to safe areas
Ensure adequate ventilation, especially in confined areas
Remove all sources of ignition
Use personal protection recommended in Section 8

Methods and material for containment and cleaning up

Prevent further leakage or spillage if safe to do so
Pick up and transfer to properly labeled containers

Avoid release to the environment

7. HANDLING AND STORAGE

Precautions for safe handling

Handle in accordance with good industrial hygiene and safety practice
Ensure adequate ventilation, especially in confined areas
Avoid creating dust
Avoid contact with eyes
Wash thoroughly after handling
Use personal protection recommended in Section 8



Conditions for safe storage, including any incompatibilities

Keep containers tightly closed in a dry, cool and well-ventilated place

Keep away from heat

8. EXPOSURE CONTROLS/PERSONAL PROTECTION**Control parameters**

Chemical Name	ACGIH TLV	OSHA PEL	NIOSH IDLH	Denmark	European Union
Nickel (CAS #: 7440-02-0)	TWA: 1.5 mg/m ³ inhalable fraction	TWA: 1 mg/m ³ (vacated) TWA: 1 mg/m ³	IDLH: 10 mg/m ³ IDLH: 10 mg/m ³ Ni TWA: 0.015 mg/m ³ TWA: 0.015 mg/m ³ except Nickel carbonyl Ni	TWA: 0.05 mg/m ³	-
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³ respirable fraction TWA: 0.01 mg/m ³ Cd TWA: 0.002 mg/m ³ Cd respirable fraction	TWA: 0.1 mg/m ³ fume applies to any operations or sectors for which the Cadmium standard is stayed or otherwise not in effect TWA: 0.2 mg/m ³ dust applies to any operations or sectors for which the Cadmium standard is stayed or otherwise not in effect TWA: 5 µg/m ³ (vacated) STEL: 0.3 ppm fume Ceiling: 0.3 mg/m ³ fume applies to any operations or sectors for which the Cadmium standard is stayed or otherwise not in effect Ceiling: 0.6 mg/m ³ dust applies to any operations or sectors for which the Cadmium standard is stayed or otherwise not in effect	IDLH: 9 mg/m ³ dust IDLH: 9 mg/m ³ Cd dust and fume	TWA: 0.005 mg/m ³	-
Cadmium hydroxide (Cd(OH) ₂) (CAS #: 21041-95-2)	TWA: 0.01 mg/m ³ Cd TWA: 0.002 mg/m ³ Cd respirable fraction	-	-	TWA: 0.005 mg/m ³	-
Nickel hydroxide (CAS #: 12054-48-7)	TWA: 0.2 mg/m ³ Ni inhalable fraction	TWA: 1 mg/m ³ Ni (vacated) TWA: 1 mg/m ³ Ni	IDLH: 10 mg/m ³ Ni TWA: 0.015 mg/m ³ except Nickel carbonyl Ni	TWA: 0.05 mg/m ³	-

Chemical Name	Latvia	France	Finland	Germany	Italy
Nickel (CAS #: 7440-02-0)	TWA: 0.05 mg/m ³	TWA: 1 mg/m ³	TWA: 1 mg/m ³ TWA: 0.1 mg/m ³	Skin	-
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	TWA: 0.01 mg/m ³ STEL: 0.05 mg/m ³	TWA: 0.05 mg/m ³	TWA: 0.02 mg/m ³ Skin	Skin	-
Nickel hydroxide (CAS #: 12054-48-7)	TWA: 0.05 mg/m ³	TWA: 1 mg/m ³	TWA: 0.1 mg/m ³	Skin	-

Chemical Name	Poland	Portugal	Spain	Switzerland	Netherlands
Nickel (CAS #: 7440-02-0)	TWA: 0.25 mg/m ³	TWA: 1.5 mg/m ³	TWA: 1 mg/m ³	TWA: 0.5 mg/m ³	-
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³	TWA: 0.01 mg/m ³ TWA: 0.002 mg/m ³	Skin TWA: 0.015 mg/m ³	-
Nickel hydroxide (CAS #: 12054-48-7)	TWA: 0.25 mg/m ³	TWA: 0.2 mg/m ³	TWA: 0.2 mg/m ³	TWA: 0.05 mg/m ³	-

Chemical Name	Norway	United Kingdom	Australia	Austria	Belgium
Nickel (CAS #: 7440-02-0)	TWA: 0.05 mg/m ³ STEL: 0.15 mg/m ³	STEL: 1.5 mg/m ³ TWA: 0.5 mg/m ³	1 mg/m ³	-	-

Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	TWA: 0.05 mg/m ³ STEL: 0.15 mg/m ³	STEL: 0.075 mg/m ³ TWA: 0.025 mg/m ³	0.01 mg/m ³	-	-
Cadmium hydroxide (Cd(OH) ₂) (CAS #: 21041-95-2)	-	-	0.01 mg/m ³	-	-
Nickel hydroxide (CAS #: 12054-48-7)	TWA: 0.05 mg/m ³ STEL: 0.15 mg/m ³	TWA: 0.5 mg/m ³	-	-	-

Appropriate engineering controls

Showers
Eyewash stations
Ventilation systems

Individual protection measures, such as personal protective equipment

Respiratory protection If exposure limits are exceeded or irritation is experienced, NIOSH/MSHA approved respiratory protection should be worn. Positive-pressure supplied air respirators may be required for high airborne contaminant concentrations. Respiratory protection must be provided in accordance with current local regulations.

Hand Protection Wear protective gloves.

Eye/face protection No special technical protective measures are necessary.

Skin and body protection Wear suitable protective clothing.

9. PHYSICAL AND CHEMICAL PROPERTIES**Information on basic physical and chemical properties**

Appearance	Solid
Color	No information available
Odor	Odorless
Odor Threshold	Not determined
pH	Not determined
Melting point/freezing point	Not determined
Boiling point / boiling range	Not determined
Flash point	Not applicable
Evaporation rate	Not determined
Flammability (solid, gas)	Not determined
Flammability Limit in Air	Not determined
Vapor Pressure	Not applicable
Vapor density	Not determined
Density	Not determined
Relative density	Not determined
Bulk density	Not determined
Specific gravity	Not determined
Water solubility	Not determined
Partition coefficient (LogPow)	Not determined
Autoignition temperature	Not determined
Decomposition temperature	Not determined
Kinematic viscosity	Not determined
Dynamic viscosity	Not determined
Explosive properties	Not an explosive
Oxidizing properties	Not determined

Other information

No information available

10. STABILITY AND REACTIVITY**Reactivity**

Stable under recommended storage and handling conditions (see SECTION 7, handling and storage).

Chemical stability

Stable under normal conditions

Possibility of Hazardous Reactions

None under normal processing

Conditions to avoid

Strong heating. Incompatible materials

Incompatible materials

Strong acids Strong bases Strong oxidizing agents

Hazardous Decomposition Products

None known based on information supplied

11. TOXICOLOGICAL INFORMATION**Information on likely routes of exposure**

Inhalation Inhalation of vapors in high concentration may cause irritation of respiratory system
 Eye contact Contact with eyes may cause irritation
 Skin Contact Substance may cause slight skin irritation
 Ingestion may cause irritation to mucous membranes

Information on toxicological effects**Acute toxicity**

Chemical Name	Oral LD50	Dermal LD50	Inhalation LC50
Nickel (CAS #: 7440-02-0)	> 9000 mg/kg (Rat)	-	-
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	= 2330 mg/kg (Rat)	-	= 25 mg/m ³ (Rat) 30 min
Nickel hydroxide (CAS #: 12054-48-7)	-	-	= 1200 mg/m ³ (Rat) 4 h
Iron (CAS #: 7439-89-6)	98.6 g/kg bw (rat)	-	-

Skin corrosion/irritation

Non-irritating to the skin

Serious eye damage/eye irritation

No eye irritation

Sensitization

No information available

Germ cell mutagenicity

No information available

Carcinogenicity

This product does not contain any carcinogens or potential carcinogens as listed by OSHA, IARC or NTP

Chemical Name	ACGIH	IARC	NTP	OSHA
Nickel (CAS #: 7440-02-0)	-	Group 2B	Known Reasonably Anticipated	X
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	A2	Group 1	Known	X
Cadmium hydroxide (Cd(OH) ₂) (CAS #: 21041-95-2)	A2	-	-	-
Nickel hydroxide (CAS #: 12054-48-7)	A1	Group 1	Known	X

Reproductive toxicity

No information available

STOT - single exposure

No information available

STOT - repeated exposure

No information available

Aspiration hazard

No information available

12. ECOLOGICAL INFORMATION**Ecotoxicity**

Chemical Name	Algae/aquatic plants EC50	Fish LC50	Crustacea EC50
Nickel (CAS #: 7440-02-0)	0.18 mg/L/72h Pseudokirchneriella subcapitata 0.174 - 0.311 mg/L/96h Pseudokirchneriella subcapitata static	100 mg/L/96h Brachydanio rerio 1.3 mg/L/96h Cyprinus carpio semi-static 10.4 mg/L/96h Cyprinus carpio static	100 mg/L/48h Daphnia magna 1 mg/L/48h Daphnia magna Static
Cadmium and compounds (as Cd) (CAS #: 7440-43-9)	-	0.003: 96 h Oncorhynchus mykiss mg/L LC50 flow-through 0.006: 96 h Oncorhynchus mykiss mg/L LC50 static 0.002: 96 h Cyprinus carpio mg/L LC50 4.26: 96 h Cyprinus carpio mg/L LC50 semi-static 0.24: 96 h Cyprinus carpio mg/L LC50 static 21.1: 96 h Lepomis macrochirus mg/L LC50 flow-through 0.016: 96 h Oryzias latipes mg/L LC50 0.0004 - 0.003: 96 h Pimephales promelas mg/L LC50	0.0244: 48 h Daphnia magna mg/L EC50 Static
Iron (CAS #: 7439-89-6)	-	-	> 100 mg/L/48h (Daphnia magna)

Persistence and degradability

No information available

Bioaccumulative potential

No information available

Mobility in soil

No information available

Other adverse effects

No information available

13. DISPOSAL CONSIDERATIONS**Waste treatment methods**

Disposal of wastes

Disposal should be in accordance with applicable regional, national and local laws and regulations

Contaminated packaging

Dispose of in accordance with federal, state and local regulations

Chemical Name	RCRA	RCRA - Basis for Listing	RCRA - D Series Wastes	RCRA - U Series Wastes
---------------	------	--------------------------	------------------------	------------------------

Nickel 7440-02-0	-	Included in waste streams: F006, F039	-	-
Cadmium and compounds (as Cd) 7440-43-9	-	Included in waste streams: F006, F039, K061, K069, K100	1.0 mg/L regulatory level	-
Chemical Name		California Hazardous Waste Status		
Nickel 7440-02-0		Toxic powder Ignitable powder		

14. TRANSPORT INFORMATION

It is considered as non-dangerous good by the ICAO, IATA, IMDG and TDG.

According to IATA DGR 56th Edition for transportation and International Maritime Dangerous Goods (IMDG Code 36th) and the Recommendation on the Transportation of Dangerous Goods-Model Regulation (18th)

The products are not subjects/subject to dangerous.

DOT / IMDG / IATA

UN/ID No.	Not regulated
Proper shipping name	Not regulated
Hazard Class	Not regulated
Packing Group	Not regulated
Special precautions	No information available
Marine pollutant	Not applicable

15. REGULATORY INFORMATION

International Inventories

Component	AICS	DSL/NDL	EINECS/ELI NCS	ENCS	IECSC	KECL	PICCS	TSCA
Nickel 7440-02-0 (10 - 30)	X	X	X	-	X	X	X	X
Cadmium and compounds (as Cd) 7440-43-9 (10 - 30)	X	X	X	-	X	X	X	X
Cadmium hydroxide (Cd(OH) ₂) 21041-95-2 (10 - 30)	X	X	-	-	X	-	-	-
Nickel hydroxide 12054-48-7 (10 - 30)	X	X	X	X	X	X	X	X
Iron 7439-89-6 (10 - 30)	X	X	X	-	X	X	X	X

"-" Not Listed

"X" Listed

US Federal Regulations

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372

Chemical Name	SARA 313 - Threshold Values %
Nickel - 7440-02-0	0.1
Cadmium and compounds (as Cd) - 7440-43-9	0.1
Nickel hydroxide - 12054-48-7	0.1

SARA 311/312 Hazard Categories

Does not apply

CWA (Clean Water Act)

This product contains the following substances which are regulated pollutants pursuant to the Clean Water Act (40 CFR 122.21 and 40 CFR 122.42)

Chemical Name	CWA - Reportable Quantities	CWA - Toxic Pollutants	CWA - Priority Pollutants	CWA - Hazardous Substances
Nickel 7440-02-0	-	X	X	-
Cadmium and compounds (as Cd) 7440-43-9	-	X	X	-
Cadmium hydroxide (Cd(OH) ₂) 21041-95-2	-	X	-	-
Nickel hydroxide 12054-48-7	-	X	-	X

CERCLA

This material, as supplied, contains one or more substances regulated as a hazardous substance under the Comprehensive Environmental Response Compensation and Liability Act (CERCLA) (40 CFR 302)

Chemical Name	Hazardous Substances RQs	CERCLA/SARA RQ	Reportable Quantity (RQ)
Nickel 7440-02-0	100 lb	-	RQ 100 lb final RQ RQ 45.4 kg final RQ
Cadmium and compounds (as Cd) 7440-43-9	10 lb	-	RQ 10 lb final RQ RQ 4.54 kg final RQ
Nickel hydroxide 12054-48-7	10 lb	-	RQ 10 lb final RQ RQ 4.54 kg final RQ

US State Regulations**California Proposition 65**

This product contains the following Proposition 65 chemicals

Chemical Name	California Proposition 65
Nickel - 7440-02-0	Carcinogen
Cadmium and compounds (as Cd) - 7440-43-9	Carcinogen Developmental Male Reproductive
Cadmium hydroxide (Cd(OH) ₂) - 21041-95-2	Carcinogen
Nickel hydroxide - 12054-48-7	Carcinogen

U.S. State Right-to-Know Regulations

This product may contain substances regulated by state right-to-know regulations

Chemical Name	New Jersey	Massachusetts	Pennsylvania
Nickel 7440-02-0	X	X	X
Cadmium and compounds (as Cd) 7440-43-9	X	X	X
Nickel hydroxide 12054-48-7	X	X	X

16. OTHER INFORMATION**Revision Note**

Issue Date 21-Jan-2015
Revision date 21-Jan-2015
Revision Note Not applicable

Key or legend to abbreviations and acronyms used in the safety data sheet

TWA - TWA (time-weighted average)
STEL - STEL (Short Term Exposure Limit)
Ceiling - Maximum limit value
TSCA - United States Toxic Substances Control Act Section 8(b) Inventory

DSL/NDSL - Canadian Domestic Substances List/Non-Domestic Substances List

EINECS/ELINCS - European Inventory of Existing Chemical Substances/European List of Notified Chemical Substances

ENCS - Japan Existing and New Chemical Substances

IECSC - China Inventory of Existing Chemical Substances

KECL - Korean Existing and Evaluated Chemical Substances

PICCS - Philippines Inventory of Chemicals and Chemical Substances

AICS - Australian Inventory of Chemical Substances

Disclaimer

The information provided in this Material Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

----- End of Safety Data Sheet -----

FTEV.E119451 - Emergency Lighting and Power Equipment for Use in Hazardous Locations

Emergency Lighting and Power Equipment for Use in Hazardous Locations

[See General Information for Emergency Lighting and Power Equipment for Use in Hazardous Locations](#)

RIG-A-LITE PARTNERSHIP LTD

E119451

8500 HANSEN RD

HOUSTON, TX 77075-1006 USA

Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III Hazardous Locations, emergency lighting units. Model(s) CHL or EXCHL followed by 04 or 07; followed by L; followed by C or D; followed by 2 or 4; followed by A, B, C, or U; may be followed by FB, SC, SMK, WMB, ADJ, EM, 30, 35 or 50; followed by any six alpha digits A through Z for commercial purposes. +

Class I, Groups A, B, C and D, Division 2 only; Class II, Groups F and G, Division 2 only, unit equipment, 12 volts, Model(s) HLEL100N12#, HLEL100N122H1212#, HLEL100N122H128#, HLEL100N122T1218#, HLEL100N122T1225#, HLEL100N122T128#, HLEL100N123H1212#, HLEL100N123H128#, HLEL100N123T1218#, HLEL100N123T1225#, HLEL100N123T128#, HLEL100S12#, HLEL100S122H1212#, HLEL100S122H128#, HLEL100S122T1218#, HLEL100S122T1225#, HLEL100S122T128#, HLEL100S123H1212#, HLEL100S123H128#, HLEL100S123T1218#, HLEL100S123T1225#, HLEL100S123T128#, HLEL125N12#, HLEL125N122H1212#, HLEL125N122H128#, HLEL125N122T1218#, HLEL125N122T1225#, HLEL125N122T128#, HLEL125N123H1212#, HLEL125N123H128#, HLEL125N123T1218#, HLEL125N123T1225#, HLEL125N123T128#, HLEL125S12#, HLEL125S122H1212#, HLEL125S122H128#, HLEL125S122T1218#, HLEL125S122T1225#, HLEL125S122T128#, HLEL125S123H1212#, HLEL125S123H128#, HLEL125S123T1218#, HLEL125S123T1225#, HLEL125S123T128#, HLEL150N12#, HLEL150N122H1212#, HLEL150N122H128#, HLEL150N122T1218#, HLEL150N122T1225#, HLEL150N122T128#, HLEL150N123H1212#, HLEL150N123H128#, HLEL150N123T1218#, HLEL150N123T1225#, HLEL150N123T128#, HLEL25N12#, HLEL25N122H1212#, HLEL25N122H128#, HLEL25N122T128#, HLEL25N123H128#, HLEL25N123T128#, HLEL25S12#, HLEL25S122H1212#, HLEL25S122H128#, HLEL25S122T128#, HLEL25S123H128#, HLEL25S123T128#, HLEL50N12#, HLEL50N122H1212#, HLEL50N122H128#, HLEL50N122T1218#, HLEL50N122T1225#, HLEL50N122T128#, HLEL50N123H1212#, HLEL50N123H128#, HLEL50N123T128#, HLEL50S12#, HLEL50S122H1212#, HLEL50S122H128#, HLEL50S122T1218#, HLEL50S122T1225#, HLEL50S122T128#, HLEL50S123H1212#, HLEL50S123H128#, HLEL50S123T128#, HLEL75N12#, HLEL75N122H1212#, HLEL75N122H128#, HLEL75N122T1218#, HLEL75N122T1225#, HLEL75N122T128#, HLEL75N123H1212#, HLEL75N123H128#, HLEL75N123T1218#, HLEL75N123T1225#, HLEL75N123T128#

Class I, Groups A, B, C and D, Division 2 only; Class II, Groups F and G, Division 2 only, unit equipment, 6 volts, Model(s) HLEL25N6#, HLEL25N62H612#, HLEL25N62H68#, HLEL25N62T68#, HLEL25N63H68#, HLEL25N63T68#, HLEL25S6#, HLEL25S62H612#, HLEL25S62H68#, HLEL25S62T68#, HLEL25S63H68#, HLEL25S63T68#, HLEL50N6#, HLEL50N62H612#, HLEL50N62H68#, HLEL50N62T618#, HLEL50N62T625#, HLEL50N62T68#, HLEL50N63H612#, HLEL50N63H68#, HLEL50N63T68#, HLEL50S6#, HLEL50S62H612#, HLEL50S62H68#, HLEL50S62T618#, HLEL50S62T625#, HLEL50S62T68#, HLEL50S63H612#, HLEL50S63H68#, HLEL50S63T68#, HLEL75N6#, HLEL75N62H612#, HLEL75N62H68#, HLEL75N62T618#, HLEL75N62T625#, HLEL75N62T68#, HLEL75N63H612#, HLEL75N63H68#, HLEL75N63T618#, HLEL75N63T625#, HLEL75N63T68#

Class I, Groups A, B, C and D, Division 2, emergency fluorescent luminaires, Model(s) RSA, RSC or RSS, followed by 265, 380, 425, 430, 460 or 800, followed by 2 or 4, followed by 1, 2 or 4, followed by A to H, or U, followed by EM, may be followed by EL, F, R or TB.

Class I, Groups A, B, C and D, Division 2, emergency lighting equipment, Model(s) HZALJ followed by 04, 06, 08, 10, 11, 13, AM5 or AM4; followed by L; followed by U; followed by CG, FG, or CP; may be followed by 1, 3 or W; may be followed by G; may be followed by P, P1, C, C1, W, W1, T, T1, S, S1, L, or L1; may be followed by SC, 30, 40; followed by EM; may be followed by four additional alpha-numeric characters.+

Class I, Groups A, B, C and D, Division 2, emergency lighting units, Model(s) RFL or MFL, followed by 265, 425, 430, T5 or T5HO, followed by 14, 22 or 24, followed by 2, 3, 4 or 6, followed by F, G or S, followed by A to G or U, followed by EM, may be followed by EL, F, R or Z.+

Class I, Groups A, B, C and D, Division 2: Class II, Groups E, F and G; Class III, emergency lighting units, Model(s) SAF or SAFR, followed by 26, 32, 42, 52, 64 or 84, followed by F, followed by 12, 22, 24, 27, 34 or U, followed by G, GG, R2, R2G, R3, R3G, R5, R5G, T1, T1G, T3, T3G, T5, T5G, followed by C, C1, F, F1, K, K1, P, P1, S, S1, L, L1, W, W1, followed by EM, EMO, FB, FI, SS or T.

Class I, Groups A, B, C and D, Division 2: Class II, Groups F and G; Class III, emergency lighting units, Model(s) HEF, followed by 265, 425, 430, 800, T5 or T5HO, followed by 2L, 3L, 4L or 6L, may be followed by TM, AC or PL, may be followed by A, B, C or U, may be followed by EM or EMO.

Class I, Groups C and D, Class II, Groups E, F and G; and Class III Hazardous Locations., Model(s) Cat. No. XML or EXML followed by 04, 05, 06, 07, 09, 11 or 14; followed by L; followed by C or D; followed by 2 or 4; followed by A, B, C, or U; followed by EM, MB, PB, RIG, SC, 30, 35 or 50.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEH, followed by 1 or 2, followed by G or R, followed by DT or 24, followed by 0, 1, or 2, followed by 0, 1 or 2, may be followed by M, N or W, may be followed by X+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEL, followed by U, followed by 0, 1, or 2, followed by 0, 1 or 2, may be followed by M, N or W, may be followed by XX+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEX, followed by 1 or 2, followed by R or G, may be followed by AR, AL, AA or LR, followed by DT, followed by WP or EB, may be followed by EM+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency lighting units, Model(s) SXP and SXPJ, followed by 26, 32, 42, 52, 64 or 84, followed by F, followed by U or 12, followed by G or GG, followed by P, P1, C, C1, S, S1, T, W or W1, followed by EM or EMO, may be followed by F

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, unit equipment, Model(s) Class I, Groups C and D, Division 1; Class I, Groups A, B, C and D, Division 2; Class II, Groups E, F and G, Division 1; and Class III, emergency LED luminaire, XP, followed by 30L, 50L, 70L, 75L, 100L, 105L or 140L, followed by 2 or 4, followed by 2L, 3L or 4L, followed by U, followed by EM or EMO, followed by OB and/or F, the use of a dash - is optional.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, unit equipment, Model(s) XP, followed by 265, 425, 430, 800, T5, T5HO or 1500, followed by 2 or 4, with or without suffix 2L, 3L or 4L, followed by A, B, C, D, H or V, followed by EM or EMO.

Emergency lighting units, Model(s) MAR or MARII, followed by 265, 425, 430 or 800, followed by 2 or 4.

- May be followed by A, SD, ASD, TD or V.

+ - Complimentary Listed Under IGTC.

Last Updated on 2020-11-03

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2020 UL LLC"

UL Product **iQ**[™]



FTEV7.E119451 - Emergency Lighting and Power Equipment for Use in Hazardous Locations Certified for Canada

Emergency Lighting and Power Equipment for Use in Hazardous Locations Certified for Canada

See General Information for Emergency Lighting and Power Equipment for Use in Hazardous Locations Certified for Canada

RIG-A-LITE PARTNERSHIP LTD

E119451

8500 HANSEN RD

HOUSTON, TX 77075-1006 USA

Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G; Class III Hazardous Locations, emergency lighting units, Model(s) CHL or EXCHL followed by 04 or 07; followed by L; followed by C or D; followed by 2 or 4; followed by A, B, C, or U; may be followed by FB, SC, SMK, WMB, ADJ, EM, 30, 35 or 50; followed by any six alpha digits A through Z for commercial purposes. +

Class I, Groups A, B, C and D, Division 2, emergency lighting equipment, Model(s) HZALJ followed by 04, 06, 08, 10, 11, 13, AM5 or AM4; followed by L; followed by U; followed by CG, FG, or CP; may be followed by 1, 3 or W; may be followed by G; may be followed by P, P1, C, C1, W, W1, T, T1, S, S1, L, or L1; may be followed by SC, 30, 40; followed by EM; may be followed by four additional alpha-numeric characters.+

Class I, Groups C and D, Class II, Groups E, F and G; and Class III Hazardous Locations., Model(s) Cat. No. XML or EXML followed by 04, 05, 06, 07, 09, 11 or 14; followed by L; followed by C or D; followed by 2 or 4; followed by A, B, C, or U; followed by EM, MB, PB, RIG, SC, 30, 35 or 50.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEH, followed by 1 or 2, followed by G or R, followed by DT or 24, followed by 0, 1, or 2, followed by 0, 1 or 2, may be followed by M, N or W, may be followed by X+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEL, followed by U, followed by 0, 1, or 2, followed by 0, 1 or 2, may be followed by M, N or W, may be followed by XX+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, emergency exit light, Model(s) XPEX, followed by 1 or 2, followed by R or G, may be followed by AR, AL, AA or LR, followed by DT, followed by WP or EB, may be followed by EM+ or SD.

Class I, Groups C and D, Division 1, Class II, Groups E, F and G, Division 1, and Class III, unit equipment, Model(s) Class I, Groups C and D, Division 1; Class I, Groups A, B, C and D, Division 2; Class II, Groups E, F and G, Division 1; and Class III, emergency LED luminaire, XP, followed by 30L, 50L, 70L, 75L, 100L, 105L or 140L, followed by 2 or 4, followed by 2L, 3L or 4L, followed by U, followed by EM or EMO, followed by OB and/or F, the use of a dash - is optional.

+ - Complimentary Listed Under IGTC.

Last Updated on 2020-11-03

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2020 UL LLC"



Frequently Asked Questions (FAQ)

There are no Faqs