

HALD-48-2X150LED

Low Profile Explosion Proof LED Light - 2x4 Lay-In Troffer Class 1/2 Div 1/2 Paint Spray Booth Rated

Product ID: 71250



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

HALD-48-2X150LED HAZLOC Lay-In Panel Mount Light

Listing: United States - Canada

Lamp Type: Cree LED

Dimensions: 48"-L x 24"-W x D-5.38"

Flange Dimensions: 48"-L x 24"-W

Weight: 75 lbs

Voltage: 100-277 Volts AC, 50/60Hz or 11-25 Volts AC/DC

Total Watts: 300W

Total Lumens: 35,000

Luminous Efficacy: 116.67 Lm/W

Lamp Life: 60,000+ Hours

Color Temp: 5000K, 4000K, 3000K

Color Rendering Index: >75 CRI

Beam Angle: 60° or 125°

Lighting Configuration: Flood Pattern

Power Efficiency: >95%

Mounting: Recessed Panel Mounting

Power Factor: 0.992

Ambient Operating Temp Range: -50° C to +65°C

Operating Temp Rating: T5

Housing Material: Steel

Housing Finish: Powder Coated - White

Lens Material: Polycarbonate

Mounting: Recessed Panel Mounting

Wiring Hub: 3/4" NPT

Ratings/Approvals

Listed for United States and Canada

Class I, Divisions 1 & 2, Groups C and D

Class II, Divisions 1 & 2, Groups E,F,G

Class III, Divisions 1 & 2

Certified to UL 844 Ed. 13

Certified to UL 1598

Certified to C22.2 No. 137 Rev 2009

Certified to C22.2 No. 250.0

Certified to C22.2 No. 30-M-1986 Rev 2012

T5 Temperature Rating

Paint Spray Booth Approved

IEC 60529 Tested

IP67 Rated Waterproof

LEL Approved

Multiple Driver Banks

80% Lumen Retention after 60,000 Hours

Factory Sealed Light Fixture

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The Larson Electronics HALD-48-2X150LED Hazardous Area LED Light Fixture is designed to provide operators with a powerful and energy efficient alternative to traditional hazardous location luminaries. This LED panel mount fixture is ETL listed Class 1 Division 2, Class 2 Divisions 1 & 2, and is approved for use within paint spray booths. Cree LED technology and compact design makes this lamp an excellent replacement upgrade option for paint booths and hazardous locations where flammable chemical/petrochemical vapors are present.

*****PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO THIS HAZARDOUS LOCATION LIGHT FIXTURE*****

The HALD-48-2X150LED Explosion Proof fixture is a 2x4 Class 1 Division 2 hazardous location lay-in LED light fixture and is ideal for use in paint spray booths and hazardous environments where space for lighting fixtures is limited. This fixture is T5 temperature rated and is a fully integrated LED unit. The LED assembly is protected by an aluminum framed, hinged, 3/16" thick polycarbonate door that provides direct front access to the internal components. The lamp housing is designed for recessed mounting, and is constructed of non-sparking aluminum coated with a powder coated white finish.



[Click Photo to Enlarge](#)



[Click Photo to Enlarge](#)



[Click Photo to Enlarge](#)

This Class 1 Division 2, Class 2 Division 1 & 2 explosion proof light fixture provides 35,000 of high quality light while drawing only 300 watts. The copper free aluminum alloy body is powder coated for added durability and an attractive aesthetic appearance. Special heat dissipating design in conjunction with LED technology helps this fixture to achieve an excellent 60,000 hour rated lifespan with 80% lumen retention. Light weight and a low profile make this unit an attractive alternative to larger and heavier older fixtures and requires less hardware to install.

The integrated LED assembly in this unit features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twenty-four individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.

This light is multi-voltage capable and can be operated with 100-277 VAC, 50/60Hz without any need for a special ballast. The aluminum body and LED lamp give this light excellent durability and resistance to vibration and impacts. The housing is specially designed to dissipate heat which increases the efficiency and lifespan of the LED luminaries. The LED lamp produces 35,000 lumens with a color temperature of 5000K, 4000K, or 3000K and a color rendering index of 75 which produces colors and details much more accurately than high pressure sodium or mercury vapor luminaries.

Mounting: This fixture is designed for recessed mounting and requires a mounting hole to be made in booth panels capable of accommodating the fixture housing in order to provide the maximum amount of space in paint spray booth enclosures. Once mounted, this fixture's door frame will extend 3/8" into the spray booth.

Applications: Paint spray booths and enclosed spaces where flammable chemical/petrochemical vapors are present.


1. Low power consumption.
2. Fixture arrives assembled and lamped to reduce installation time and cost.
3. Instant on/off operation.
4. Fixture constructed of welded corrosion resistant copper free aluminum alloy.
5. 3/4" Wiring hubs
6. Superior color rendering compared to HPS, LPS, MH.
7. Retains 80% lumen output after 60,000 operating hours.
8. Powder coated aluminum fixture body.
9. Low profile - Light weight
10. 35,000 Lumen output from only 300 watts
1. 60,000 hour lifespan.
2. Can SAVE 50% or more on energy.
3. Qualifies retrofit projects for financial incentives, including utility rebates, tax credits and energy loan programs.
4. Reduces energy use and prolongs life-spans of peripheral cooling units (A/C, refrigeration)
5. 100% recyclable.
6. No toxins-lead, mercury.
7. No UV light, infrared radiation or CO2 emissions.
8. Qualifies buildings for LED and other sustainable business certifications.
9. Bright, even light maintains consistent color over time.
10. Instant on/off – No flickering, delays or buzzing.
11. Very good color rendering.
12. Vibration/impact resistant.
13. Significantly cooler operation.
14. Less frequent outages, higher output improves workplace safety.

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

HALD-48-2X150LED-1227-125B-40K




CUSTOMER SUPPLIED
UTILITY
120-277VAC
150W MAX FOR SINGLE
300W MAX FOR BOTH

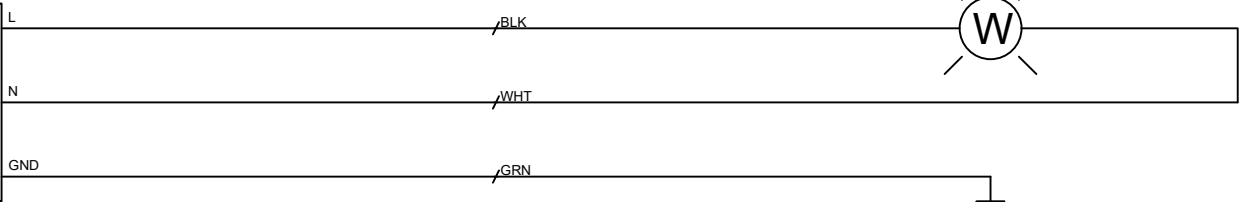

CABLE COMES WITH FIXTURE

CUSTOMER SUPPLIED
UTILITY
120-277VAC
150W MAX FOR SINGLE
300W MAX FOR BOTH

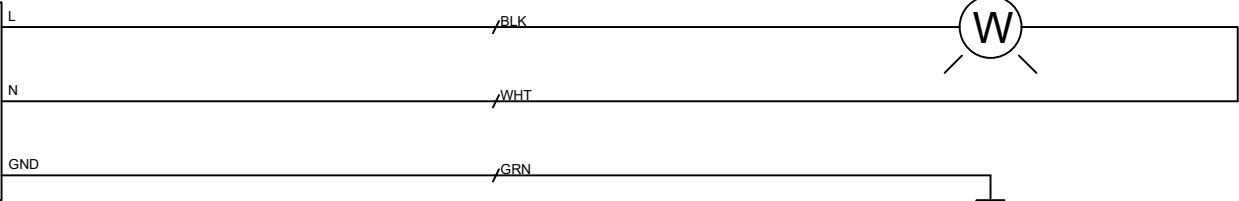





TAGS	QTY	CATALOG	DESCRIPTION
LT1-101.05 LT1-101.12	2	UNV00007993	150W EXP LED 1227V 125B 4000K



**LARSON
ELECTRONICS**

9419 E US HWY 175,
KEMP, TX 75143

TITLE HALD-48-2X150LED-1227-125B-40K		
DRAWN BY K.NGUYEN	DATE 07/08/2022	REV A
CHECKED BY S.DESAI	SHEET # 1 OF 1	DRAWING # 101

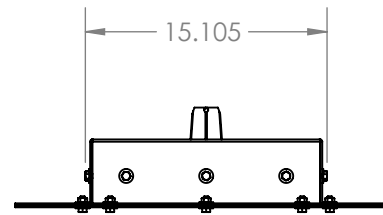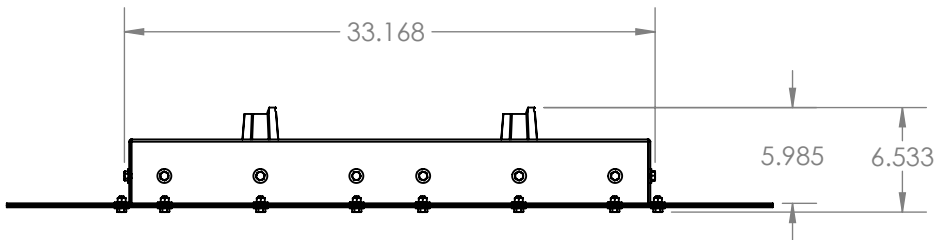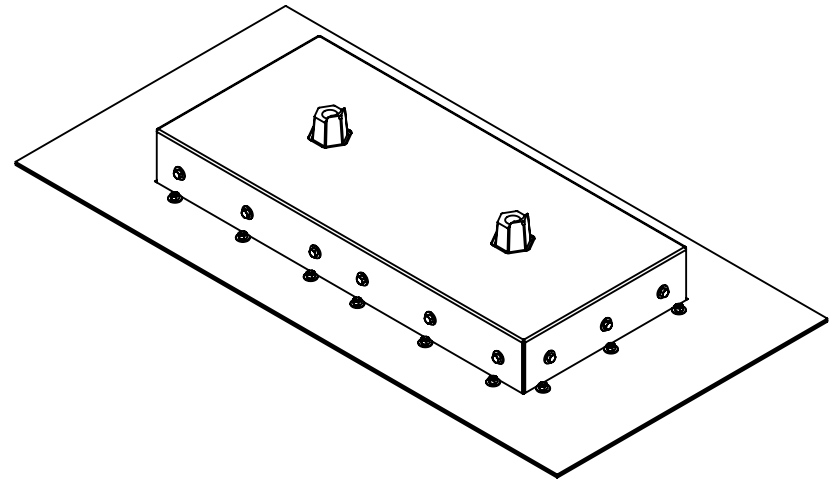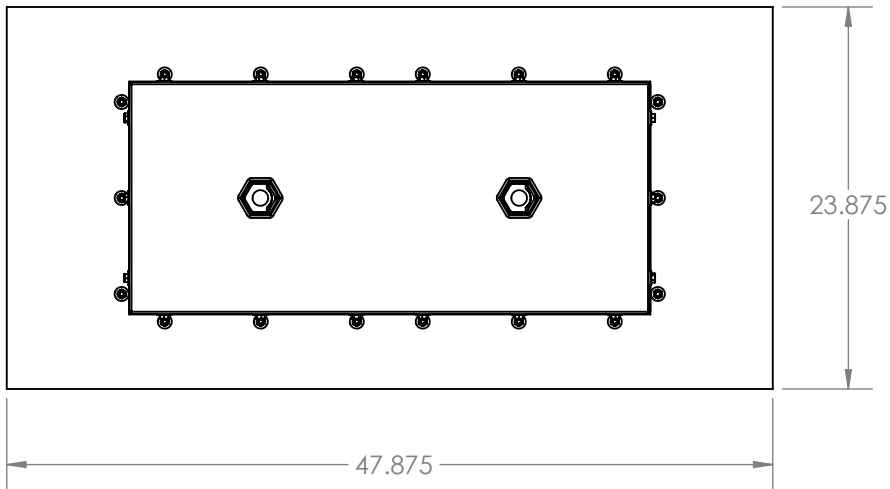

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LARSON ELECTRONICS LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LARSON ELECTRONICS LLC IS PROHIBITED.


DIMENSIONS ARE IN INCHES		DRAWN		NAME	
MATERIAL		CHECKED		CHRIS THAUER	
DO NOT SCALE DRAWING				JEREMY BLANKENSHIP	

TITLE:					
HALD-48-2X150LED					
SIZE	DWG. NO.			REV	
A					
SCALE: 1:12				SHEET 1 OF 1	







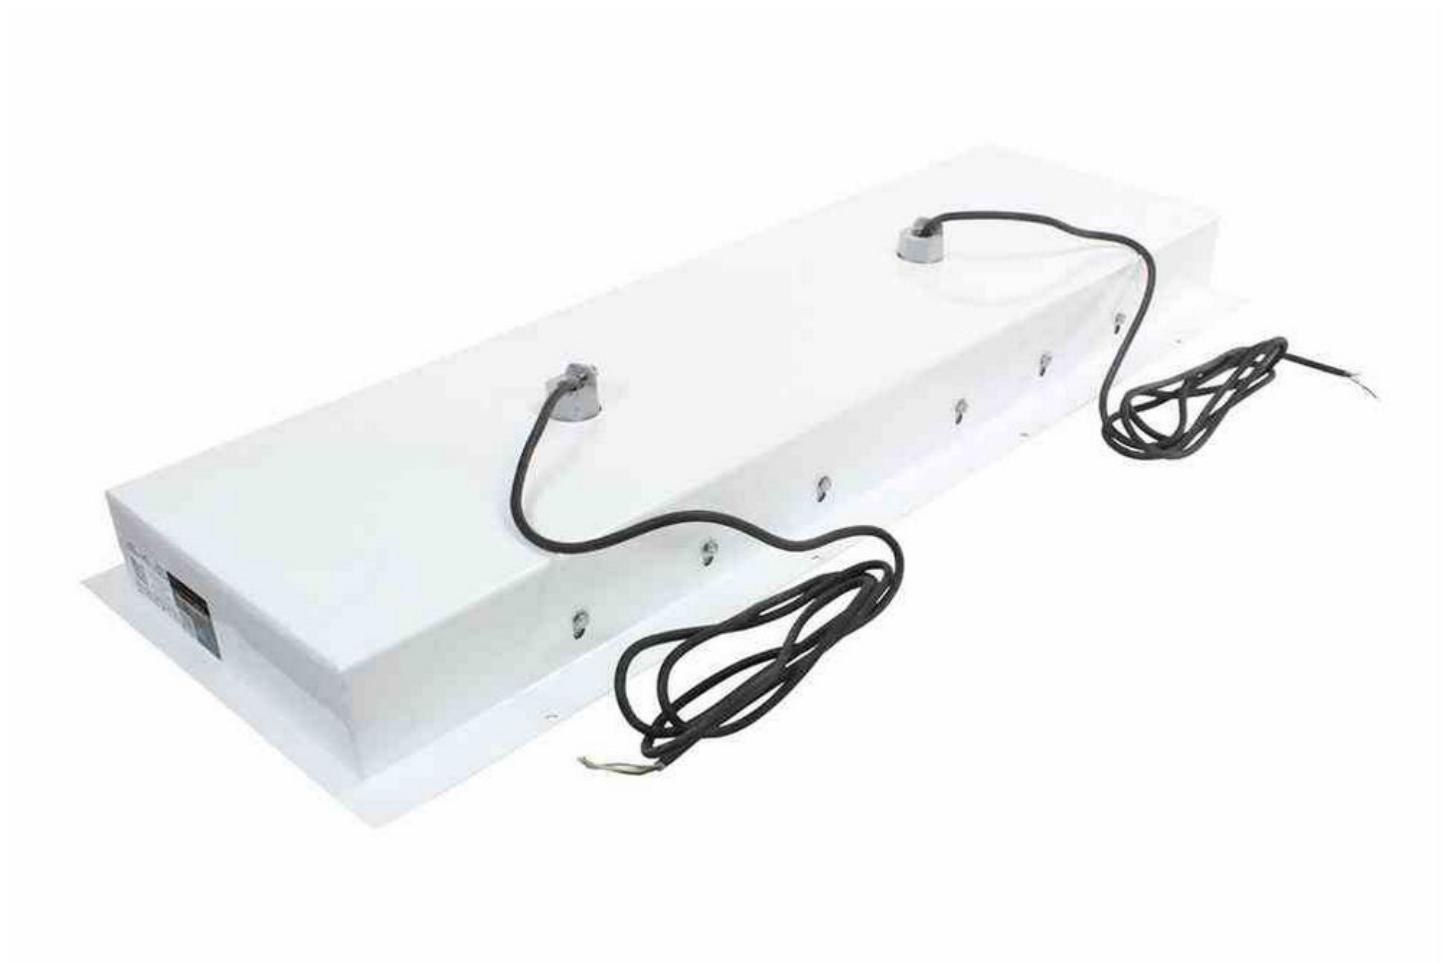



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: HALD-XX-150LED, HALD-XX-150LED Series
Description: Explosion Proof Portable LED Light

Evaluated Listings:

ETL: NEC / United States standards

ETL: CEC / Canada standards

ETL: Modifications to under UL 1203, UL 508A – NEC / United States standards

ETL: Modifications to under CSA C22.2 No. 14, No. 30, No. 25– CEC / Canadian standards

The HALD-XX-150LED, HALD-XX-150LED Series is certified to NEC, CEC, ATEX, and IEC Ex standards for hazardous locations for:

- NEC: Class I, Divisions 1&2, Groups , D; Class II, Divisions 1&2, Groups E, F, G
- CEC: Class I, Divisions 1&2, Groups C, D; Class II, Divisions 1&2, Groups E, F, G

The HALD-XX-150LED, HALD-XX-150LED Series is comprised of an EPL-HB-150LED-RT series LED light assembly. There may be multiple light assemblies present. The light assembly may be fitted with external wiring device box and/or accessories, portable power cord, and plug attachment that utilize components listed for hazardous locations. The light head assembly may be mounted to a non-sparking aluminum or galvanized steel structure. This assembly is built to NEC and CEC standards for hazardous locations per UL 1203 and CSA C22.2 No 30, No. 25.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager

[<- Back](#)

Product Description

Title: INDUSTRIAL CONTROL PANELS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Industrial Control Panels For General Use.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Panels (UL-508A) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: EXPLOSION-PROOF & DUST IGNITION-PROOF ELECTRICAL EQUIPMENT FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Explosion-proof or dust-ignition-proof Industrial Control Panels for use in Hazardous (Classified) Locations, Model Nos. Custom Industrial Control Panels

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Explosion-Proof and Dust Ignition-Proof Electrical Equipment for Use in Hazardous (Classified) Locations (UL-1203) and are identified with the ETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: INDUSTRIAL CONTROL EQUIPMENT
Company: LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information: Industrial Control Panels For General Use.
Industrial Control Panels Relating to Hazardous (Classified) Locations, Custom Industrial Control Panels.

Power Distribution System, Model Nos. MGL, MPD, MGS series;
Followed by AAK-PBB.FFF-SCC.GGG-EEXCCC.DDD; Where AA = 2,3,5,7,9,15,20,25,30,45,50,75; BB = 1P, 3P; FFF = 480,240,208,120; CC = 1P,3P; GGG = 480,240,208,120; EE = # of outlets; CCC = voltage; DDD = outlet amperage.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Industrial Control Equipment (CAN/CSA-C22.2 No. 14) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: ENCLOSURES
Company: LARSON ELECTRONICS LLC - Kemp, TX USA
Product Information: Explosion-proof or dust-ignition-proof Industrial Control Panels for use in Hazardous (Classified) Locations, Model Nos. Custom Industrial Control Panels

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Enclosures for use in Class II, Groups E, F, G Hazardous Locations (CAN/CSA-C22.2 No. 25) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.

[<- Back](#)

Product Description

Title: EXPLOSION-PROOF ENCLOSURES FOR USE IN CLASS I HAZARDOUS LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Explosion-proof or dust-ignition-proof Industrial Control Panels for use in Hazardous (Classified) Locations, Model Nos. Custom Industrial Control Panels

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Explosion-Proof Enclosures for Use in Class I Hazardous Locations (CAN/CSA-C22.2 No. 30) and are identified with the cETL Listed Mark.

[<- Back](#)

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Material Safety Data Sheet

To Whom It May Concern,

Larson Electronics LLC EHL, EPL, EPLC2, HAL, HALP, HALD, HAL-LI, HALS, and HALSS industrial line of lights without emergency backup for hazardous locations are considered “ARTICLES” under 29 CFR 1910-1200, the OSHA Hazard Communication Standard, and do not require a Material Safety Data Sheet (MSDS).

Articles are specifically exempt from the regulations of this standard. OSHA defines an article as follows:

1910-1200(c) – Article means a manufactured item other than a fluid or particle:

- i. Which is formed to a specific shape or design during manufacture;
- ii. Which has end use function(s) dependent in whole or in part upon its shape or design during end use; and
- iii. Which under normal conditions does not release more than very small quantities.

The “hazardous location” and “explosion proof” are terminology for the environment where these products will be installed. This is not to be confused with “hazardous materials;” this product does not contain any hazardous materials.

Regards,

Ray Smith
Larson Electronics, LLC.


[<- Back](#)

Product Description

Title: ELECTRIC LIGHTING FIXTURES FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, AL-12-IPS-LED-1224DC, HAL-24-IPS-LED-1224DC, HAL-36-IPS-LED-1224DC, HAL-48-IPS-LED-1224DC; followed by -UVA, -UVB, -UVC, -IR, -C, -VISUV, -VISIR, -VISRED, -VISBLU, -VISGRN, -VISAMB, -27K, -30K, -40K, -45K, -50K, -55K, -56K, -60K, -65K, -DAYLIGHT, -750NM, -770NM, -850NM, -940NM, -1550NM, -RED, -BLU, -GRN, -AMB, or -PRPL.

LED Fixed Lighting suitable for used in Class I, Division 1, Groups C, D, Class I, Division 2, Groups A, B, C & D, T6, -25°C to +40°C., Model Nos. EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC. LED Fixed Lighting suitable for used in Class I Division 1 Group B C and D, Class I Division 2 Group A B C and D, Class II Division 1 Group E F and G, Class II Division 2 Group F and G and Class III hazardous locations, T6, -25°C to +40°C., Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

LED Luminaire for use in Class I, Division 1&2, Groups C&D, T5 Hazardous Location, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Luminaires, Model Nos. HAL-48-1L-LED-BMSW, HAL-48-2L-LED-BMSW, HAL-48-3L-LED-BMSW, HAL-24-1L-LED-BMSW, HAL-24-2L-LED-BMSW, HAL-24-3L-LED-BMSW. For use in Hazardous Locations, Class I, Division 2, Groups A, B, C and D; T3C, T4A or T5 -20°C < Tamb < 40°C.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

Evaluated to the following:

A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Lighting Fixtures for Use in Hazardous (Classified) Locations (UL-844) and are identified with the ETL Listed Mark.

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.


[<- Back](#)

Product Description

Title: LUMINAIRES

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

Fixed Luminaires, Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT, EPL-EMG-LB-100LED-RT, EPL-EMG-LB-150LED-RT, EPL-EMG-LB-200LED-RT.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZ, HAL-31L-LV-XX-Y-ZZZ, HAL-60W-HV-XX-Y-ZZZ.

Luminaires, Model Nos. HAL-48-1L-LED-BMSW, HAL-48-2L-LED-BMSW, HAL-48-3L-LED-BMSW, HAL-24-1L-LED-BMSW, HAL-24-2L-LED-BMSW, HAL-24-3L-LED-BMSW. For use in Hazardous Locations, Class I, Division 2, Groups A, B, C and D; T3C, T4A or T5 -20°C < Tamb < 40°C.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Surface-mounted Luminaire, Model Nos. EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC.

Wall mounted luminaire, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (UL-1598) and are identified with the ETL Listed Mark.

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.


[<- Back](#)

Product Description

Title: ELECTRIC LIGHTING FIXTURES FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA, AL-12-IPS-LED-1224DC, HAL-24-IPS-LED-1224DC, HAL-36-IPS-LED-1224DC, HAL-48-IPS-LED-1224DC; followed by -UVA, -UVB, -UVC, -IR, -C, -VISUV, -VISIR, -VISRED, -VISBLU, -VISGRN, -VISAMB, -27K, -30K, -40K, -45K, -50K, -55K, -56K, -60K, -65K, -DAYLIGHT, -750NM, -770NM, -850NM, -940NM, -1550NM, -RED, -BLU, -GRN, -AMB, or -PRPL.

LED Fixed Lighting suitable for used in Class I, Division 1, Groups C, D, Class I, Division 2, Groups A, B, C & D, T6, -25°C to +40°C., Model Nos. EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC. LED Fixed Lighting suitable for used in Class I Division 1 Group B C and D, Class I Division 2 Group A B C and D, Class II Division 1 Group E F and G, Class II Division 2 Group F and G and Class III hazardous locations, T6, -25°C to +40°C., Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZZ, HAL-31L-LV-XX-Y-ZZZZ, HAL-60W-HV-XX-Y-ZZZZ.

LED Luminaire for use in Class I, Division 1&2, Groups C&D, T5 Hazardous Location, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM, -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Luminaires, Model Nos. HAL-48-1L-LED-BMSW, HAL-48-2L-LED-BMSW, HAL-48-3L-LED-BMSW, HAL-24-1L-LED-BMSW, HAL-24-2L-LED-BMSW, HAL-24-3L-LED-BMSW. For use in Hazardous Locations, Class I, Division 2, Groups A, B, C and D; T3C, T4A or T5 -20°C < Tamb < 40°C.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

Evaluated to the following:

A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Electric Lighting Fixtures for Use in Hazardous (Classified) Locations (UL-844) and are identified with the ETL Listed Mark.

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.


[<- Back](#)

Product Description

Title: LUMINAIRES

Company: LARSON ELECTRONICS LLC - Kemp, TX USA

Product Information: Trade Name(s): Magna Light.

Fixed Luminaires, Model Nos. EPL-HB-100LED-RT, EPL-HB-150LED-RT, EPL-HB-200LED-RT, EPL-HB-240LED-RT, EPL-HB-300LED-RT, EPL-EMG-LB-100LED-RT, EPL-EMG-LB-150LED-RT, EPL-EMG-LB-200LED-RT.

LED Flood Light, Model Nos. EPLC2-HB-150LED-RT, EPLC2-LED-150W-RT, EPLC2-WPLED-150W-RT, EPLC2-HB-150LED-RT-48, EPLC2-HB-100LED-RT, EPLC2-HB-100LED-RT-UVA, EPL-HB-150LED-RT, EPL-LED-150W-RT, EPL-WPLED-150W-RT, EPL-HB-150LED-RT-48, EPL-HB-100LED-RT, EPL-HB-100LED-RT-UVA.

LED Light, Model Nos. HAL-7W-LED-XX-Y-ZZZ, HAL-XX-YYY-LED-XX-T-ZZZ, HAL-31L-LV-XX-Y-ZZZ, HAL-60W-HV-XX-Y-ZZZ.

Luminaires, Model Nos. EPL-48-2L-LED-SFC, EPL-24-2L-LED-SFC. for use in Hazardous Locations: Class I, Div. 1, Groups C and D T5 or T6 -20°C < Tamb < 40°C Class II, Div. 1., Groups E, F, and G; Class III Div.1 T3B -20°C < Tamb < 40°C

Surface-mounted Luminaire, Model Nos. EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-12-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-24-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC, EPL-LP-48-LED-SFC.

Wall mounted luminaire, Model Nos. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1227 or -1224; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -1347 or -347V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K. EPL-HB-50LED-RT; followed by -CM, -STNCH, -PT, -WM or -CLG; followed by -3480 or -480V; followed by -60DB, -100DB or -140DB; followed by -30K, -40K or -50K.

Evaluated to the following: A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.; A representative sample of the listed devices have been tested, investigated and found to comply with the requirements of the Standard(s) for Luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.

Contact Us

ETL listed products that are in doubt or for products that do not appear in the directory, please request a verification of certification.
Americas+1-888-347-5478
(or +1-847-660-7407)
Email
etldirectory@intertek.com

[Intertek Home](#)
[Product Directories](#)
[DLP on mobile devices](#)

Inspector Center

Get up-to-date information on everything from our Accreditations to our Certifications and Marks. [Learn more...](#)

News

Intertek Unveils New Design for Product Safety and Quality Certification Marks. [Learn more...](#)

[<- Back](#)

© 2010 Intertek All Rights Reserved.
All other product or service names are the property of their respective owners.



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: HALD-XX-150LED, HALD-XX-150LED Series
Description: Explosion Proof Lay-In LED Light

Evaluated Listings:

CE: DIRECTIVE 2014/35/EU - LOW VOLTAGE DIRECTIVE
CE: DIRECTIVE 2014/30/EU - EMC DIRECTIVE
CE: Regulation (EC) No 1907/2006 - REACH REGULATION
CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

The HALD-XX-150LED, HALD-XX-150LED Series complies with the essential protection requirements of the European Parliament of the Council Directive for Low Voltage Directive, EMC Directive, REACH Regulation, and RoHS Directive. This certification applies to all specimens manufactured in accordance to the manufacture's drawings.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: HALD-XX-150LED, HALD-XX-150LED Series
Description: Explosion Proof Lay-In LED Light

Evaluated Listings:

CE: DIRECTIVE 2015/863/EU - ROHS DIRECTIVE

This is to certify that products offered by Larson Electronics LLC comply with the Reduction of Hazardous Substances (RoHS) directives. Directive 2002/95/EC became effective on 1 July 2006. It restricts the use of six substances in the manufacture of electrical and electronic equipment. This directive was revised in June 2011 and is now referred to as directive 2011/65/EU. Directive 2015/863/EU amending Annex II to Directive 2011/65/EU announced plans to add four substances from 22 July 2019.

We hereby certify that the equipment specified above conforms to the Directive(s) by containing less of the restricted substances than the stated limits.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature: *James Thomas*

Name: James Thomas
Position: Operations Manager



Certification

Manufacturer: Larson Electronics LLC
Address: 9419 US-HWY 175
Kemp, Texas 75143

Declare the following equipment conforms to the standard(s) as listed:

Model: HALD-XX-150LED, HALD-XX-150LED Series
Description: Explosion Proof Lay-In LED Light

Evaluated Listings:

CE: Regulation (EC) No 1907/2006 - REACH REGULATION

This letter establishes the opinion of Larson Electronics LLC regarding the status, under the current European Union ("EU") Regulations on Registration, Evaluation, Authorization, and Restriction of Chemical Substances ("REACH").

REACH does not apply to manufactured products which are referred to as "completed articles". Substances (chemicals) are subject to REACH registration, NOT products.

In addition, Articles are exempt from the REACH requirements if (a) the Article does not contain a substance of very high concern or candidate substance in an amount exceeding 0.1% weight by weight, and (b) if substances present in the Article in excess of 1 ton per year per importer are not expected nor intended to be released.

Based on communication with our raw material suppliers, we conclude that to the best of our knowledge our products requiring REACH compliance do not contain any of the currently listed SVHC in concentrations of 0.1% or above.

Accordingly, we foresee no registration or pre-registration requirement for the products we supply.

Signed for and on behalf of: Larson Electronics, LLC
Place of issue: Kemp, TX

Signature:

Name: James Thomas
Position: Operations Manager

Frequently Asked Questions (FAQ)