
NOTES:
- SECURE ALL LEADS TO PREVENT INTERFERENCE WITH MOVING PARTS.
- STATOR LEADS TO BE CONNECTED TO TERMINAL BOARD PER ORIENTATION SHOWN TO ENSURE LEADS ARE KEPT FROM BORE.

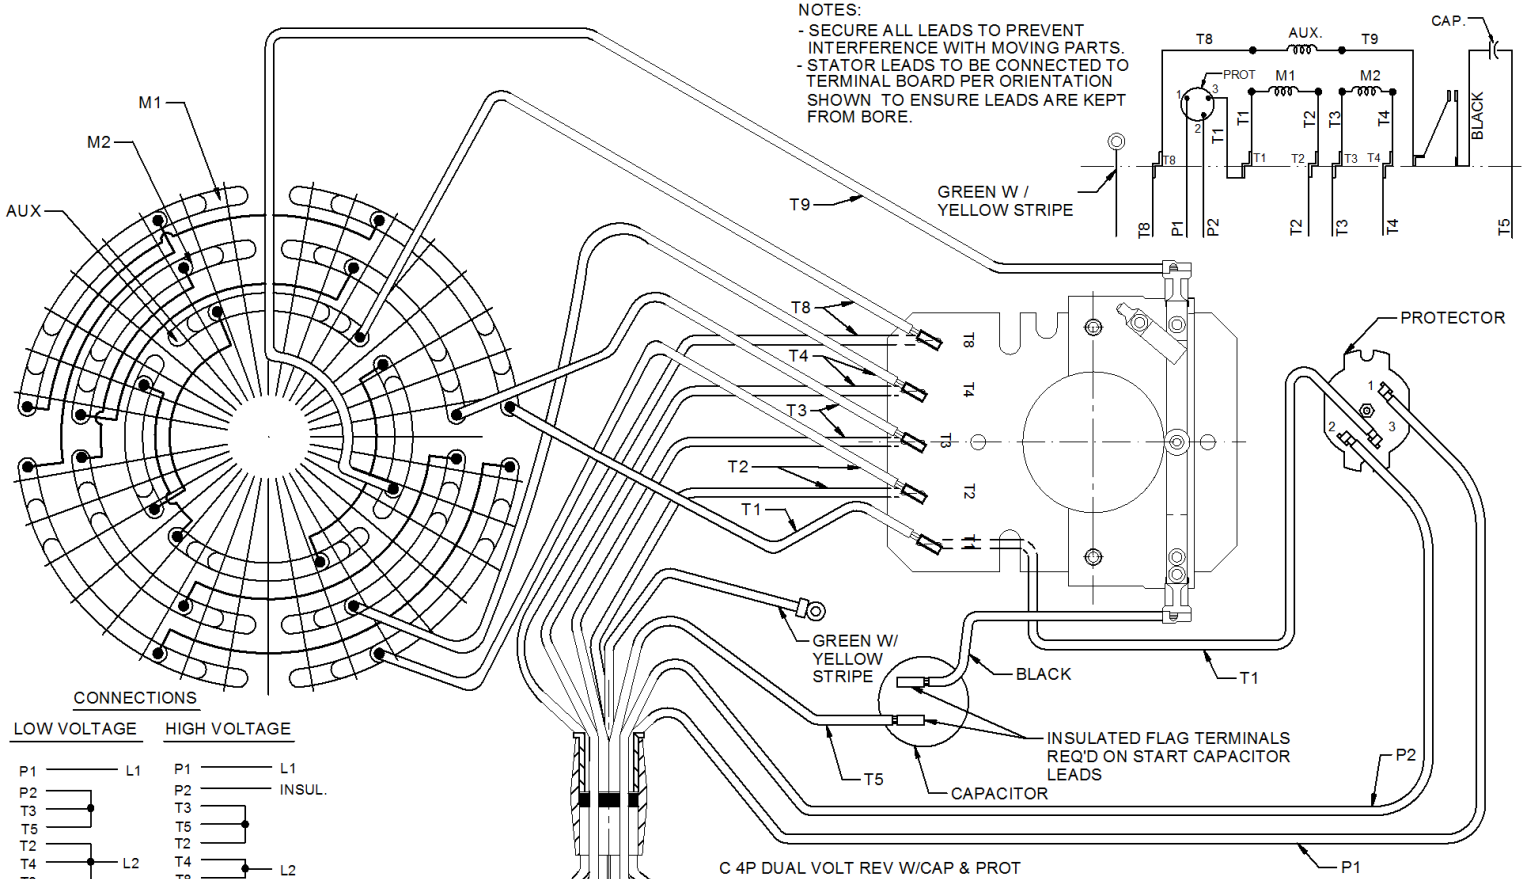

CONNECTIONS

LOW VOLTAGE	HIGH VOLTAGE
P1 — L1	P1 — L1
P2	P2 — INSUL.
T3	T3
T5	T5
T2	T2
T4 — L2	T4 — L2
T8	T8

ROTATION:
CCW SWITCH END REVERSIBLE
TO REVERSE ROTATION INTERCHANGE
T5 AND T8 LEADS

NIDEC CONFIDENTIAL
NIDEC MOTOR CORPORATION 12-Jul-12

C 4P DUAL VOLT REV W/CAP & PROT

REVISION DESCRIPTION FOR: MISC	SCALE: FULL	UNITS: IN	TITLE: DIAGRAM OF CONNECTIONS
	TOLERANCES ON DIMENSIONS (UNLESS OTHERWISE SPECIFIED)		
	INCHES	mm	
MATERIAL: MUST BE COMPLIANT TO RoHS DIRECTIVE EU 2002/95/EC AND REGULATION EC 1907/2006 (REACH) AS AMENDED	ANGLES X°= ±1°		ISSUED BY / APPROVED BY / REVISION DATE: 12-JUL-12
			CODE: D04 / DWG NO. / REV: B / SHEET NUMBER: 1 OF 1 / DWG SIZE: B

NMCB (MAR-2011)

SOLIDEDGE