


# Wiring Diagram

**WARNING: DO NOT SERVICE WHILE ENERGIZED!**

kVA 30  
 Phase 3  
 Hz 60  
 %IZ 4  
 Rise 150 °C  
 Ins. Class 220 °C  
 Weight 340 lbs  
 Class AA  
 Wdg. Mtl. Al

High Voltage: 380 Delta

Low Voltage: 208Y/120

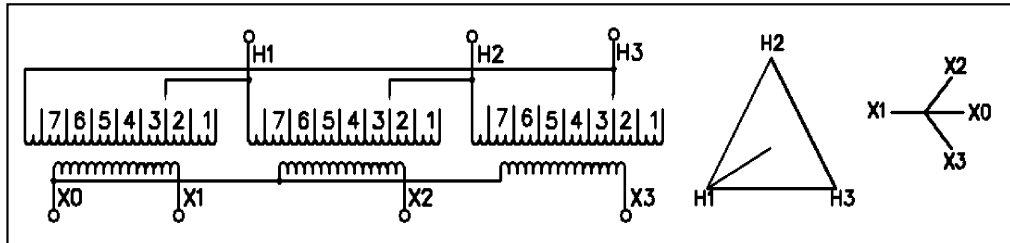

High Voltage: Lines on H1, H2, H3

Connect	1	2	3	4	5	6	7
Volts	399	390	380	371	361	352	342

Low Voltage: Lines on X1-X2-X3

Line - Line	Line - Neutral
208 V	120 V

Meets DOE-2016 Efficiency

Outdoor Type 3R