


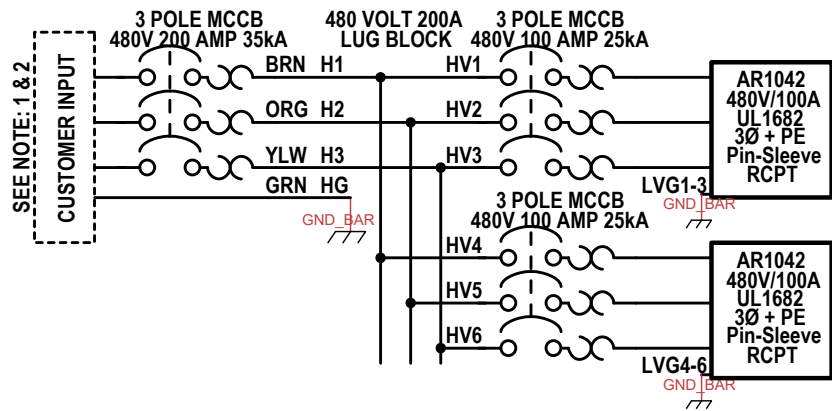

WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	#3/0 AWG cu
H2	CABLE	600V THHN ORANGE	#3/0 AWG cu
H3	CABLE	600V THHN YELLOW	#3/0 AWG cu
HG	CABLE	600V THHN GREEN	#6 AWG cu
HV1	CABLE	600V THHN BROWN	#2 AWG cu
HV2	CABLE	600V THHN ORANGE	#2 AWG cu
HV3	CABLE	600V THHN YELLOW	#2 AWG cu
HV4	CABLE	600V THHN BROWN	#2 AWG cu
HV5	CABLE	600V THHN ORANGE	#2 AWG cu
HV6	CABLE	600V THHN YELLOW	#2 AWG cu
HVG1-3	CABLE	600V THHN GREEN	#8 AWG cu
HVG4-6	CABLE	600V THHN GREEN	#8 AWG cu

USER NOTES:

- 1) USE MINIMUM 600V 200A WIRING
- 2) USE MINIMUM 480V 3PH 200A INPUT DEVICE

Title MPD-CD5-TB.200AB-DE0-P-2.T24-2.V06-M1		
Author David Downs		
File .:Users\U ... 480V 200A 3PH MCB 2xAR1042.dsn	Document RV21	
Revision 1.0	Date 03/10/2017	Sheets 1 of 1