THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R55-3P-GMF-150KVA-YE-LT-DF-A6-BB-CZ-2B4-M1


High Voltage		
Tap Position	Voltage (V)	Current (A)
1	26203	3.3
2	25564	3.4
3	24940	3.5
4	24317	3.6
5	23709	3.7
Low Voltage		
Voltage (V)		Current (A)
480		180.4

Rated Capacity	150	KVA
HV	24940GrdY/14400	V
LV	480Y/277	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YYN0	
Rated Frequency	60	Hz
Cooling Type	KNAN	


Product Code	291447		
Serial Number	XXXXX		
HV BIL	125	LV BIL	30
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	100		Gal
Total Weight	2550		LBS
Body Weight	1650		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil **Biodegradable Natural Vegtable Oil**

Wire Connection

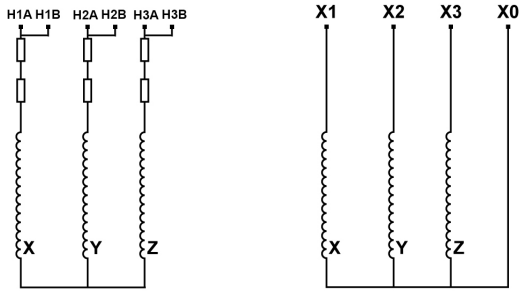

Phasor Diagram

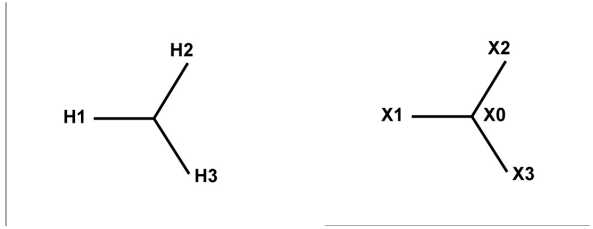

ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA