
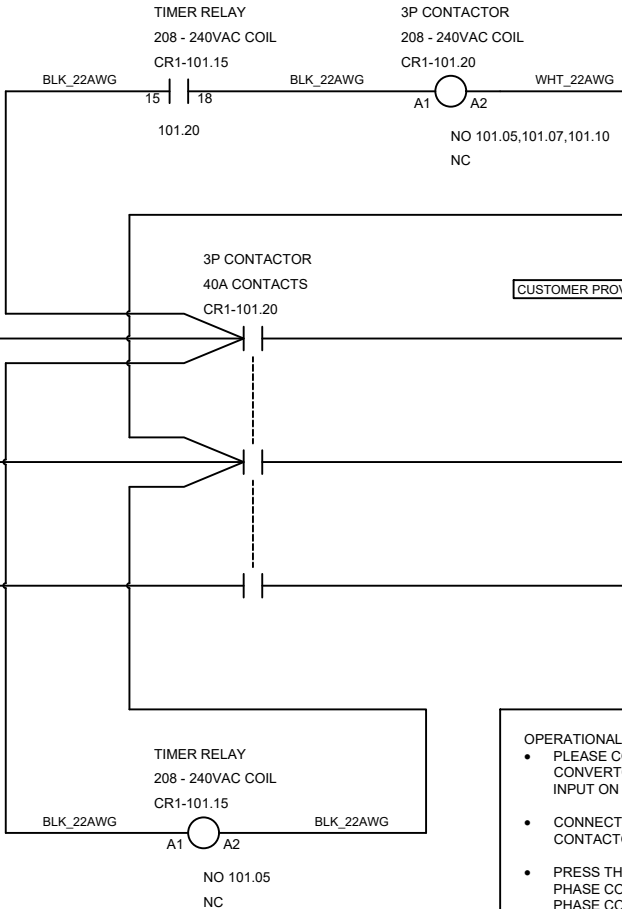


8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						04-03-2024
IND-CS-RLY.TDR-208V-240V-40A							
							
8	7	6	5	4	3	2	1

PLEASE NOTE:
USE FUNCTION A
(DELAY ON
ENERGISATION)

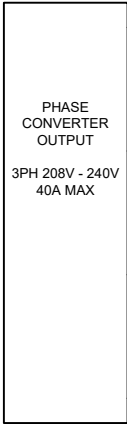

- OPERATIONAL GUIDELINES:
- PLEASE CONNECT THE PHASE CONVERTOR LOAD OUTPUT TO TERMINAL INPUT ON THE 3 POLE CONTACTOR.
 - CONNECT OUTPUT OF THE 3 POLE CONTACTOR TO LOAD.
 - PRESS THE START BUTTON ON THE PHASE CONVERTOR TO TURN ON THE PHASE CONVERTOR AND IDLER MOTOR.
 - POWER WILL BE DELAYED TO LOAD FOR 30 SECONDS AFTER PRESSING THE START BUTTON.

TAGS	QTY	CATALOG	DESCRIPTION
CR1-101.15	1	UNV00012442	Time Delay & Timing Relays 1X16A Multifunctional
CR1-101.20	1	UNV00014927	3P 40A 240V COIL CONTACTOR

 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE IND-CS-RLY.TDR-208V-240V-40A		
	DRAWN BY J.Maldonado	DATE 04-03-2024	REV A
	CHECKED BY S.Desai	SHEET # 1 OF 1	DRAWING # 101